

SERVICE

REF: **ENG 14-03**

CODE: National

DATE: December 9, 2014

Page 1 of 1


MODELS: FR/FS/FX 481V, 541V, 600V, 651V, 691V, 730V, 751V, 801V, 850V, 921V, 1000V (FXT00V), FH series

TITLE: CHANGE OIL VISCOSITY FOR AIR COOLED V TWIN 4 CYCLE ENGINE

GENERAL INFORMATION

Detail

Kawasaki has added 20W-50 grade oil to the viscosity table below. The viscosity table information in the manuals has also changed to match the table below.

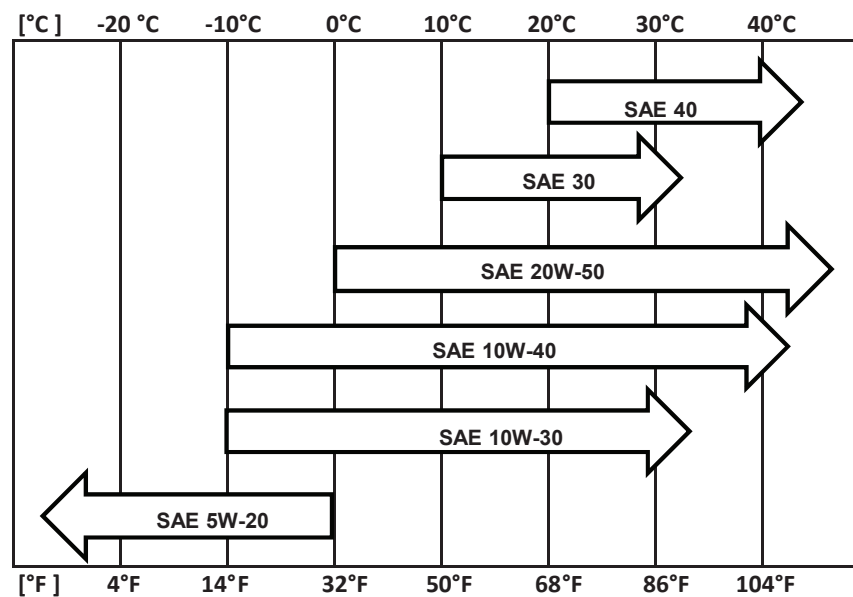

NOTE

o Although 10W-40 engine oil is the recommended oil for most conditions, the oil viscosity may need to be changed to accommodate seasonal temperature changes. Using 20W-50 oil in higher ambient temperatures may reduce oil consumption.

Changes to the oil viscosity table will be included in the updated service and owners manuals for the FR/FS/FX and the FH-D series engines however no change will be made to the manuals for the FH-V series engines.

Warranty Information

This is Service Information only, not warranty authorization.

KAWASAKI MOTORS CORP., U.S.A.

