



# MONEY IN YOUR POCKET

**Introducing SnowWolf AlphaBlowers**, aggressive and efficient snowblowers for hydraulic-drive high-flow skid steers, wheel loaders and PTO-drive tractors. In another snow removal industry first, our new AlphaBlowers combine the best of a hydraulic drive with an aggressive open ribbon design time-tested for decades in the high mountain passes of Norway.

## CONTENTS

**02 / 24-48-H** for Skid Steers and Compact Wheel Loaders

**04 / 33-100-H** for Wheel Loaders

**06 / 33-100-P** for Tractors

**08 / 36-106-P** for Tractors

**10 / Specifications**

## AlphaBlower<sup>TM</sup> 24-84-H

The serrated ribbons chew right into the hardest ice and snow and send it wherever you need it to go. They're essentially self-feeding, provide high-capacity dispersal and, thanks to SnowWolf's trademark design simplicity, cost less to operate.

See [AlphaBlower Specifications](#) on page 10.



FOR HIGH FLOW SKID STEERS AND COMPACT WHEEL LOADERS WITH 30-45 GPM

DELUXE 2-FLAP CHUTE FOR PRECISE CONTROL

MANUAL TILT-DOWN CHUTE FOR TRAVEL

SERRATED DRIFT CUTTER

EASY-ACCESS CHUTE CLEANOUT

STEEL SKID SHOES

FLOATING BACK FRAME

HARNESS TO USE MACHINE CONTROLS

AGGRESSIVE AR-400 OPEN RIBBON DESIGN

HIGH CAPACITY CUT-OUT CLUTCH



# AlphaBlower® 33-100-H

**HIGH CAPACITY, GREATER FLEXIBILITY.** On many sites, contractors and property managers appreciate that blowing back snow piles is a much more efficient alternative to hauling off site. Where truck loading is required, the AlphaBlower will pack in up to twice as many tons of snow per truck when compared to bucket loading, greatly reducing the number of truckloads.

Hydraulic-drive AlphaBlowers for wheel loaders give you excellent performance, maximize uptime and reduce fuel and maintenance costs. See [AlphaBlower Specifications](#) on page 10.

DELUXE 4-FLAP CHUTE FOR PRECISE CONTROL

OPTIONAL TRUCK LOADING CHUTE

STANDARD STUCCHI COUPLERS

MANUAL TILT-DOWN CHUTE FOR TRAVEL

SERRATED DRIFT CUTTER

AGGRESSIVE AR-400 OPEN RIBBON DESIGN

CAT IT & FUSION MOUNTS




# 33-1004

## KEY FEATURES



**AGGRESSIVE OPEN RIBBON DESIGN.** No more jamming into drifts and piles. The Hardox 500 abrasion-resistant steel ribbon is serrated so it **chews right into snow and ice and feeds it into the fan.**

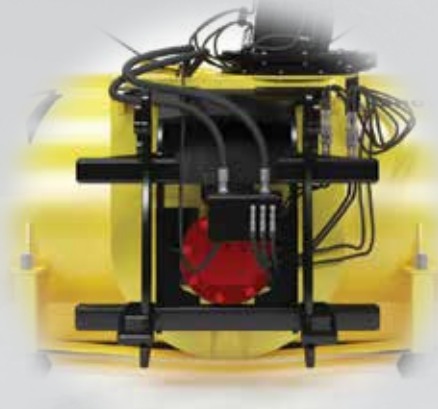

**TRANSFER OF POWER.** Gigantic radial piston motor gives you incredible efficiency and **puts every ounce of available horsepower to work.**



**WIRELESS CONTROLLER** allows the operator to **easily control all chute and optional wing functions with either hand.**



**SAFETY BUILT IN!** A hydraulic relief system protects the fan, and dual automatic cut-out clutches protect the auger ribbon, **eliminating the hassle of changing shear bolts from obstacle strikes.**

## OPTIONAL EQUIPMENT



Part No. TLC-33100

**TELESCOPIC TRUCK LOADING CHUTE** extends from its baseline height of 11 feet 3 inches up to 13 feet 5 inches.



Part No. GW-33100

**FOAM-FILLED GAUGE WHEELS** adjust vertically to create a gap between the skid shoes and the plowing surface to reduce wear to the shoes.



Part No. HC-33100

**HYDRAULIC CHUTE TILT** for raising and lowering makes it easy to position the chute safely down and out of the way when hauling from one site to another.



Part No. HWC-33100

**HYDRAULIC WING CUTTER** extends the clearing width by 14 to 27 inches to cut deeper into the snow pack to reveal curb lines.



Part No. SK-33100

**SIDE PANELS** can be installed for precise containment in high traffic areas.



# AlphaBlower™ 33-100-P

**HIGH CAPACITY, GREATER FLEXIBILITY.** In a wolf pack, the Alpha is the king. Among PTO snow blowers, the AlphaBlower reigns supreme. Unique to the AlphaBlower is the ability to mount it in three positions: front facing, rear facing or pull-type.

This aggressive, high-performing, industrial quality blower rivals the performance of an engine-driven snow blower on a loader, but at a fraction of the cost. Great for high volume snow relocation. See [AlphaBlower Specifications](#) on page 10.

OPTIONAL TRUCK LOADING CHUTE

DELUXE 4-FLAP CHUTE FOR PRECISE CONTROL


SERRATED DRIFT CUTTER

MANUAL TILT-DOWN CHUTE FOR TRAVEL


AGGRESSIVE AR-400 OPEN RIBBON DESIGN




## KEY FEATURES



PULL-TYPE



REAR FACING




FRONT FACING

**AGGRESSIVE OPEN RIBBON DESIGN.** No more jamming into drifts and piles. The Hardox 500 abrasion-resistant steel ribbon is serrated so it **chews right into snow and ice and feeds it into the fan.**

**ONE BLOWER, MULTIPLE MOUNTING OPTIONS.** Unique to the AlphaBlower is the ability to **mount it in three positions: front facing, rear facing or pull-type.** Switch from rear-facing to pull-type in minutes with a single pin. See page 11 for details on mount options.

**SAFETY BUILT IN!** A hydraulic relief system protects the fan, and dual automatic cut-out clutches protect the auger ribbon, **eliminating the hassle of changing shear bolts from obstacle strikes.**

## OPTIONAL EQUIPMENT



Part No. TLC-33100

### TELESCOPIC TRUCK LOADING CHUTE

extends from its baseline height of 11 feet 3 inches up to 13 feet 5 inches.



Part No. GW-33100

**FOAM-FILLED GAUGE WHEELS** adjust vertically to create a gap between the skid shoes and the plowing surface to reduce wear to the shoes.



Part No. HC-33100

**HYDRAULIC CHUTE TILT** for raising and lowering makes it easy to position the chute safely down and out of the way during transport.




Part No. SK-33100

**SIDE PANELS** can be installed for precise containment in high traffic areas.



Part No. HWC-33100

**HYDRAULIC WING CUTTER** extends the clearing width by 14 to 27 inches to cut deeper into the snow pack to reveal curb lines.



Part No. FMT-33100

**REVERSING GEARBOX** For front mount PTO drive operation (Not needed for rear mount PTO drives). See page 11 for details on mount options.



# AlphaBlower™ 36-106-P

**THE BIG DOG.** When you have to move the maximum volume of snow per hour you'll appreciate the sheer blower force and dependability of the AlphaBlower 36-106-P. Incredible performance that will match that of an engine-drive blower at a fraction of the cost. See [AlphaBlower Specifications](#) on page 10.

DELUXE 4-FLAP CHUTE FOR PRECISE CONTROL

OPTIONAL TRUCK LOADING CHUTE

HYDRAULIC TILT-DOWN CHUTE FOR TRAVEL

SERRATED DRIFT CUTTER

GAUGE WHEELS STANDARD

AGGRESSIVE AR-400 OPEN RIBBON DESIGN




# 36-106 P


## KEY FEATURES



**AGGRESSIVE OPEN RIBBON DESIGN.** No more jamming into drifts and piles. The Hardox 500 abrasion-resistant steel ribbon is serrated so it **chews right into snow and ice effortlessly pulling it into the fan.**



REAR FACING




FRONT FACING

**ONE BLOWER, MULTIPLE MOUNTING OPTIONS.** With the reverser, a standard feature on this model, you can **choose between front mount and rear mount on your tractor at no additional cost.** [See page 11 for details on mount options.](#)



**SAFETY BUILT IN!** A high capacity cut-out clutch **protects both the fan and the gear box from obstacle strikes.**

## OPTIONAL EQUIPMENT



Part No. TLC-36106

**TELESCOPIC TRUCK LOADING CHUTE** extends from its baseline height up to 12 feet 11 inches for easy blowing into tall trucks.



# AlphaBlower Specifications



## AlphaBlower™ 24-84-H

Hydraulic Flow: 40-50 GPM



## AlphaBlower™ 33-100-H

Hydraulic Flow: 40-50 GPM



## AlphaBlower™ 33-100-P

PTO Power : 100-250 HP



## AlphaBlower™ 36-106-P

PTO Power : 150-350 HP


| Model Number                             | 24-84-H            | 33-100-H           | 33-100-P           | 36-106-P           |
|--|--------------------|--------------------|--------------------|--------------------|
| Width of Auger (cm)                      | 85" (216)          | 100" (254)         | 100" (254)         | 106" (269)         |
| Overall Width at Drift Breakers (cm)     | 90" (229)          | 106.5" (270)       | 106.5" (270)       | 111" (282)         |
| Center Cutting Height (cm)               | 36" (91)           | 41" (104)          | 41" (104)          | 46" (117)          |
| Side Cutting Height (cm)                 | 57" (145)          | 75" (190)          | 75" (190)          | 75" (190)          |
| Impeller Diameter (cm)                   | 24" (61)           | 33" (84)           | 33" (84)           | 36" (91)           |
| Impeller Depth (cm)                      | 9" (23)            | 11" (28)           | 11" (28)           | 14" (35)           |
| Auger Diameter (cm)                      | 28" (71)           | 33" (84)           | 33" (84)           | 38" (96)           |
| Weight (kg)                              | 2,400 lbs (1,089)* | 3,900 lbs (1,769)* | 3,650 lbs (1,659)  | 4,120 lbs (1,869)  |
| Min. 3-Point Hitch Lift Capacity (kg)    | N/A                | N/A                | 5,500 lbs (2,495)  | 6,800 lbs (3,085)  |
| Hardox 500 Reversible Cutting Edges (cm) | ½" x 8" (1.2 x 12) | ½" x 8" (1.2 x 12) | ½" x 8" (1.2 x 12) | ½" x 8" (1.2 x 12) |
| Hardox 500 Side Skids                    | Standard           | Standard           | Standard           | Standard           |
| Hardox Impeller Housing                  | Standard           | Standard           | Standard           | Standard           |
| Auto Reset Hydraulic Cut-out Clutch(es)  | Standard (2)       | Standard (2)       | Standard (2)       | Standard (1)       |
| HD Upper Wing Edges (Drift Breakers)     | Standard           | Standard           | Standard           | Standard           |
| Screw Adjustable Gauge Wheels            | N/A                | Optional           | Optional           | Standard           |
| Hydraulic Chute Rotation                 | Standard           | Standard           | Standard           | Standard           |
| Deluxe HD Chute (2- or 4-Flap)           | 2-Flap             | 4-Flap             | 4-Flap             | 4-Flap             |
| Hydraulically Collapsible Chute          | N/A                | Optional           | Optional           | Standard           |
| HD Truck Loading Chute                   | N/A                | Optional           | Optional           | Optional           |
| PTO Stub Shaft Diameter                  | N/A                | N/A                | 1-¾"               | 1-¾"               |
| PTO ( RPM )                              | N/A                | N/A                | 540** or 1,000     | 1,000              |
| PTO Shaft Included                       | N/A                | N/A                | Standard           | Standard           |
| Recommended GPM (LPM)                    | 32-45 (120-170)    | 40-50 (150-190)    | N/A                | N/A                |
| Recommended PTO HP                       | N/A                | N/A                | 130 - 250          | 150 - 350          |
| To Fit Rear Mount PTO                    | N/A                | N/A                | Standard           | Standard           |
| To Fit Rear Mount PTO (towing position)  | N/A                | N/A                | Standard           | N/A                |

\* With Cat Fusion mount


\*\* 540 RPM not currently stocked




# AlphaBlower Mounting Options



**FRONT-FACING** / 24-48-H, 33-100-P\* & 36-106-P  
\* Add Part No. FMT-33100



**REAR-FACING** / 33-100-P & 36-106-P



**PULL-TYPE** / 33-100-P



# CLEAR **THE WAY**



15100 Business Parkway  
Rosemount, MN 55068

1 800 905.2265  
T 952.224.4430  
F 952.224.4444

info@snowwolfplows.com  
snowwolfplows.com