



RIGGING

*Blocks
Pulleys
Slings
Runners*

Stainless Steel Rigging Blocks

Regarded as some of the strongest and most reliable pulleys available



Features & Benefits

- Designed specifically to be used in false crotch systems to save wear and tear on bull ropes
- Heavy duty
- RP130:
 - Max rope diameter: 5/8"
 - Tensile strength: 28,000 lbs
 - WLL: 4,000 lbs
 - Weight: 2.25 lbs
- RP131:
 - Max rope diameter: 3/4"
 - Tensile strength: 40,000 lbs
 - WLL: 6,000 lbs
 - Weight: 5.38 lbs

PART #	DESCRIPTION
RP130	5/8" Max Rope Diameter
RP131	3/4" Max Rope Diameter

Aluminum Rigging Blocks

Designed to eliminate virtually all friction when removing heavy limbs



Features & Benefits

- Stainless steel sheave with bushing pins
- Epoxy polyester coating over aluminum
- 50007S:
 - Max rope diameter: 5/8"
 - Tensile strength: 22,000 lbs
 - WLL: 4,400 lbs
 - Weight: 3lbs 5oz
- 50007L:
 - Max rope diameter: 3/4"
 - Tensile strength: 22,500 lbs
 - WLL: 4,496 lbs
 - Weight: 4lbs 12oz

PART #	DESCRIPTION
50007S	5/8" Max Rope Diameter
50007L	3/4" Max Rope Diameter

False Crotch Block Sling

Aluminum block with composite double braid bull rope and dead eye sling featuring a nylon core and polyester cover



Features & Benefits

- Aluminum block with composite double braid bull rope with dead eye sling
- Rigging block accommodates rope up to 1" in diameter
- Dead eye sling rope diameter is 3/4" with a 25,700lb tensile strength.
- Rope features nylon core and polyester cover
- Urethane coated for abrasion resistance.
- 6" eye on one end

PART # FCBS16



Port-A-Wrap III

Designed to make attachment of rigging line easier



601L



601LN

Features & Benefits

- User friendly, designed to make attachment of rigging line easier
- Safe working load of 2,000 lbs
- Rope retensioning bar
- Second eye for lifting limbs
- Strong and durable steel construction
- Max rope size: 3/4"
- 9.5" length x 11" height x 2.4" OD
- 601L — Powder coated
- 601LN — Nickel coated

PART #	DESCRIPTION
601L	Powder Coated Port-A-Wrap III
601LN	Nickel Coated Port-A-Wrap III



Dead Eye Slings

Double-braid/composite construction of polyester cover over nylon core



Features & Benefits

- Double braid/composite construction of polyester cover over nylon core for higher tensile strength and better shock load performance
- Urethane coated for abrasion resistance
- 6" eye on one end w/ heavy duty chafe guard
- ADE20C5-10E — 5/8" diameter, 15,300 tensile strength, 10' length
- ADE20C5-15E — 5/8" diameter, 15,300 tensile strength, 15' length
- ADE24C5-15E — 3/4" diameter, 25,700 tensile strength, 15' length
- ADE24C5-18E — 3/4" diameter, 25,700 tensile strength, 18' length

PART #	DESCRIPTION
ADE20C5-10E	5/8" dia. 10' length
ADE20C5-15E	5/8" dia. 15' length
ADE24C5-15E	3/4" dia. 15' length
ADE24C5-18E	3/4" dia. 18' length

Adjustable Whoopie Slings

Adjustable, load-rated two-eye lifting slings



© Samson Rope Technologies

Features & Benefits

- A permanent eye splice at one end and an adjustable eye at the other
- Adapts to varying loads
- Snug lifting control
- Minimizes the number of fixed length slings req'd
- Permanently tagged with capacity
- WS0328 — 1/2" diameter, 2.5' - 4' length, 5" eye, 2,200 cap single leg
- WS0404 — 5/8" diameter, 3' - 5' length, 6" eye, 3,200 cap single leg
- WS0486 — 3/4" diameter, 3.5' - 6' length, 7" eye, 4,200 cap single leg
- WS1062 — 3/4" diameter, 3.5' - 10' length, 7" eye, 4,200 cap single leg
- WS1462 — 3/4" diameter, 3.5' - 14' length, 7" eye, 4,200 cap single leg

PART #	DESCRIPTION
WS0328	1/2" dia., 2.5' - 4' length
WS0404	5/8" dia., 3' - 5' length
WS0486	3/4" dia., 3.5' - 6' length
WS1062	3/4" dia., 3.5' - 10' length
WS1462	3/4" dia., 3.5' - 14' length

Nylon Loop Runners

Constructed of tubular nylon webbing, these serve as medium-duty choker straps for tree work and climbing



Features & Benefits

- These lightweight loop runners are as strong and durable as rope
- Circular construction distributes wear more evenly because you'll seldom clip into the same spot twice
- Use for speed line chokers, line redirections, miniature false crotch support systems, a limb handle or providing a footstep where none exists
- Safe working load information: 7,000 Ultimate Breaking Strength (UBS), 1,400 Safe Working Load (SWL), 31 Kilonewtons (kN)
- 08982300Y — 12" length, yellow, 7,000lb breaking strength, 1,400lb safe working load
- 0898230RD — 12" length, red, 7,000lb breaking strength, 1,400lb safe working load
- 0898231BO — 24" length, orange, 7,000lb breaking strength, 1,400lb safe working load
- 0898232OY — 30" length, yellow, 7,000lb breaking strength, 1,400lb safe working load
- 0898233BO — 36" length, orange, 7,000lb breaking strength, 1,400lb safe working load
- 0898234BO — 48" length, orange, 7,000lb breaking strength, 1,400lb safe working load

PART #	DESCRIPTION
08982300Y	12" Length, Yellow
0898230RD	12" Length, Red
0898231BO	24" Length, Orange
0898232OY	30" Length, Yellow
0898233BO	36" Length, Orange
0898234BO	48" Length, Orange



Light-Duty Nylon Slings

These nylon webbing slings come in three lengths perfect for a variety of light-duty lifting tasks

Features & Benefits

- Constructed from durable, pliable 1" nylon webbing with 3-1/2" loops at each end
- Built with a 5 to 1 safety factor
- Have a 1,200 lb rating for vertical lifting, a 2,400 lb rating for basket lifting and a 960 lb rating for choke hold
- 089823530 — 30" Length
- 089823540 — 40" Length
- 089823562 — 62" Length


089823530



089823540



089823562

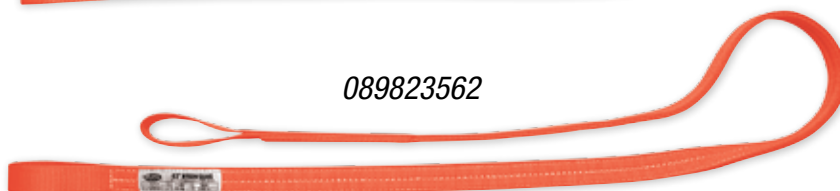

PART #	DESCRIPTION
089823530	30"
089823540	40"
089823562	62"



Massdam Pow-R-Pull

This rope ratchet device is used to pull trees, logs, raise or lower loads and often to stretch fences

Features & Benefits

- The "notch-at-a-time" rope ratcheting device has a maximum capacity of 1,500 lbs and can accommodate an unlimited length of rope
- Designed to be used with 1/2" three strand rope like Pro Master or Tree Master, but can also be used with 1/2" braided ropes like Arbor Plex, True Blue or True White.
- Rope is not included



PART # A-0



**MAASDAM
POW'R-PULL**
INCORPORATED

Rope not included