



SNOWMOBILES
SERVICE
 Bulletin



October 11th, 2012 Subject: **High Altitude / Sea Level Specifications**

No. **2013-2**

REVISION 1
October 19th, 2012

YEAR	MODEL	MODEL NUMBER	SERIAL NUMBER
2013	All	All	All

[▶Text\(s\) between arrows is \(are\) modified element\(s\) to the original publication.◀](#)

MODIFICATION OVERVIEW

MODEL	MODIFICATION
▶Freeride 146" and 154" 800R E-TEC (europe) Summit X 146", 154" and 163" 800R E-TEC (europe)◀	▶In Drive Pulley table: 1 set screw/16 mm (P/N 206 261 699)◀
▶Freeride 146" and 154" 800R E-TEC Freeride 154" 800R E-TEC (Racing, Track profile of 57 mm (2-1/4 in)) Summit SP 146", 154" and 163" 800R E-TEC◀	▶Addition of models: Summit X 146", 154" and 163" 800R E-TEC In Drive Pulley table: 1 set screw/16 mm (P/N 206 261 699)◀

TABLE OF CONTENTS

	Page		Page
GENERAL INFORMATION	4	Additional Information	11
Previous Model Year Vehicles	4	EXPEDITION® SPORT 550F / SKANDIC	
Reverse Connector	4	TUNDRA SPORT 550F / SKANDIC	
Table Format	4	TUNDRA LT 550F (ALL)	12
Sea Level Calibration Kit	4	Drive Pulley	12
GRAND TOURING SPORT 550F (ALL) /		Driven Pulley	12
RENEGADE™ SPORT 550F (ALL)	6	Carburation	13
Drive Pulley	6	Main Jet Chart	13
Driven Pulley	6	Additional Information	14
Carburation	7	SKANDIC WT 550F (ALL)	15
Main Jet Chart	7	Drive Pulley	15
Additional Information	8	Driven Pulley	15
MX Z™ SPORT 550F (ALL)	9	Carburation	16
Drive Pulley	9	Main Jet Chart	16
Driven Pulley	9	GRAND TOURING SPORT 600	17
Carburation	10	Drive Pulley	17
Main Jet Chart	10	Driven Pulley	17

Carburation	18
Main Jet Chart	18
MX Z SPORT 600	19
Drive Pulley.....	19
Driven Pulley	19
Carburation	20
Main Jet Chart	20
SUMMIT™ SPORT 146" 600.....	21
Drive Pulley.....	21
Driven Pulley	21
Carburation	22
Main Jet Chart	22
Vehicle Calibration	23
EXPEDITION LE 600 H.O. E-TEC® (ALL) / EXPEDITION SE 600 H.O. E-TEC (ALL) .	24
Drive Pulley.....	24
Driven Pulley	24
SKANDIC WT 600 H.O. E-TEC (ALL) / SKANDIC SWT 600 H.O. E-TEC	25
Drive Pulley.....	25
Driven Pulley	25
GSX™ LE 600 H.O. E-TEC®.....	26
Drive Pulley.....	26
Driven Pulley	26
GRAND TOURING LE 600 H.O. E-TEC (ALL) / GSX™ SE 600 H.O. E-TEC.....	27
Drive Pulley.....	27
Driven Pulley	27
MX Z TNT 600 H.O. E-TEC (ALL) / MX Z™ X™ 600 H.O. E-TEC (ALL) / MX Z X-RS™ 600 H.O. E-TEC (ALL) / RENEGADE ADRENALINE 600 H.O. E-TEC (ALL) / RENEGADE™ BACKCOUNTRY™ 600 H.O. E-TEC / RENEGADE BACKCOUNTRY X 600 H.O. E-TEC (ALL) / RENEGADE X 600 H.O. E-TEC	28
Drive Pulley.....	28
Driven Pulley	28
SKANDIC TUNDRA Xtreme 600 H.O. E-TEC (CAN/USA).....	29
Drive Pulley.....	29
Driven Pulley	29
Vehicle Calibration	29
SKANDIC TUNDRA Xtreme 600 H.O. E-TEC (EUROPE).....	30
Drive Pulley.....	30
Driven Pulley	30
Vehicle Calibration	30

SUMMIT SP™ 146" AND 154" 600 H.O. E-TEC.....	31
Drive Pulley.....	31
Driven Pulley	31
Vehicle Calibration	31
SUMMIT SP 146" 600 H.O. E-TEC (EUROPE)	32
Drive Pulley.....	32
Driven Pulley	32
Vehicle Calibration	32
SUMMIT SPORT 154" 800R POWER TEK	33
Drive Pulley.....	33
Driven Pulley	33
Carburation	34
Main Jet Chart	34
Vehicle Calibration	35
SUMMIT SPORT 154" 800R POWER TEK (EUROPE)	36
Drive Pulley.....	36
Driven Pulley	36
Carburation	37
Main Jet Chart	37
Vehicle Calibration	38
FREERIDE™ 137" 800R E-TEC (ALL, Track with profile of 44.5 mm (1-3/4 in)).....	39
Drive Pulley.....	39
Driven Pulley	39
Vehicle Calibration	39
FREERIDE™ 137" 800R E-TEC (ALL, Track with profile of 57 mm (2-1/4 in))	40
Drive Pulley.....	40
Driven Pulley	40
Vehicle Calibration	40
FREERIDE 146" AND 154" 800R E-TEC (EUROPE) / SUMMIT X 146", 154" AND 163" 800R E-TEC (EUROPE).....	41
▶Drive Pulley◀	41
Driven Pulley	41
Vehicle Calibration	41
Chaincase Gears.....	41
▶FREERIDE 146" AND 154" 800R E-TEC / FREERIDE 154" 800R E-TEC (RACING, Track with profile of 57 mm (2-1/4 in))SUMMIT SP 146", 154" AND 163" 800R E-TECSUMMIT X 146", 154" AND 163" 800R E-TEC◀	43
▶Drive Pulley◀	43
Driven Pulley	43

Vehicle Calibration	43
Chaincase Gears	44
GSX SE 800R E-TEC	45
Drive Pulley.....	45
Driven Pulley	45

MX Z TNT 800R E-TEC / MX Z X 800R E-TEC / MX Z X-RS 800R E-TEC (ALL) .	46
Drive Pulley.....	46
Driven Pulley	46

RENEGADE ADRENALINE 800R E-TEC / RENEGADE X 800R E-TEC	47
Drive Pulley.....	47
Driven Pulley	47

RENEGADE BACKCOUNTRY 800R E-TEC / RENEGADE BACKCOUNTRY X 800R E-TEC (ALL).....	48
Drive Pulley.....	48
Driven Pulley	48

EXPEDITION SPORT 600 ACE™ / RENEGADE™ SPORT 600 ACE (ALL)....	49
Drive Pulley.....	49
Driven Pulley	49

SKANDIC TUNDRA SPORT 600 ACE / SKANDIC TUNDRA LT 600 ACE (ALL) ..	50
Drive Pulley.....	50
Driven Pulley	50

GRAND TOURING SPORT 600 ACE (ALL) / MX Z SPORT 600 ACE (ALL).....	51
Drive Pulley.....	51
Driven Pulley	51

GRAND TOURING SPORT 600 ACE (EUROPE)	52
Drive Pulley.....	52
Driven Pulley	52

SKANDIC WT 600 ACE (ALL) / SKANDIC SWT 600 ACE	53
Drive Pulley.....	53
Driven Pulley	53

EXPEDITION LE 1200 4-TEC® (ALL) / EXPEDITION SE 1200 4-TEC	54
Drive Pulley.....	54
Driven Pulley	54

GSX LE 1200 4-TEC GSX SE 1200 4-TEC GRAND TOURING LE 1200 4-TEC / GRAND TOURING SE 1200 4-TEC (ALL)MX Z TNT 1200 4-TEC / MX Z X	
--	--

1200 4-TECRENEGADE ADRENALINE 1200 4-TEC / RENEGADE X 1200 4-TEC (ALL).....	55
Drive Pulley.....	55
Driven Pulley	55

GENERAL INFORMATION

Previous Model Year Vehicles

This bulletin supplies all the information required to modify current year vehicles for high altitude and/or sea level riding.

MODEL YEAR	LATEST REVISION OF BULLETIN NO.
2012	2012-4
2011	2011-6
2010	2010-5
2009	2009-5
2008	2008-6

NOTE: Throughout this entire document, shaded areas give factory settings (that could apply through different altitudes) while N/A stands for "not applicable".


NOTICE The following modifications and adjustments apply for high altitude operation as well as sea level operation.

PARTS AND LABOR COST ARE NOT COVERED BY BRP LIMITED WARRANTY.

Reverse Connector

The reverse connector (P/N 515 174 700) is used at 1 800 m (6,000 ft) altitude and higher for all FAN cooled models with electronic reverse device. To use Reverse Connector proceed as follows:

1. Unplug existing sea level cap from the ECM.
2. Plug-in the reverse connector.

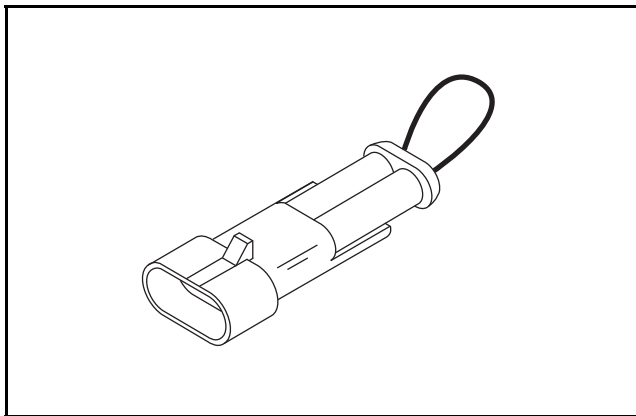

REVERSE CONNECTOR

Table Format

The shady portions of the table indicate factory settings.

ALTITUDE	
Part to be modified	Recommended Adjustment

Sea Level Calibration Kit

When the high altitude calibration must be modified to sea level calibration on Freeride and Summit models (146" and up), the following kits may be used. These kits include all required parts to set-up the vehicle.

MODEL	PART NUMBER
Summit Sport 800 Power TEK	
154"	860 200 394
Freeride and Summit 800R E-TEC	
146" and 154" Racing	860 201 007
154"	860 201 008
163"	860 201 009

Kit Description

SEA LEVEL CALIBRATION KIT (P/N 860 200 394)		
DESCRIPTION	PART NUMBER	QTY
Ramp 413	417 222 508	3
Long solid Pin 35,75 mm/18,8 g	417 222 594	3
Cotter pin	250 400 060	3
Spring (Blue/Purple)	414 817 800	1
M14 Spring washer	250 200 006	1

SEA LEVEL CALIBRATION KIT (P/N 860 201 007)		
DESCRIPTION	PART NUMBER	QTY
Ramp 413	417 222 508	3
Long solid pin 35,75 mm/18,8 g	417 222 594	3
Cotter pin	250 400 060	3
Spring (Yellow/green)	414 742 100	1
M14 spring washer	250 200 006	1
Upper gear - 23 teeth	504 091 000	1

SEA LEVEL CALIBRATION KIT (P/N 860 201 008)		
DESCRIPTION	PART NUMBER	QTY
Ramp 413	417 222 508	3
Long solid pin 35,75 mm/18,8 g	417 222 594	3
Cotter pin	250 400 060	3
Spring (Yellow/green)	414 742 100	1
M14 spring washer	250 200 006	1
Upper gear - 23 teeth	504 091 000	1
Chain - 106 links	504 152 630	1

SEA LEVEL CALIBRATION KIT (P/N 860 201 009)		
DESCRIPTION	PART NUMBER	QTY
Ramp 413	417 222 508	3
Long solid pin 35,75 mm/18,8 g	417 222 594	3
Cotter pin	250 400 060	3
Spring (Yellow/green)	414 742 100	1
M14 spring washer	250 200 006	1
Upper gear - 23 teeth	504 091 000	1
Chain - 108 links	504 152 631	1

GRAND TOURING SPORT 550F (ALL) / RENEGADE™ SPORT 550F (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	730 (P/N 417 223 558)		734 (P/N 417 223 678)			
Ramp quantity	6					
Engagement RPM ± 100	2600					
Maximum RPM ± 100	6800					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Brown (P/N 417 127 061)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	47-44° (P/N 417 127 109)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	190	180	170	160	140	130	1
	PTO	200	190					1
Jet needle		6BFY46						2
MAG Needle position		3		2				—
PTO Needle position		4		2				—
Slide cut-away		2.5						2
Pilot jet		35		45		55		2
MAG mixture screw		1.25						—
PTO mixture screw		1		1.25				—
Valve seat		1.2						2
Needle jet		P-8 (159)				P-6 (159)		2
Float level (± 1 mm)		23.9						—
Idle RPM (± 200)		1650						—
Idle throttle valve position (± 0.1 mm)		1.6		1.8	2	2.2	2.4	—

Main Jet Chart

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
-40°C (-40°F)	MAG	200	190	180	170	150	140
	PTO	210	200				
-30°C (-22°F)	MAG	195	185	175	165	145	135
	PTO	205	195				
-20°C (-4°F)	MAG	190	180	170	160	140	130
	PTO	200	190				
-10°C (14°F)	MAG	185	175	165	155	135	125
	PTO	195	185				
0°C (32°F)	MAG	180	170	160	150	130	120
	PTO	190	180				
10°C (50°F)	MAG	175	165	155	145	125	115
	PTO	185	175				
20°C (68°F)	MAG	170	160	150	140	120	110
	PTO	180	170				

Additional Information

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Reverse connector		(P/N 515 174 800)			(P/N 515 174 700)	Connect to ECM

MX Z™ SPORT 550F (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	730 (P/N 417 223 558)		734 (P/N 417 223 678)			
Ramp quantity	6					
Engagement RPM ± 100	2600					
Maximum RPM ± 100	6800					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Brown (P/N 417 127 061)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	47°-44° (P/N 417 127 109)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	190	180	170	160	140	130	1
	PTO	200	190					1
Jet needle		6BFY46						2
MAG Needle position		3		2			—	
PTO Needle position		4		2				
Slide cut-away		2.5						2
Pilot jet		35		45		55		2
MAG mixture screw		1.25						—
PTO mixture screw		1		1.25				
Valve seat		1.2						2
Needle jet		P-8 (159)				P-6 (159)		2
Float level (± 1 mm)		23.9						—
Idle RPM (± 200)		1650						—
Idle throttle valve position (± 0.1 mm)		1.6		1.8	2	2.2	2.4	—

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
-40°C (-40°F)	MAG	200	190	180	170	150	140
	PTO	210	200				
-30°C (-22°F)	MAG	195	185	175	165	145	135
	PTO	205	195				
-20°C (-4°F)	MAG	190	180	170	160	140	130
	PTO	200	190				
-10°C (14°F)	MAG	185	175	165	155	135	125
	PTO	195	185				
0°C (32°F)	MAG	180	170	160	150	130	120
	PTO	190	180				
10°C (50°F)	MAG	175	165	155	145	125	115
	PTO	185	175				
20°C (68°F)	MAG	170	160	150	140	120	110
	PTO	180	170				

Additional Information

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Reverse connector		(P/N 515 174 800)			(P/N 515 174 700) Connect to ECM	

EXPEDITION® SPORT 550F / SKANDIC TUNDRA SPORT 550F / SKANDIC TUNDRA LT 550F (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	700 (P/N 417 223 457)		734 (P/N 417 223 678)			
Ramp quantity	6					
Engagement RPM ± 100	2600					
Maximum RPM ± 100	6800					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Brown (P/N 417 127 061)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	44° (P/N 417 127 011)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	190	180	170	160	140	130	1
	PTO	200	190					1
Jet needle		6BFY46						2
MAG needle position		3			2			—
PTO needle position		4			2			
Slide cut-away		2.5						2
Pilot jet		35			45		55	2
MAG mixture screw		1.25						—
PTO mixture screw		1			1.25			
Valve seat		1.2						2
Needle jet		P-8 (159)				P-6 (159)		2
Float level (± 1 mm)		23.9						—
Idle RPM (± 200)		1650						—
Idle throttle valve position (± 0.1 mm)		1.6		1.8	2	2.2	2.4	—

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
-40°C (-40°F)	MAG	200	190	180	170	150	140
	PTO	210	200				
-30°C (-22°F)	MAG	195	185	175	165	145	135
	PTO	205	195				
-20°C (-4°F)	MAG	190	180	170	160	140	130
	PTO	200	190				
-10°C (14°F)	MAG	185	175	165	155	135	125
	PTO	195	185				
0°C (32°F)	MAG	180	170	160	150	130	120
	PTO	190	180				
10°C (50°F)	MAG	175	165	155	145	125	115
	PTO	185	175				
20°C (68°F)	MAG	170	160	150	140	120	110
	PTO	180	170				

Additional Information

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Reverse connector		(P/N 515 174 800)		(P/N 515 174 700) Connect to ECM		

SKANDIC WT 550F (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	700 (P/N 417 223 457)		734 (P/N 417 223 678)			
Ramp quantity	6					
Engagement RPM \pm 100	2600					
Maximum RPM \pm 100	6800					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Pink 2 (P/N 417 127 236)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	6.4 kgf (14.1 lbf)					
Cam angle (degrees)	47° - 44° (P/N 417 127 148)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	190	180	170	160	150	140	1
	PTO							1
Jet needle		6BFY46						2
Needle position		2			1			—
Slide cut-away		2.0						2
Pilot jet		40						2
Mixture screw		2.5			2			—
Valve seat		1.2						2
Needle jet		P-8 (159)						2
Float level (± 1 mm)		23.9						—
Idle RPM (± 200)		1650						—
Idle throttle valve position (± 0.1 mm)		1.5	1.7	1.8	2	2.1	2.2	—

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
-40°C (-40°F)	MAG	210	200	190	180	170	160
	PTO						
-30°C (-22°F)	MAG	200	190	180	170	160	150
	PTO						
-20°C (-4°F)	MAG	190	180	170	160	150	140
	PTO						
-10°C (14°F)	MAG	180	170	160	150	140	130
	PTO						
0°C (32°F)	MAG	170	160	150	140	130	120
	PTO						
10°C (50°F)	MAG	160	150	140	130	120	110
	PTO						
20°C (68°F)	MAG	150	140	130	120	110	100
	PTO						

GRAND TOURING SPORT 600

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Purple (P/N 414 817 800)			Pink/Purple (P/N 414 754 200)		
Ramp	412 (P/N 417 222 515)					
Calibration Screw Position	3	4	5	4	5	6
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)			Short no thread 32 mm/9,9 g (P/N 417 004 309)		
Engagement RPM \pm 100	3400			3900		
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417 127 039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42° (P/N 417 127 012)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	390	370	350	330	300	280	1
	PTO							1
Jet needle		9CEY2-58						2
Needle position		2						—
Slide cut-away		2.0						2
Pilot jet		17.5						2
Mixture screw		1.5			2			—
Valve seat		1.5						2
Needle jet		P-0M						2
Float level (± 1 mm)		N/A						—
Idle RPM (± 200)		1600						—
Idle throttle valve position (± 0.1 mm)		1.5	1.6	1.7	1.8	1.9		—

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
-40°C (-40°F)	MAG	410	390	370	350	320	300
	PTO						
-30°C (-22°F)	MAG	400	380	360	340	310	290
	PTO						
-20°C (-4°F)	MAG	390	370	350	330	300	280
	PTO						
-10°C (14°F)	MAG	380	360	340	320	290	270
	PTO						
0°C (32°F)	MAG	370	350	330	310	280	260
	PTO						
10°C (50°F)	MAG	360	340	320	300	270	250
	PTO						
20°C (68°F)	MAG	350	330	310	290	260	240
	PTO						

MX Z SPORT 600

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Purple (P/N 414 817 900)			Pink/Purple (P/N 414 754 200)		
Ramp	412 (P/N 417 222 515)					
Calibration Screw Position	3	4	5	4	5	6
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)			Short no thread 32 mm/9,9 g (P/N 417 004 309)		
Engagement RPM \pm 100	3800			3900	4100	
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417 127 039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42° (P/N 417 127 012)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	390	370	350	330	300	280	1
	PTO							1
Jet needle		9CEY2-58						2
Needle position		2						—
Slide cut-away		2.0						2
Pilot jet		17.5						2
Mixture screw		1.5			2			—
Valve seat		1.5						2
Needle jet		P-0M						2
Float level (± 1 mm)		N/A						—
Idle RPM (± 200)		1600						—
Idle throttle valve position (± 0.1 mm)		1.5	1.6	1.7	1.8	1.9		—

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
-40°C (-40°F)	MAG	410	390	370	350	320	300
	PTO						
-30°C (-22°F)	MAG	400	380	360	340	310	290
	PTO						
-20°C (-4°F)	MAG	390	370	350	330	300	280
	PTO						
-10°C (14°F)	MAG	380	360	340	320	290	270
	PTO						
0°C (32°F)	MAG	370	350	330	310	280	260
	PTO						
10°C (50°F)	MAG	360	340	320	300	270	250
	PTO						
20°C (68°F)	MAG	350	330	310	290	260	240
	PTO						

SUMMIT™ SPORT 146" 600

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Pink (P/N 414 916 300)			Green/Pink (P/N 414 756 900)		
Ramp	417 (P/N 417 222 552)					
Calibration Screw Position	3	4	2	3	4	5
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)		Short threaded 32 mm/10,88 g (P/N 417 222 477) 1 x set screw 20 mm (P/N 206 262 099)		Short threaded 32 mm/10,88 g (P/N 417 222 477)	
Engagement RPM \pm 100	3400			4100		
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417 127 039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	43° - 47° (P/N 417 127 133)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	390	370	350	330	300	280	1
	PTO							1
Jet needle		9CEY2-58						2
Needle position		2						—
Slide cut-away		2.0						2
Pilot jet		17.5						2
Mixture screw		1.5			2			—
Valve seat		1.5						2
Needle jet		P-0M						2
Float level (± 1 mm)		N/A						—
Idle RPM (± 200)		1600						—
Idle throttle valve position (± 0.1 mm)		1.5	1.6	1.7	1.8	1.9		—

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
-40°C (-40°F)	MAG	410	390	370	350	320	300
	PTO						
-30°C (-22°F)	MAG	400	380	360	340	310	290
	PTO						
-20°C (-4°F)	MAG	390	370	350	330	300	280
	PTO						
-10°C (14°F)	MAG	380	360	340	320	290	270
	PTO						
0°C (32°F)	MAG	370	350	330	310	280	260
	PTO						
10°C (50°F)	MAG	360	340	320	300	270	250
	PTO						
20°C (68°F)	MAG	350	330	310	290	260	240
	PTO						

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

EXPEDITION LE 600 H.O. E-TEC® (ALL) / EXPEDITION SE 600 H.O. E-TEC (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Red (P/N 414 993 000)					
Ramp	600 (P/N 417 222 444)					
Calibration Screw Position	2	3	4	2	3	4
Pin	Long solid 35.75 mm/18,8 g (P/N 417 222 594)			Short threaded 32 mm/10,88 g (P/N 417 222 477) 1 X set screw 16 mm (P/N 206 261 699)		
Engagement RPM ± 100	3000					
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	White 2 (P/N 417 127 243)					
Spring tension Kg ± 0.7 (lb ± 1.5)	6.8 kgf (15 lbf)					
Cam angle (degrees)	40° (P/N 417 127 205)					

SKANDIC WT 600 H.O. E-TEC (ALL) / SKANDIC SWT 600 H.O. E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Red (P/N 414 993 000)					
Ramp	600 (P/N 417 222 444)					
Calibration Screw Position	2	3	4	2	3	4
Pin	Long solid 35.75 mm/18,8 g (P/N 417 222 594)			Short threaded 32 mm/10,88 g (P/N 417 222 477)		
Engagement RPM \pm 100	3000					
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	White 2 (P/N 417 127 243)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	6.8 kgf (15 lbf)					
Cam angle (degrees)	41° - 45° (P/N 417 127 105)					

GSX™ LE 600 H.O. E-TEC®

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Green (P/N 414 742 100)			Blue/Yellow (P/N 414 689 500)		
Ramp	412 (P/N 417 222 515)					
Calibration Screw Position	3	4	5	2	3	4
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)			Short no thread 32 mm/10.88 g (P/N 417 222 477)		
Engagement RPM \pm 100	3400			3800		
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	48° (P/N 417 127 083)			40° (P/N 417 126 956)		

GRAND TOURING LE 600 H.O. E-TEC (ALL) / GSX™ SE 600 H.O. E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Green (P/N 414 689 200)			Blue/Yellow (P/N 414 689 500)		
Ramp	414 (P/N 417 222 546)					
Calibration Screw Position	3	4	5	3	4	5
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)			Short no thread 32 mm/9,9 g (P/N 417 004 309)		
Engagement RPM ± 100	3400			3600		
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	48° (P/N 417 127 083)			42° - 40° (P/N 417 127 106)		

**MX Z TNT 600 H.O. E-TEC (ALL) /
 MX Z™ X™ 600 H.O. E-TEC (ALL) /
 MX Z X-RS™ 600 H.O. E-TEC (ALL) /
 RENEGADE ADRENALINE 600 H.O. E-TEC (ALL) /
 RENEGADE™ BACKCOUNTRY™ 600 H.O. E-TEC /
 RENEGADE BACKCOUNTRY X 600 H.O. E-TEC (ALL) /
 RENEGADE X 600 H.O. E-TEC**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Green (P/N 414 817 700)			Purple/Yellow (P/N 415 015 300)		
Ramp	412 (P/N 417 222 515)					
Calibration Screw Position	3	4	5	2	3	4
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)			Short threaded 32 mm/10.88 g (P/N 417 222 477)		
Engagement RPM ± 100	3400			3800		
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	48° (P/N 417 127 083)			40° (P/N 417 126 956)		

SKANDIC TUNDRA Xtreme 600 H.O. E-TEC (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Orange (P/N 415 015 200)					
Ramp	417 (P/N 417 222 552)					
Calibration Screw Position	3	4	5	3	4	5
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308) 1 X set screw 16 mm (P/N 206 261 699)			Short threaded 32 mm/10,88 g (P/N 417 222 477)		
Engagement RPM \pm 100	2800					
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417 127 039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44° - 42° (P/N 417 126 973)			41° - 45° (P/N 417 127 105)		

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap	3					
Rear suspension extension	Locked			Free		

SKANDIC TUNDRA Xtreme 600 H.O. E-TEC (EUROPE)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Green (P/N 414 817 700)			Red/Orange (P/N 415 015 200)		
Ramp	412 (P/N 417 222 515)			417 (P/N 417 222 552)		
Calibration Screw Position	3	4	5	3	4	5
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)			Short threaded 32 mm/10,88 g (P/N 417 222 477)		
Engagement RPM \pm 100	2800					
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417 127 039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	41° - 45° (P/N 417 127 105)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap	3					
Rear suspension extension	Locked			Free		

SUMMIT SP™ 146" AND 154" 600 H.O. E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Green (P/N 414 817 700)		Purple/Green (P/N 415 015 400)			
Ramp	412 (P/N 417 222 515)		440 (P/N 417 223 096)			
Calibration Screw Position	3	4	3	3	4	5
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)		Short threaded 32 mm/10,88 g (P/N 417 222 477) 1 x set screw/16 mm (P/N 206 261 699)	Short threaded 32 mm/10,88 g (P/N 417 222 477)		
Engagement RPM ± 100	4000					
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417 127 039)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	41° - 45° (P/N 417 127 105)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

SUMMIT SP 146" 600 H.O. E-TEC (EUROPE)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Green (P/N 414 817 700)		Purple/Green (P/N 415 015 400)			
Ramp	412 (P/N 417 222 515)		440 (P/N 417 223 096)			
Calibration Screw Position	3	4	2	3	4	5
Pin	Short solid 32 mm/16,75 g (P/N 417 004 308)		Short threaded 32 mm/10,88 g (P/N 417 222 477)			
Engagement RPM \pm 100	4000					
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417 127 039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	41° - 45° (P/N 417 127 105)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

SUMMIT SPORT 154" 800R POWER TEK

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Purple (P/N 414 817 800)		Green/Purple (P/N 414 762 800)			
Ramp	413 (P/N 417 222 508)		441 (P/N 417 223 098)			
Calibration Screw Position	3	4	1	2	3	4
Pin	Long solid 35,75 mm/18,8 g (P/N 417 222 594)		Long threaded 35,75 mm/12,4 g (P/N 417 222 595) 1 set screw/12 mm (P/N 206 261 299)		Short threaded 32 mm/10,88 g (P/N 417 222 477)	
Engagement RPM \pm 100	3800					
Maximum RPM \pm 100	8150					

Sea Level Calibration Kit

MODEL	PART NUMBER
SUMMIT SPORT 154" 800R Power TEK	860 200 394

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple (P/N 417 127 062)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	43° - 47° (P/N 417 127 133)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	480						1
	PTO	480						1
Jet needle		9EGI04-58						2
Needle position		N/A						—
Slide cut-away		2.0						2
Pilot jet		17,5						2
Mixture screw		1.5						—
Valve seat		1.5						2
Needle jet		P-0M						2
Float level (± 1 mm)		N/A						—
Idle RPM (± 200)		1900						—
Idle throttle valve position (± 0.1 mm)		1.6		1.8		2	—	

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)						
-40°C (-40°F)	MAG	520 N											
	PTO	520 N											
-30°C (-22°F)	MAG	500											
	PTO	500											
-20°C (-4°F)	MAG												
	PTO												
-10°C (14°F)	MAG												
	PTO												
0°C (32°F)	MAG							480					
	PTO							480					
10°C (50°F)	MAG							480					
	PTO							480					
20°C (68°F)	MAG							480					
	PTO							480					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

SUMMIT SPORT 154" 800R POWER TEK (EUROPE)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Purple (P/N 414 817 800)		Green/Purple (P/N 414 762 800)			
Ramp	413 (P/N 417 222 508)		441 (P/N 417 223 098)			
Calibration Screw Position	3	4	3	4		5
Pin	Long solid 35,75 mm/18,8 g (P/N 417 222 594)		Long threaded 35,75 mm/12,4 g (P/N 417 222 595) 1 set screw/12 mm (P/N 206 261 299)		Short threaded 32 mm/10,88 g (P/N 417 222 477)	
Engagement RPM \pm 100	3800					
Maximum RPM \pm 100	8150					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple (P/N 417 127 062)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	43° - 47° (P/N 417 127 133)					

Carburation

NOTICE These adjustments are guidelines only. Specific adjustments vary with temperature, altitude and snow condition. Always observe spark plug condition for proper jetting.

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Main jet	MAG	480						1
	PTO	480						1
Jet needle		9EGI04-58						2
Needle position		N/A						—
Slide cut-away		2.0						2
Pilot jet		17,5						2
Mixture screw		1.5						—
Valve seat		1.5						2
Needle jet		P-0M						2
Float level (± 1 mm)		N/A						—
Idle RPM (± 200)		1900						—
Idle throttle valve position (± 0.1 mm)		1.6		1.8		2	—	

Main Jet Chart

		SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)						
-40°C (-40°F)	MAG	520 N											
	PTO	520 N											
-30°C (-22°F)	MAG	500											
	PTO	500											
-20°C (-4°F)	MAG												
	PTO												
-10°C (14°F)	MAG												
	PTO												
0°C (32°F)	MAG							480					
	PTO							480					
10°C (50°F)	MAG							480					
	PTO							480					
20°C (68°F)	MAG							480					
	PTO							480					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

FREERIDE™ 137" 800R E-TEC (ALL, Track with profile of 44.5 mm (1-3/4 in))

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 415 034 900)		Purple/Pink (P/N 414 949 500)			
Ramp	413 (P/N 417 222 508)		441 (P/N 417 223 098)			
Calibration Screw Position	3	4	3	4	5	6
Pin	Long solid 35.75 mm/18,8 g (P/N 417 222 594)		Long threaded 35,75 mm/12,4 g (P/N 417 222 595) 1 set screw/12 mm (P/N 206 261 299)			
Engagement RPM \pm 100	3800		3900	4000		4100
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)		Blue (P/N 417 127 118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44° - 42° (P/N 417 126 973)		40° (P/N 417 126 956)			

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

FREERIDE™ 137" 800R E-TEC (ALL, Track with profile of 57 mm (2-1/4 in))

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 415 034 900)		Purple/Pink (P/N 414 949 500)			
Ramp	413 (P/N 417 222 508)		441 (P/N 417 223 098)			
Calibration Screw Position	3	4	3	4	5	6
Pin	Long solid 35.75 mm/18,8 g (P/N 417 222 594)		Long threaded 35,75 mm/12,4 g (P/N 417 222 595) 1 set screw/12 mm (P/N 206 261 299)			
Engagement RPM ± 100	3800		3900	4000		4100
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue (P/N 417 127 118)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° (P/N 417 126 956)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

FREERIDE 146" AND 154" 800R E-TEC (EUROPE) / SUMMIT X 146", 154" AND 163" 800R E-TEC (EUROPE)

► Drive Pulley ◀

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Green 414 742 100		Purple/Pink (P/N 414 949 500)			
Ramp	413 (P/N 417 222 508)		441 (P/N 417 223 098)			
Calibration Screw Position	2	3	2	3	4	5
Pin	Long solid 35,75 mm/18,8 g (P/N 417 222 594)		Long threaded 35,75 mm/12,4 g (P/N 417 222 595) ► 1 set screw/16 mm (P/N 206 261 699) ◀		Long threaded 35,75 mm/12,4 g (P/N 417 222 595)	
Engagement RPM ± 100	3800					
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue (P/N 417 127 118)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° (P/N 417 126 956)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

146" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		21 (P/N 504 096 200)		19 (P/N 504 152 030)		
Lower gear		49 (P/N 504 152 581)		49 (P/N 504 152 581)		
Chain		106 (P/N 504 152 630)		104 (P/N 504 152 629)		

154" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		21 (P/N 504 096 200)			19 (P/N 504 152 030)	
Lower gear		49 (P/N 504 152 581)			49 (P/N 504 152 581)	
Chain		106 (P/N 504 152 630)			104 (P/N 504 152 629)	

163" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear					19 (P/N 504 152 030)	
Lower gear					51 (P/N 504 152 971)	
Chain					106 (P/N 504 152 630)	

**► FREERIDE 146" AND 154" 800R E-TEC /
 FREERIDE 154" 800R E-TEC (RACING,
 Track with profile of 57 mm (2-1/4 in))
 SUMMIT SP 146", 154" AND 163" 800R E-TEC
 SUMMIT X 146", 154" AND 163" 800R E-TEC◀**

► Drive Pulley◀

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/green (P/N 414 742 100)		Purple/Pink (P/N 414 949 500)			
Ramp	413 (P/N 417 222 508)		441 (P/N 417 223 098)			
Calibration Screw Position	3	4	1	2	3	4
Pin	Long solid 35.75 mm/18,8 g (P/N 417 222 594)		Long threaded 35,75 mm/12,4 g (P/N 417 222 595) ► 1 set screw/16 mm (P/N 206 261 699)◀		Long threaded 35,75 mm/12,4 g (P/N 417 222 595)	
Engagement RPM ± 100	3800					
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue (P/N 417 127 118)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° (P/N 417 126 956)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

146" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		23 (P/N 504 091 000)		21 (P/N 504 096 200)		
Lower gear		49 (P/N 504 152 581)		49 (P/N 504 152 581)		
Chain		106 (P/N 504 152 630)		106 (P/N 504 152 630)		

154" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear		23 (P/N 504 091 000)		19 (P/N 504 152 030)		
Lower gear		49 (P/N 504 152 581)		49 (P/N 504 152 581)		
Chain		106 (P/N 504 152 630)		104 (P/N 504 152 629)		

154" RACING (track profile of 57 mm (2-1/4 in))						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		23 (P/N 504 091 000)		21 (P/N 504 096 200)		
Lower gear		49 (P/N 504 152 581)		49 (P/N 504 152 581)		
Chain		106 (P/N 504 152 630)		106 (P/N 504 152 630)		

163" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		23 (P/N 504 091 000)		19 (P/N 504 152 030)		
Lower gear		51 (P/N 504 152 971)		51 (P/N 504 152 971)		
Chain		108 (P/N 504 152 631)		106 (P/N 504 152 630)		

Sea Level Calibration Kit

MODEL	PART NUMBER
146" and 154" Racing	860 201 007
154"	860 201 008
163"	860 201 009

GSX SE 800R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Green (P/N 414 742 100)		Yellow/Blue (P/N 414 818 000)			
Ramp	414 (P/N 417 222 546)					
Calibration Screw Position	3	4	2	3	4	5
Pin	Long solid 35.75 mm/18,8 g (P/N 417 222 594)		Long threaded 35,75 mm/12,4 g (P/N 417 222 595) 1 set screw/12 mm (P/N 206 261 299)			
Engagement RPM \pm 100	3800					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)		Purple (P/N 417 127 062)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	50°-44° (P/N 417 127 111)					

MX Z TNT 800R E-TEC / MX Z X 800R E-TEC / MX Z X-RS 800R E-TEC (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Green (P/N 414 817 700)		Purple/Yellow (P/N 415 015 300)			
Ramp	414 (P/N 417 222 546)					
Calibration Screw Position	3	4	2	3	4	5
Pin	Long solid 35.75 mm/18.8 g (P/N 417 222 594)		Long threaded 35.75 mm/12.4 g (P/N 417 222 595) 1 x set screw 12 mm (P/N 206 261 299)			
Engagement RPM \pm 100	3800					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)		Purple (P/N 417 127 062)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 44° (P/N 417 127 109)		44° (P/N 417 127 011)			

RENEGADE ADRENALINE 800R E-TEC / RENEGADE X 800R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 415 034 900)		Purple/Pink (P/N 414 949 500)			
Ramp	414 (P/N 417 222 546)		441 (P/N 417 223 098)			
Calibration Screw Position	3	4	2	3	4	5
Pin	Long solid 35.75 mm/18.8 g (P/N 417 222 594)		Long threaded 35.75 mm/12.4 g (P/N 417 222 595) 1 set screw/12 mm (P/N 206 261 299)			
Engagement RPM \pm 100	3800		3900	4000		4100
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44° - 42° (P/N 417 126 973)					

RENEGADE BACKCOUNTRY 800R E-TEC / RENEGADE BACKCOUNTRY X 800R E-TEC (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 415 034 900)		Purple/Pink (P/N 414 949 500)			
Ramp	413 (P/N 417 222 508)		441 (P/N 417 223 098)			
Calibration Screw Position	3	4	3	4	5	6
Pin	Long solid 35.75 mm/18.8 g (P/N 417 222 594)		Long threaded 35.75 mm/12.4 g (P/N 417 222 595) 1 set screw/12 mm (P/N 206 261 299)			
Engagement RPM \pm 100	3800		3900	4000		4100
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417 127 137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44° - 42° (P/N 417 126 973)					

EXPEDITION SPORT 600 ACE™ / RENEGADE™ SPORT 600 ACE (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	716 (P/N 417 223 450)		725 (P/N 417 223 601)			
Ramp quantity	6					
Engagement RPM ± 100	2200					
Maximum RPM ± 100	7250					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Pink 3 (P/N 417 127 344)					
Spring tension Kg ± 0.7 (lb ± 1.5)	6.4 kgf (14.1 lbf)					
Cam angle (degrees)	41°-45° (P/N 417 127 235)					

SKANDIC TUNDRA SPORT 600 ACE / SKANDIC TUNDRA LT 600 ACE (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/White (P/N 417 223 747)	Red/Red (P/N 417 223 745)	Red/Yellow (P/N 417 223 748)	Red/White (P/N 417 223 747)		Red/Red (P/N 417 223 745)
Ramp	738 (P/N 417 223 802)			725 (P/N 417 223 601)		
Ramp quantity	6					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7250					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Pink 3 (P/N 417 127 344)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	6.4 kgf (14.1 lbf)					
Cam angle (degrees)	41°-45° (P/N 417 127 235)					

GRAND TOURING SPORT 600 ACE (ALL) / MX Z SPORT 600 ACE (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Yellow (P/N 417 223 315)	Red/Red (P/N 417 223 186)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	712 (P/N 417 223 448)		725 (P/N 417 223 601)			
Ramp quantity	6					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7250					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Pink 3 (P/N 417 127 344)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	6.4 kgf (14.1 lbf)					
Cam angle (degrees)	41°-45° (P/N 417 127 235)					

GRAND TOURING SPORT 600 ACE (EUROPE)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	715 (P/N 417 223 452)		725 (P/N 417 223 601)			
Ramp quantity	6					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7250					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Pink 3 (P/N 417 127 344)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	6.4 kgf (14.1 lbf)					
Cam angle (degrees)	41°-45° (P/N 417 127 235)					

SKANDIC WT 600 ACE (ALL) / SKANDIC SWT 600 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/White (P/N 417 223 314)	Red/Red (P/N 417 223 186)	Red/Yellow (P/N 417 223 315)	Red/Orange (P/N 417 223 316)
Ramp	716 (P/N 417 223 450)		725 (P/N 417 223 601)			
Ramp quantity	6					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7250					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Pink 3 (P/N 417 127 344)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	6.4 kgf (14.1 lbf)					
Cam angle (degrees)	37°-45° (P/N 417 127 240)					

EXPEDITION LE 1200 4-TEC® (ALL) / EXPEDITION SE 1200 4-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Yellow/Orange (P/N 417 223 746)	Red/White (P/N 417 223 747)	Yellow/Red (P/N 417 223 751)		Yellow/Orange (P/N 417 223 746)
Ramp		735 (P/N 417 223 679)		739 (P/N 417 223 828)		
Engagement RPM ± 100	2200					
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Pink 2 (P/N 417 127 236)				
Spring tension Kg ± 0.7 (lb ± 1.5)		8 kgf (17.6 lbf)				
Cam angle (degrees)		44° - 40° (P/N 417 127 206)				

GSX LE 1200 4-TEC
GSX SE 1200 4-TEC
GRAND TOURING LE 1200 4-TEC /
GRAND TOURING SE 1200 4-TEC (ALL)
MX Z TNT 1200 4-TEC /
MX Z X 1200 4-TEC
RENEGADE ADRENALINE 1200 4-TEC /
RENEGADE X 1200 4-TEC (ALL)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Orange (P/N 417 223 746)		Red/White (P/N 417 223 747)	Yellow/Red (P/N 417 223 751)		Yellow/Orange (P/N 417 223 746)
Ramp	735 (P/N 417 223 679)		739 (P/N 417 223 828)			
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Pink 3 (P/N 417 127 344)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	8 kgf (17.6 lbf)					
Cam angle (degrees)	47° - 40° (P/N 417 127 190)					