

Rigging



Rigging



Whoopie Sling

The Whoopie Sling is an adjustable lifting sling with a permanent eye at one end and an adjustable eye at the other that allows it to easily adapt to a variety of tasks and loads. The adjustment allows snug lifting control and minimizes the number of fixed length slings required. The sling is a braided non-torquing polyester rope with Samthane coating. This coating provides increased sling durability. Each sling has a permanent rating tag attached.

Sling Material	Product No.	Diameter.	Length	Eye Size	Permanent Single Leg	Choker Capacity	Basket Capacity
Tenex	B1ABW462	1/2"	2.5' - 4'	5"	2220 lbs.	1760 lbs.	4400 lbs.
	B1ABW562	5/8"	3' - 5'	6"	3200 lbs.	2560 lbs.	6400 lbs.
	B1ABW662	3/4"	3.5' - 6'	7"	4200 lbs.	3380 lbs.	8400 lbs.
	B1AB1062	3/4"	6.5' - 10'	7"	4200 lbs.	3380 lbs.	8400 lbs.
	B1AB1262	3/4"	3.5' - 12'	7"	4200 lbs.	3380 lbs.	8400 lbs.
	B1AB1462	3/4"	3.5' - 14'	7"	4200 lbs.	3380 lbs.	8400 lbs.



B1T5810SL



B1SB5810SL

Fixed Eye Sling

TreeRig slings are everything that you expect from Samson: strong and tough. The Tenex version is designed for strength and better conformity to any surface while the Stable Braid is low-stretch and abrasion resistant, while still maintaining high strength.

Sling Material	Product No.	Dia.	Len.	Eye Size	Choker Capacity
Tenex	B1T5810SL	5/8"	10'	6"	3800 lbs.
	B1T3412SL	3/4"	12'	6"	5000 lbs.
Stable Braid	B1SB5810SL	5/8"	10'	6"	3300 lbs.
	B1SB3414SL	3/4"	14'	6"	4100 lbs.

Fixed Eye Sling



Double-braid/composite construction of polyester cover over nylon core results in higher tensile strength and better shock load performance. These slings are urethane coated for abrasion resistance and have a Cordura® sleeve spliced into the eye for added sling life.




Sling Material	Product No.	Dia.	Len.	Eye Size	Choker Capacity
Double Braid	B1AB120	5/8"	10'	8"	2900 lbs.
	B1AB140	5/8"	12'	8"	2900 lbs.
	B1AB160	5/8"	14'	8"	4880 lbs.
	B1AB205	3/4"	16'	8"	4880 lbs.

Eye and Eye Sling

This eye and eye web sling is great for all types of rigging work. They are compact, lightweight, and strong. Each sling comes with its own tag indicating the safe Working Load Limit.



Sling Material	Product No.	Dia.	Len.	Eye Size	Permanent Single Leg	Choker Capacity	Basket Capacity
Nylon Webbing	B1ABSL30	1"	30"	3"	1200 lbs.	960 lbs.	2400 lbs.
	B1ABSL40	1"	40"	3"	1200 lbs.	960 lbs.	2400 lbs.
	B1ABSL62	1"	62"	3"	1200 lbs.	960 lbs.	2400 lbs.



Petzl Connexion Fixe

This device can be used as either an anchor strap or a sling for lifting heavy loads. Made of high-strength webbing, that is resistant to abrasion. It is 1-3/4" wide and has a forged steel D-rings at each end for 4946 lbs. of strength.


Sling Material	Product No.	Width	Len.	Permanent Single Leg	Basket Capacity
Nylon Webbing	B1ABC42100	1-3/4"	40"	4946 lbs.	7868 lbs.
	B1ABC42150	1-3/4"	60"	4946 lbs.	7868 lbs.
	B1ABC42200	1-3/4"	80"	4946 lbs.	7868 lbs.



Cmi

CMI Sewn Runner

CMI doesn't make any wild claims about their sewn runners. They simply use the best material and have incredibly strong bar-tacks. All that matters is that your bar-tacks are stronger than your webbing and CMI's are strong enough to withstand up to an amazing 6000 lbs. All runners are 1" wide.

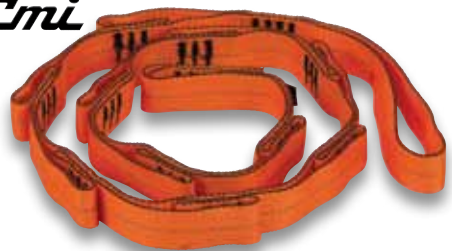

Sling Material	Product No.	Width	Len.	Permanent Single Leg
Nylon Webbing	B1ABAAS26	1"	26"	6000 lbs.
	B1ABAAS30	1"	30"	6000 lbs.
	B1ABAAS36	1"	36"	6000 lbs.
	B1ABAAS40	1"	40"	6000 lbs.
	B1ABAAS42	1"	42"	6000 lbs.
	B1ABAAS48	1"	48"	6000 lbs.

CMI Daisy Chain

CMI's daisy chain can be used to haul numerous items into the canopy. End-to-end strength is an incredible 6000 lbs. while individual loops are rated to 3700 lbs.

Material	Product No.	Width	Len.	Permanent Single Leg
Nylon Webbing	B1ABDC001	1"	48"	6000 lbs.



False Crotch Block and Sling

This combination comes with a 16' x 3/4" double-braided rigging sling with Cordura® collar and steel block for 4,880 lbs. of rigging capability.

Material	Product No.	Dia.	Len.	Eye Size
Double Braid	B1AB125	3/4"	16'	8"



Rigging

B1ABRP130

B1ABRP131



CMI Rigging Block

These stainless steel blocks were designed by CMI specifically for use in false crotch systems to help save wear and tear on bull ropes. The upper bushing maximizes sling strength and wide side-plates protect the rope from contact with rough bark. Convenient milled knobs allow for easy rigging of the upper bushing. Fabricated from stainless steel and aluminum for lasting durability in outdoor conditions.

Material	Product No.	Dia.	Tensile	WLL	Weight
Stainless	B1ABRP130	5/8"	28,000 lbs.	2800 lbs.	2.3 lbs.
	B1ABRP131	3/4"	40,000 lbs.	4000 lbs.	5.6 lbs.



ISC Rigging Block

These rigging blocks from ISC combine the convenience of a spring loaded upper pin with a captive bushing, and a lightweight aluminum design. Simply push and twist the upper pin, and the cheekplates will swing open. Best of all, the bushing and pin can not fall out of the block. The sheave and bushing pins are stainless steel.

Material	Product No.	Dia.	Tensile	WLL	Weight
Aluminum	B1AB5007S	5/8"	22,000 lbs.	2200 lbs.	3.5 lbs.
	B1AB5007L	3/4"	33,000 lbs.	3300 lbs.	5.1 lbs.



Buckingham Port-A-Wrap

The Port-A-Wrap is the strongest, easiest friction lowering device on the market. Commonly used with one of our Whoopie slings, this device can lower even the heaviest of trees safely and easily to the ground. The wide diameter of the centerpiece creates more surface area for your rope creating even more friction with fewer wraps. In addition, this design decreases the bend in your line increasing the lifespan of your line. The Port-A-Wrap is heavy-duty steel and comes in two sizes accommodating rope up to 3/4" in diameter. Safe working load of up to 2000 lbs.

Material	Product No.	Dia.	Tensile	WLL
Steel	B1AB6011	5/8"	12,000 lbs.	2000 lbs.
	B1AB601L	3/4"	18,000 lbs.	2000 lbs.

Rescue 8

This rescue 8 has a tensile strength of over 11,000 lbs. and is perfect for light-duty rigging and other use in the canopy. It is easier to install and much lighter than the Port-A-Wrap.



Material	Product No.	Tensile
Stainless	B1AB462	11,000 lbs.

Maasdam Pow'r-Pull®

With more than 50 years of experience making pullers, Maasdam produces one of the best there is. This puller has a 1500 pound capacity, aluminum alloy ratchet wheel, drop forged steel hook, and high-strength electro-plated steel parts. The "Notch-at-a-time" let down system ensures safety. This puller uses a 1/2" 3-strand twisted rope. Rope not included.



Material	Product No.	WLL
--	B1ABAO	1750 lbs.