


T770 Compact Track Loader

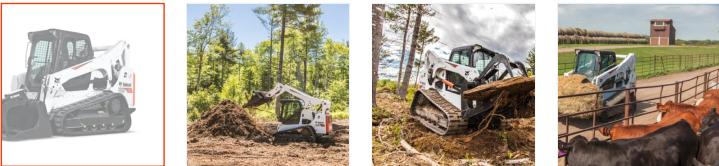

With 11 feet of vertical lift, the Bobcat® T770 compact track loader is primed for loading trucks, grinders and hoppers as well as many other jobs.

- Powerful breakout forces
- Durable undercarriage
- Superior lift arms
- Maximum headroom and legroom
- Unmatched machine versatility

[Build & Quote](#)

[Contact Dealer](#)

[View Offers](#)

[Find Dealer](#)

[Download Brochure](#)

T770 Overview

- The Bobcat® T770 compact track loader delivers industry-leading breakout forces and rated operating capacity. The 92-hp Bobcat® engine meets Tier 4 standards without a Diesel Particulate Filter (DPF), which reduces time otherwise lost to DPF regeneration and long-term maintenance costs.
- The optional Automatic Ride Control is easily activated from the cab to cushion the bucket for less spillage and greater operator comfort.
- Engineered to protect your uptime, the T770 features cold weather protection to prevent premature component wear, Smart Cooling for efficient operations in harsh working conditions, battery run-down protection, electronic protection, protected hoses and quick couplers and more.

T770 Specifications

T770 Key Specifications	
Rated Operating Capacity (ISO)	3,475 lb
Operating Weight	10515 lb
Ground Pressure (Rubber)	4.2 psi
Auxiliary Std Flow	23 gal/min
Auxiliary High Flow	36.6 gal/min
Joystick Control	Optional

Engine	
Emissions Tier (EPA)	Tier 4
Engine Cooling	Liquid
Engine Fuel	Diesel
Horsepower	92 hp
Turbocharged Engine	yes

Performance	
Rated Operating Capacity (ISO)	3,475 lb
Operating Capacity (50% of Tip)	4960 lb
Tipping Load	9929 lb
Operating Weight	10515 lb
Travel Speed	6.6 mph
Travel Speed (2-speed option)	10.7 mph
Ground Pressure (Rubber)	4.2 psi

Capacities	
Fuel Tank	43.8 gal

Hydraulic System	
System Relief @ Quick Couplers	3,500 psi
Auxiliary Std Flow	23 gal/min
Auxiliary High Flow	36.6 gal/min

Dimension	
Length	141.6 in
Length without Attachment	114.3 in
Length with Standard Bucket	141.6 in
Width	78 in
Width (with bucket)	80 in
Height	81.3 in
Height with Operator Cab	81.3 in
Height to Bucket Hinge Pin	131.4 in
Reach @ Maximum Height	35.2 in
Turning Radius	88 in
Length of track on ground	63.7 in
Track Width	17.7 in

Features	
Joystick Control	Optional
Air Conditioning	Optional
Backup Alarm	Standard
BICS System (Interlock)	Standard
Cab Heater	Optional
Operating Lights	Standard
Suspension Seat	Standard
Two Speed Travel	Optional
Deluxe Instrumentation	Optional
Engine Shutdown	Standard
Hydraulic Bucket Positioning	Optional
High Flow Option	Optional
Auxiliary Hydraulics	Standard
Bob-Tach Attachment System	Standard
Power Bob-Tach	Optional
ACS (Switchable Controls)	Optional
Ride Control	Optional
Horn	Standard
Cab Enclosure	Optional
Adjustable Seat	Standard
Sound Option	Optional
Rear Window	Standard
Top Window	Standard
Seat Belt	Standard
Spark Arrestor Muffler	Standard