
BUILT
DIFFERENT
Cub Cadet
PRO SERIES







It's easy to stick with what you know.

But real progress starts with doing something different.

Different isn't afraid to stand out.

Different doesn't back down from an uphill battle.

Different pushes the limits of what's possible.

Different is the beating heart of innovation.

The Pro Series™ by Cub Cadet®.

BUILT DIFFERENT

cubcadet.ca/pro

Cub Cadet®









CONTENTS

PRO Z™ SERIES	6-17
PRO X™ SERIES	18-21
ACCESSORIES	22-23
SPECIFICATIONS	24-27


Cub Cadet

PRO Z™ SERIES

Your difference maker.

It takes a different kind of person to do what you do. And a different kind of machine. The PRO Z™ Series was built for exactly that. Maintenance-free spindles and EFI engine options amp up your productivity, with a fully welded frame and commercial-grade deck that are engineered to stand up to tough demands for years to come.

The PRO Z™ Series offers an innovative steering system engineered to tackle challenging terrain with up to a 20-degree incline. Add it to your crew and see the PRO Z™ difference for yourself.



What makes the PRO Z™ Series?

CATEGORY-EXCLUSIVE STEERING SYSTEMS
EPS STEERING WHEEL & LAP BAR

COMMERCIAL-GRADE STRENGTH
7-GAUGE STEEL DECK

EASY AND QUICK DECK ADJUSTMENTS
ELECTRO-HYDRAULIC LIFT SYSTEM†

HILLSIDE STABILITY
REAR DUAL-WHEEL TRACTION*

PRISTINE PASSES
MARBAIN® BLADES**

† Standard on the PRO Z™ 972 SD and PRO Z™ 972 SDL. Available as an attachment, sold separately.
* Available on the PRO Z 972 SD DUALLY EFI and PRO Z 972 SDL EFI only
** Marbain® is a trademark of Fisher-Barton Inc.



PRO Z 972 SD



PRO Z™ 700

HORSEPOWER:
27 - 31 hp**

ENGINE DISPLACEMENT:
852cc - 999cc

DECK SIZES:
54", 60" and 72"

REAR TIRES:
24" x 12" - 12"

WARRANTY:
3-Year Limited / No Hour Limit Warranty* and/or
5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*



PRO Z™ 900

HORSEPOWER:
38.5 hp**

ENGINE DISPLACEMENT:
999cc

DECK SIZES:
60" and 72"

REAR TIRES:
Up to 26" x 12" - 12"

WARRANTY:
3-Year Limited / No Hour Limit Warranty* and/or
5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*

PRO Z™ ATTACHMENTS

Attachments Sold Separately



PCS 1900 power collection system

19" diameter impeller housing and
a 12-bushel, three-bag collection system.



Mulch kit

Mulching your lawn clippings allows for quick decomposition and returns essential nutrients back to the yard.

* For warranty details and exclusions, please visit cubcadet.ca or visit your local dealer.
** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.

PRO Z™ DUAL-WHEEL SERIES

Hillside stability solved.

You never back down from a challenge. That's why the PRO Z™ SD and SDL are dual-wheel commercial zero-turns specifically engineered to tackle challenging terrain with up to a 25-degree slope. And with up to 30 degrees of self-leveling air-ride seat comfort (available only on the SDL), these mowers are built to tackle properties with diverse terrain.



DUAL REAR WHEELS

Oversized dual rear wheels help provide stability, traction and precision on the PRO Z™ 972 SD and SDL.



PRO Z™ 972 SD DUALLY EFI

HORSEPOWER:
38.5 hp**

SEAT SWIVEL:
N/A

WARRANTY:
3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*




PRO Z™ 972 SDL EFI

HORSEPOWER:
38.5 hp**

SEAT SWIVEL:
Self-leveling air-ride seat

WARRANTY:
3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*

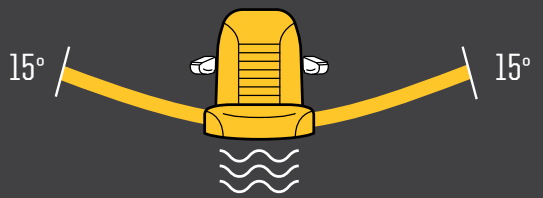


MAXIMIZED COMFORT

The self-leveling air-ride seat on the PRO Z™ 972 SDL lets you operate with up to 15 degrees of self-leveling from side to side.

HILLSIDE CONFIDENCE

Four-wheel steering control with power steering for hillside stability.

- A Up to a 25-degree slope
- B Category exclusive steering wheel control with power steering
- C Dual wheel traction control

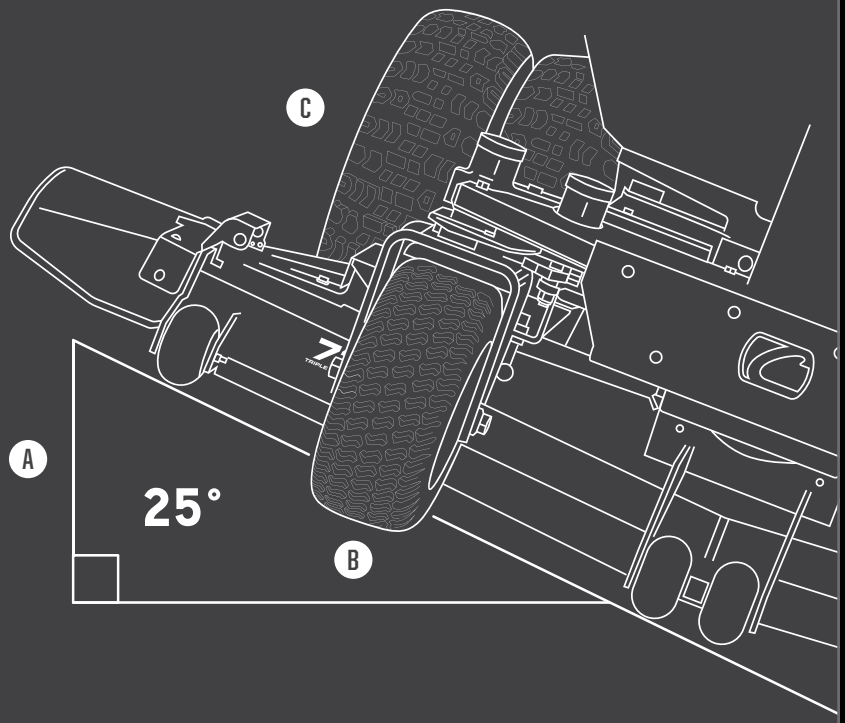

Deck size: 72"

* For warranty details and exclusions, please visit cubcadet.ca or visit your local dealer..
** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.

PRO Z™ COMFORT

A different level of comfort.

When days are as long as yours, comfort isn't just nice to have–it's necessary.
That's why we designed the PRO Z™ series to be a smooth ride. Innovative features like the isolation dampening system and air-ride suspension help absorb impacts of the job, while adjustable seat firmness, lumbar support and padded armrests provide additional comfort so you'll be able to go the distance.




PRO Z™ AIR-RIDE SEAT

Our air-ride seat allows riders to adjust seat firmness to their personal preference. Standard on the PRO Z™ 900.

- A Air-ride control
- B EVC cushion (elastic vibration control)
- C Isolation-dampening system
- D Angle-back adjustment
- E Adjustable padded armrests
- F Adjustable lumbar support



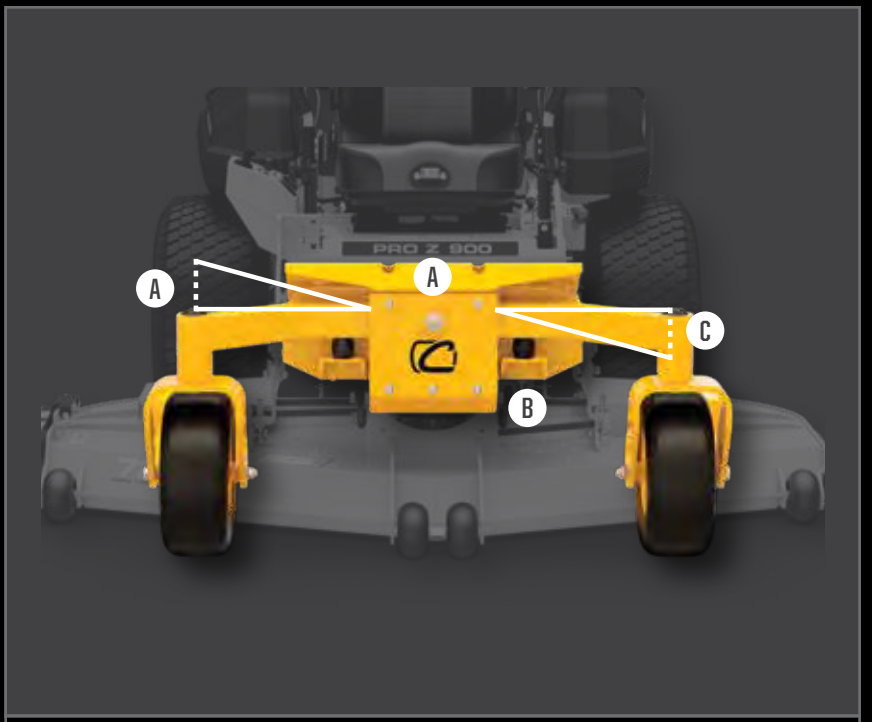

PIVOTING FRONT AXLE

WITH ISOLATION-DAMPENING SYSTEM MOUNTS

A pivoting front axle allows the front end of the PRO Z™ to ride across uneven terrain while helping protect the quality of the cut.

The frame and axle float as the PRO Z™ moves, allowing the deck to follow the shape of the terrain and help avoid scalping.


- A 2 1/4" of travel (4 1/2" of total travel)
- B Isolation-dampening system (standard on the PRO Z™ 900 Series)
- C Maximum angle of travel up to 6 degrees

PRO Z™ STRENGTH

Strength without compromise.

You expect the best and the PRO Z™ Series deck delivers. Fully fabricated and triple plated steel thickness with top and bottom reinforcements–so you can power through the rigors of your job, day in and day out.



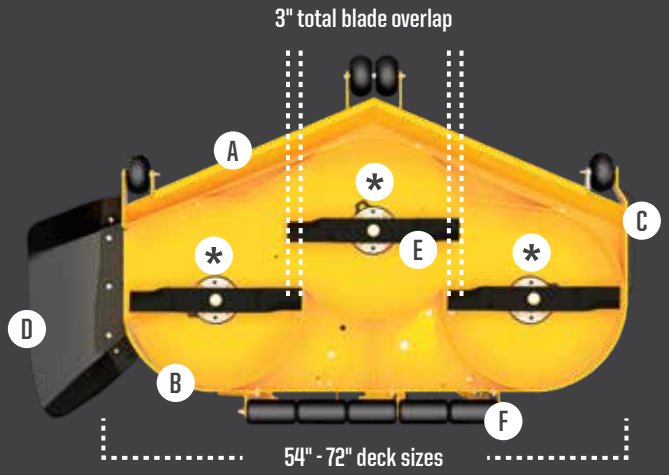

DECKS BUILT TO LAST

Tackle tough conditions with a triple-7-gauge steel cutting deck:
a 7-gauge steel deck shell with 7-gauge steel top and bottom reinforcements.

Durability

- **A** 1/4" leading rolled edge
- **B** 5/16" steel side reinforcements
- **C** 3/4" wear guard
- * Maintenance-free spindle assembly

Quality Cut

- **D** Flexible rubber discharge chute
- **E** High-lift Marbain® blades*
  (with blade tip speed up to 18,500 fpm)
- **F** Adjustable rear striping roller
  (standard on the PRO Z® 900 Series)

HARD-WORKING FRONT END

Help absorb the impact of rough terrain with front-end construction featuring a combination of axle, hub and yoke size.

- **A** 2" x 3" pivoting front axle
- **B** Isolation-dampening system
  (standard on the PRO Z™ 900 Series)
- **C** 5" steel hubs
- **D** 1/2" thick steel front yokes
- * Sealed maintenance-free ball bearings




* Marbain® is a trademark of Fisher-Barton Inc.

PRO Z™ PERFORMANCE

Built to meet high standards.

High standards like yours need high performance. That's why the PRO Z™ Series was engineered for consistent cut quality in varying conditions. Featuring high-torque, commercial transmissions and high-horsepower, commercial-grade engines for optimal blade tip speed–and precise, single passes through thick grass.

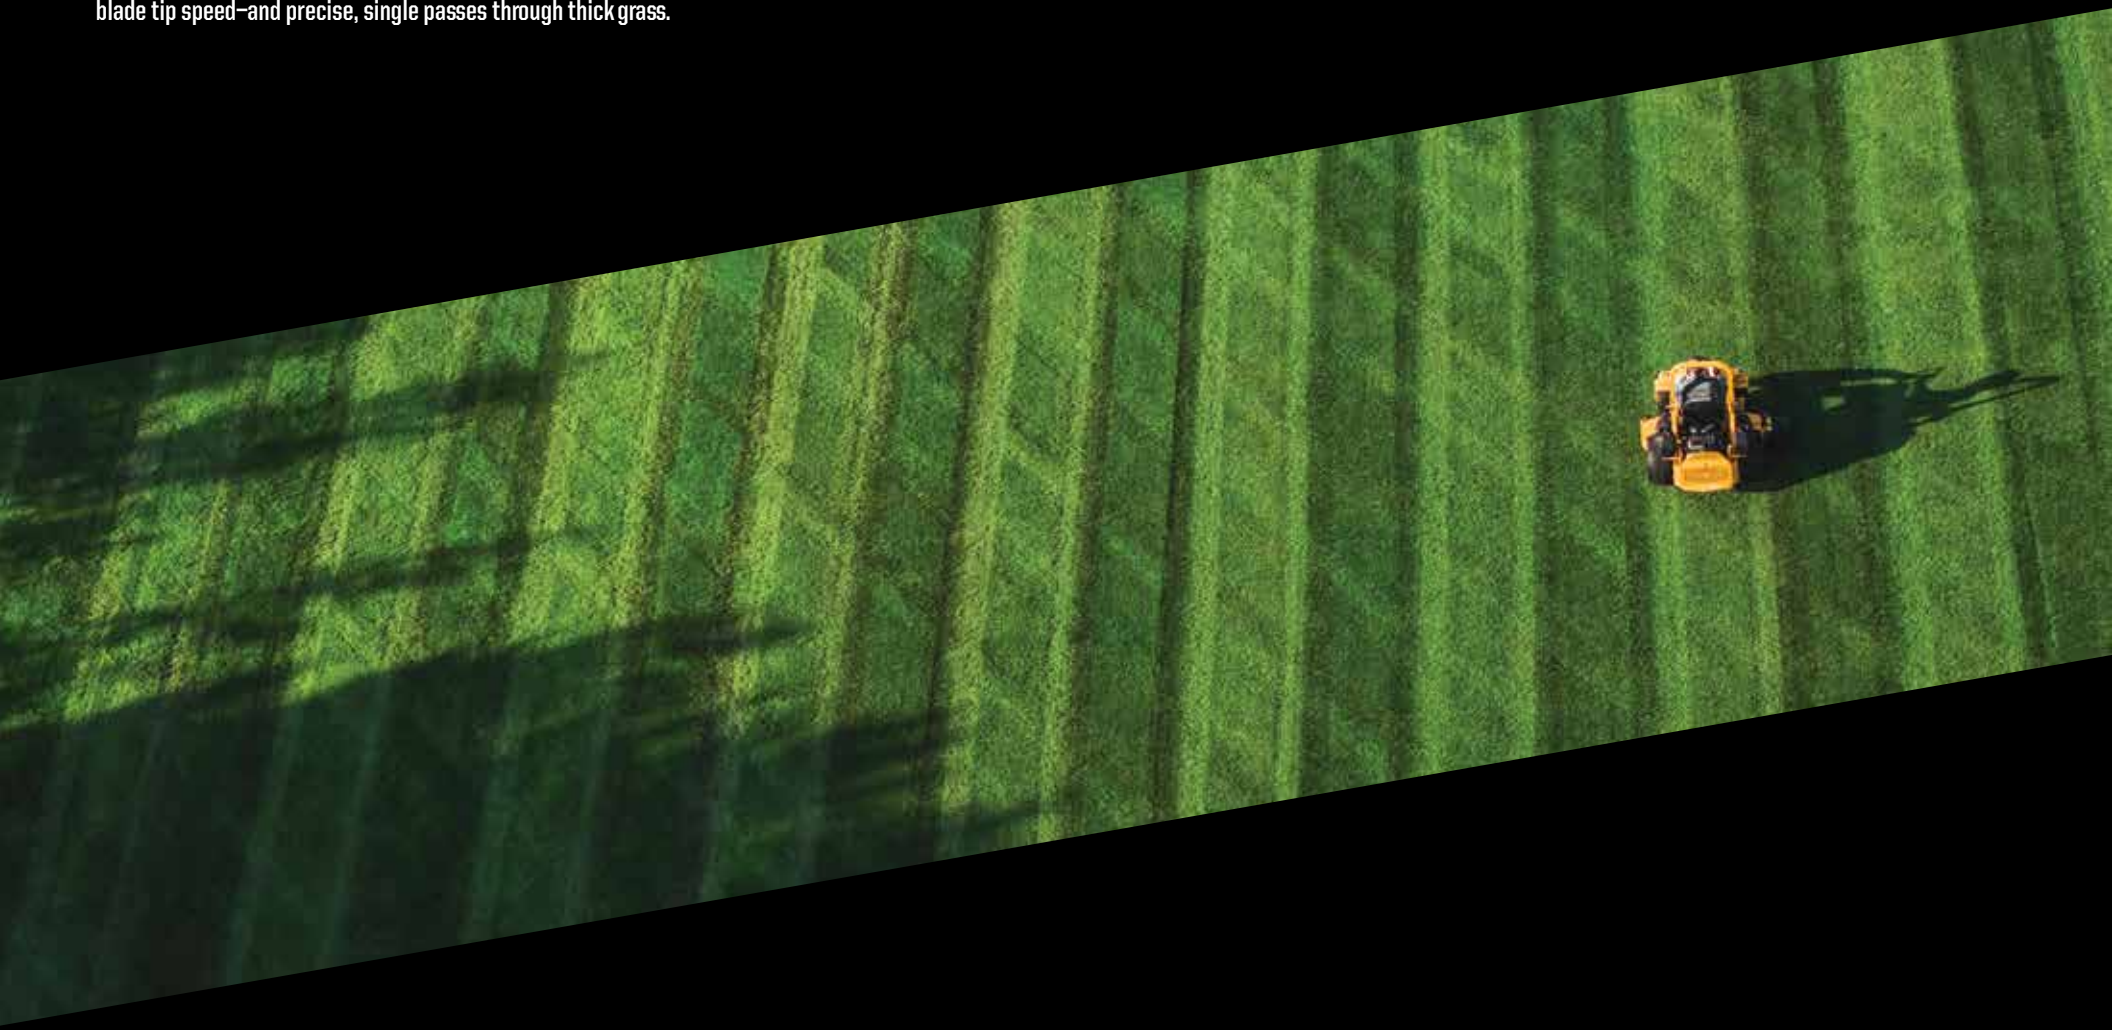

POWERFUL KAWASAKI® ENGINES




EFI engine technology (available on select models)

- Designed to deliver excellent horsepower
- Optimal balance of torque and power
- Blade speed up to 18,500 fpm


Shown above:
Kawasaki FX Series 38.5 hp** (999cc)
Available on PRO Z™ 900 Series Mowers

MAX SPEED

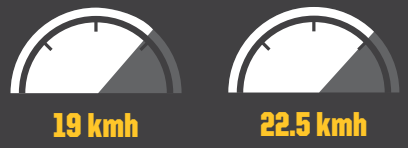


COMMERCIAL-QUALITY CUT AT HIGH SPEEDS

High-lift Marbain® blades* with
blade tip speed up to 18,500 fpm

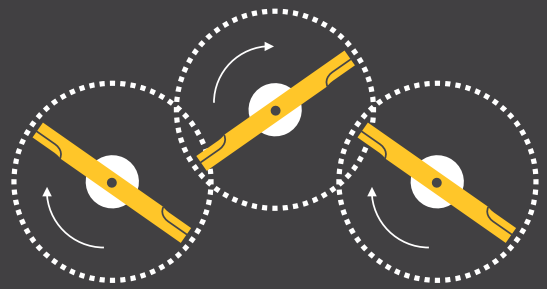

3" total blade overlap
(help save time by cutting more grass in one pass)

ENGINE HORSEPOWER AND TORQUE

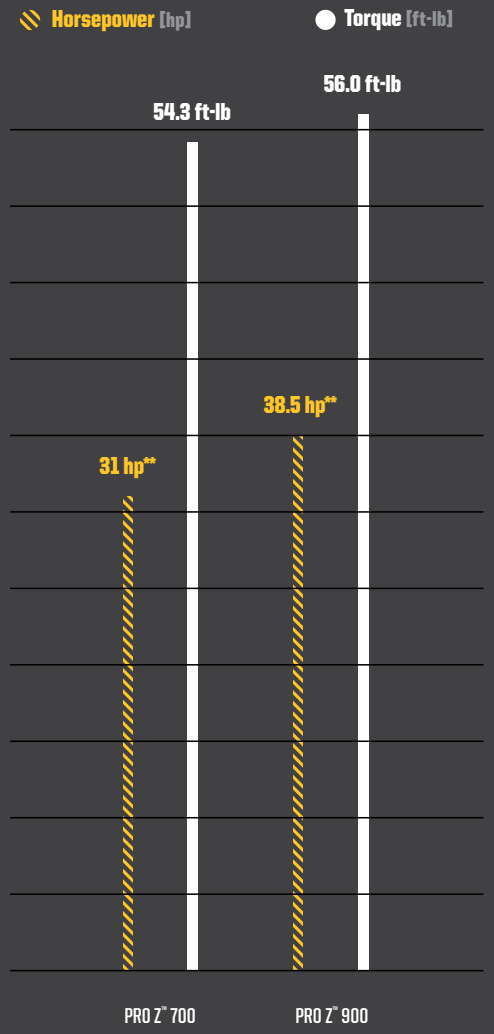

* Marbain® is a trademark of Fisher-Barton Inc.
** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.


PRO X
36

PRO X™ SERIES

Different done better.

Your business stands apart. Your machines should too. The PRO X™ Series takes stand-on productivity to the next level with zero-turn maneuverability, easy-to-adjust suspension, and a fully fabricated deck–helping your operation go further.



What makes the Pro X™ Series?

COMPACT FOOTPRINT
OCCUPIES MINIMAL TRAILER SPACE

EXCELLENT GROUND CLEARANCE
24-INCH REAR TIRES

OPTIMAL PERFORMANCE
INTUITIVE MANEUVERABILITY

IMPACT ABSORPTION
ADJUSTABLE SUSPENSION

STRENGTH WITHOUT COMPROMISE
ULTRA-COMFORTABLE RIDE


PRO X 600



PRO X 434

HORSEPOWER:
24 hp±

ENGINE DISPLACEMENT:
747cc

CUTTING WIDTH:
34"

REAR TIRES:
20" x 6.5" - 10"

WARRANTY:
4-Year Limited / 800 Hour Limit Warranty (whichever occurs first)*



PRO X 448

HORSEPOWER:
24 hp±

ENGINE DISPLACEMENT:
747cc

CUTTING WIDTH:
48"

REAR TIRES:
20" x 8" - 10"

WARRANTY:
4-Year Limited / 800 Hour Limit Warranty (whichever occurs first)*



PRO X 636

HORSEPOWER:
18.5 hp**

ENGINE DISPLACEMENT:
603cc

CUTTING WIDTH:
36"

REAR TIRES:
21" x 8.5" - 10"

WARRANTY:
2-Year Limited / No Hour Limit Warranty*



PRO X 648

HORSEPOWER:
22 hp**

ENGINE DISPLACEMENT:
726cc

CUTTING WIDTH:
48"

REAR TIRES:
24" x 9.5" - 12"

WARRANTY:
3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*



PRO X 654

HORSEPOWER:
25.5 - 34.5 hp**

ENGINE DISPLACEMENT:
822-852 cc

CUTTING WIDTH:
54"

REAR TIRES:
24" x 12" - 12"

WARRANTY:
3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*



PRO X 660

HORSEPOWER:
25.5 - 29.5 hp**

ENGINE DISPLACEMENT:
822-852 cc

CUTTING WIDTH:
60"

REAR TIRES:
24" x 12" - 12"

WARRANTY:
3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*


PRO X™ ATTACHMENTS

Attachments Sold Separately



Side bagger

Side-mounted steel bagger with 4.3 cu-ft of capacity for grass, leaves and debris.



Light kit

Help illuminate your mowing path with the easy-to-install pre-wired LED light kit that has pre-drilled mounting points.

* For warranty details and exclusions, please visit cubcadet.ca or visit your local dealer.
** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.
± As rated by KOHLER®, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer.

ACCESSORIES
SOLD SEPARATELY

	PRO Z™ 700					PRO Z™ 900			
	Z 754 L	Z 754 S	Z 760 L	Z 760 S	Z 772 L	Z 960 L EFI	Z 960 S EFI	Z 972 L EFI	
BAGGING SYSTEMS									
Power-Assist Triple Bagger	●	●	●	●		●	●		
Power-Assist Clamshell Bagger	●	●	●	●		●	●		
Bagger Weigh Kit / Front Weigh Kit	●	●	●			●			
PRO Z™ Triple Bag Kit	●	●	●	●		●	●		
Blower Mounting Kit	●	●	●	●		●	●		
PRO Z™ Blower Fan Assembly	●	●	●	●		●	●		
Mulching Kit	●	●	●	●		●	●		
4.3 cu-ft Steel Bagger									
Non-Power Bagger									
DECK MOUNTED STRIPING KITS									
Deck Mounted Striping Kit	●	●	●	●					
ELECTRONICS									
12V Outlet Kit (dash-mounted)	●	●	●	●	●	●	●	●	
Light Kit	●	●	●	●	●	●	●	●	
SNOW ATTACHMENTS AND ACCESSORIES									
Tire Chains (1 set of 2 chains)	●	●	●	●	●	●	●	●	
OTHER									
Electronic/Power Deck Kit (dash-mounted)	●	●	●	●	●	●	●	●	
24" Traction Tire / Rim (set of 2)	●	●	●	●					
26" Traction Tire / Rim (set of 2)					●	●	●	●	
24" x 12" - 12" Singe Tire / Rim	●	●	●	●					
26" x 12" - 12" Singe Tire / Rim					●	●	●	●	
Discharge Block-Off Kit									

	PRO Z™ 900			PRO X™							
	PRO Z 972 S EFI	PRO Z 972 SD DUALLY EFI	PRO Z 972 SDL EFI	X 434	X 448	X 636	X 648	X 654	X 654 EFI	X 660	X 660 EFI
	•	•	•	•	•	•	•	•	•	•	•
						•	•	•	•	•	•
				•	•	•	•	•	•	•	•
				•	•		•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•	•
	•	•	•								
	•										
		•									
		•									
		•									
							•	•	•	•	•

PRO Z™ SERIES

PRO Z™ 700

	Z 754 L	Z 754 S	Z 760 L	Z 760 S	Z 772 L
ENGINE AND DRIVE SYSTEM					
Engine / Manufacturer	Kawasaki® FX 850		Kawasaki® FX 921V		
Horsepower	27 hp**		31 hp**		
Displacement	852cc		999cc		
Fuel Capacity	56.7L (twin 28.3L tanks)				
Transmission	Hydro-Gear® 4400 with dual release levers				
Ground Speed (forward/reverse)	Up to 19.3 kmh / 9.6 kmh				
MOWER DECK					
Cutting Width	54"		60"		72"
Deck Shell Construction	Floating, fabricated 7 ga (0.187") steel				
Reinforcements (top/bottom - leading edge)	7 ga / 7 ga - 1/4"				
Side Reinforcement	5/16" steel				
Wear Guard	3/4" trim-side (polymer)				
Blades / Blade Tip Speed	3 high-lift Marbain® blades*** / 18,500 fpm				
Spindle Construction	8" sealed cast-aluminum housing (maintenance-free)				
Discharge Chute	High-density rubber				
Deck Lift System	Foot pedal with spring assist				
Height Positions / Height Range	16 / 1" - 5"				
CHASSIS					
ROPS	2" x 2" quick-latch toolless foldable 3-position				
Rear Bumper	5/16"-thick steel, standard rear hitch (e-coated)				
Additional Bumper Features	Pre-drilled mounts for attachments				
Frame	Fully welded, 3/8" x 5" laser-cut steel full-length (e-coated)				
Additional Frame Features	Integrated tie-down slots				
Safety Lighting	–				
Front Axle	2" x 3" solid steel with sealed ball bearings				
Front Yoke	1/2"-thick steel with sealed ball bearings				
OPERATION					
PTO (L/S models)	Warner PTO clutch (200 ft-lb / 225 ft-lb)				
Steering Control (L/S models)	Lap bar / adjustable tilting steering wheel with EPS				
Operator Controls	Low-profile throttle lever with dash guard				
Additional Controls	Sealed key switch / fingertip engagement PTO / resettable maintenance meter				
Parking Brake (L/S models)	Hand operated				
Front Tires - 2 (L/S models)	13"x 6.5"-6" Reliance Carlisle run-flat	15" x 6" - 6" Kenda Turf Tires K505	13"x 6.5"-6" Reliance Carlisle run-flat	15"x 6"-6" Kenda K505	13"x 6.5"-6" Reliance Carlisle run-flat
Rear Tires - 2 (L/S models) *PRO Z 972 SD EFI & 972 SDL EFI - 4 Rear Tires*	Kenda Performance 24" x 12" - 12"				
Seat Type	High-back dial suspension, EVC cushion, seat belt, angle-back adjust, lumbar support, padded armrests, isolation-dampening system mounted base (lateral suspension)				
Seat Control Swivel	–				
DIMENSIONS					
Length	86"				
Width (chute up / down)	57" / 68"		62" / 73"		73" / 85"
Height (ROPS down / up)	52" / 74"				
Weight (base)	1,459 / 1,592 lbs		1,488 / 1,621 lbs		1,591 lbs
WARRANTY					
Warranty Information*	3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*				

* For warranty details and exclusions, please visit cubcadet.ca or visit your local dealer..
** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.
***Marbain® is a trademark of Fisher-Barton Inc.

PRO Z™ 900

Z 960 L EFI	Z 972 L EFI	Z 960 S EFI	Z 972 S EFI	Z 972 SD DUALLY EFI	Z 972 SDL EFI
Kawasaki® FX1000V EFI					
38.5 hp**					
999cc					
56.7L (twin 28.3L tanks)					
Hydro Gear® 5400 (16cc)				Hydro Gear® 5400® (16cc) - Dual Wheel	Hydro Gear® 5400 (16cc) - Dual Wheel
Up to 22.5 kmh / 9.6 kmh				Up to 22.5 kmh / 9.6 kmh	
60"	72"	60"	72"		
Floating, fabricated 7 ga (0.187") steel					
7 ga / 7 ga - 1/4"					
5/16" steel					
3/4" trim-side (polymer)					
3 high-lift Marbain® blades*** / 18,500 fpm					
8" sealed cast-aluminum housing (maintenance-free)					
High-density rubber					
Foot pedal with spring assist				Electronic power deck lift system (included)	
16 / 1" - 5"					
2" x 2" quick-latch toolless foldable 3-position					
5/16"-thick steel, standard rear hitch (e-coated)					
Pre-drilled mounts for attachments					
Fully welded, 3/8" x 5" laser-cut steel full-length (e-coated)					
Integrated tie-down slots					
–					6 LED Lights for 360 degrees of lighted visiblity; amber beacon with 3 position adjustments
2" x 3" solid steel with sealed ball bearings and isolation-dampening system					
1/2"-thick steel with sealed ball bearings					
Warner PTO clutch (200 ft-lb) with Soft-Start		Warner PTO clutch (225 ft-lb) with Soft-Start			
Lap bar		Adjustable tilting steering wheel with EPS			
Low-profile throttle lever with dash guard					
Sealed key switch / fingertip engagement PTO / resettable maintenance meter					
Hand operated				Hand operated with hydro-pump release	
Smooth (run flat) 13" x 6.5" - 6"		Turf 16" x 6.5" - 8"			
Turf 24" x 12" - 12"		Turf 26" x 12" - 12"		DualTerraTrac tread 25" x 9" - 12" (18" trac width)	
High-back air-ride suspension, EVC cushion, seat belt, angle-back adjust, lumbar support, padded armrests, isolation-dampening system mounted base (lateral suspension)					
–					User-controlled lock / unlock swivel seat for operator leveling up to 30-degrees total / 15-degrees left or right travel
88"					
62" / 73"	74" / 85"	62" / 73"	74" / 85"		
48" / 75"	52" / 75"	48" / 75"	52" / 75"	49" / 75"	
1,447 lbs	1,596 lbs	1,580 lbs	1,631 lbs	1,850 lbs	1,890 lbs
3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*					

* For warranty details and exclusions, please visit cubcadet.ca or visit your local dealer.
** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.
***Marbain® is a trademark of Fisher-Barton Inc.

PRO X™ SERIES

PRO X™ 600

	X 434	X 448	X 636	X 648	X 654	X 654 EFI	X 660	X 660 EFI
ENGINE AND DRIVE SYSTEM								
Engine / Manufacturer	KOHLER® KT-PRO		Kawasaki® FS600v	Kawasaki® FX691V	Kawasaki® FX801V	Kawasaki® FX820 EVO EFI	Kawasaki® FX801V	Kawasaki® FX820 EVO EFI
Horsepower	24 hp ±		18.5 hp**	22 hp**	25.5 hp**	34.5 hp**	25.5 hp**	34.5 hp**
Displacement	747cc		603cc	726cc	852cc	822cc	852cc	822cc
Fuel Tank Capacity With Gauge	20.4L		22.7L	28.4L				
Transmission	Hydro-Gear® ZT-3100		12cc Hydro-Gear® Pumps / 14.5 cu.in. Parker Wheel Motors					
Ground Speed (forward/reverse)	Up to 11.2 kmh / 5.6 kmh		Up to 13.6 kmh / 5.6 kmh	Up to 16 kmh / 8 kmh				
MOWER DECK								
Cutting Width	34"	48"	36"	48"	54"		60"	
Blades	2 High-Lift 16.75" Blades with 0.625" blade overlap	3 High-Lift 16.5" Blades with 1.2" blade overlap	2 high-lift 18.5" Marbain® blades*** with 1.5" blade overlap	3 high-lift 17" Marbain® blades*** with 1.5" blade overlap	3 high-lift 19" Marbain® blades*** with 1.5" blade overlap		3 high-lift 21" Marbain® blades*** with 1.5" blade overlap	
Deck Construction	10 ga shell with 7 ga reinforcement on the bottom side only		10 ga shell with 7 ga top and bottom reinforcement					
Reinforcements (top/bottom – leading edge)	-		–					
Side Reinforcement	-		–					
Wear Guard	-		–					
Spindle Design	Sealed cast aluminum housing (maintenance-free)		5" sealed cast aluminum housing (maintenance-free)	HD 8" aluminum housing, 35mm double-row sealed ball bearings, 1-3/8" through-shaft and maintenance-free design				
Discharge Chute	High-density rubber		High-densityrubber					
Deck Lift System	-							
Deck Height Adjust	Hand lever adjusting spring assist, pin selector for height		Hand lever adjusting spring assist, pin selector for height					
Cutting Height	1.5" - 4.5"		1.5" - 4"	1" - 5"				
Anti-Scalp Deck Gauge Wheels	-	2 front deck gauge wheels	-	2 front deck gauge wheels	4 front deck gauge wheels			
CHASSIS								
Frame	1.5" x 3" full-length tube frame		1.5" x 3" full-length tube frame	2" x 3" full-length tube frame				
Drive Axles - 1	1"		1-1/8"					
Front Axle	1.5" x 3" tube construction		2" x 3" tube construction					
Front Caster / Yoke	5/16"		3/8" thick steel					
Rear Track Width	33"	35.75"	33"	47"	53"		57"	
Additional Frame Features	-		–					
OPERATION								
PTO Clutch Engagement & Type	Electronic with quick reset		Electronic with quick reset					
Starting	-		Electric starter					
Battery Cover / Storage	Netted Storage		Toolless	Toolless battery cover / oversized cup holder, storage compartment with cargo net				
Suspension	3-position adjustable suspension platform		3-position rod adjust suspension foot platform	Hand lever adjust, 3-position spring suspension foot platform				
Instrumentation	Hour meter, key switch, throttle, choke		Hour meter, fuel gauge, key switch, throttle, choke			Hour meter, fuel gauge, key switch, throttle	Hour meter, fuel gauge, key switch, throttle, choke	Hour meter, fuel gauge, key switch, throttle
Cushion Padding	3-position operator cushion		3-position operator cushion	3-position operator cushion with cargo pocket				
Parking Brake / Brake Type	Hand lever internal brake		Hand lever control / scrub brake	Hand lever control / external band				
Front Caster Tires - 2	11" x 6" - 5" smooth		11" x 4" - 5" smooth flat-free	13" x 5" - 6" smooth flat-free				
Rear Drive Tires - 2	20" x 6.5" - 10"	20" x 8" - 10"	21" x 8.5" - 10"	24" x 9.5" - 12"	24" x 12" - 12"			
DIMENSIONS								
Length	68"		62"	69"				
Width (chute down/up)	34.375"/45.75"	48.25"/60.50"	50" / 38"	62" / 50"	68" / 56"		74" / 62"	
Height	49.25"		47"					
Weight	675lbs	710lbs	850	1,015	1,080		1,115	
WARRANTY								
Warranty Information*	4-Year Limited / 800 Hour Limit Warranty (whichever occurs first)*		2-Year Limited / No Hour Limit Warranty*	3-Year Limited / No Hour Limit Warranty* and/or 5-Year Limited / 1200 Hour Limit Warranty (whichever occurs first)*				

* For warranty details and exclusions, please visit cubcadet.ca or visit your local dealer.
** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.
*** Marbain® is a trademark of Fisher-Barton Inc.
± As rated by KOHLER®, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer.



YOUR AUTHORIZED CUB CADET® DEALER MAKES YOUR EXPERIENCE EVEN BETTER.

INDEPENDENT DEALER
Cub Cadet®

Cub Cadet® dealers know their equipment. And they know how to take care of it and their customers. With exceptional financing offers, special promotion, and the expertise you can only find from professionals who sell and service Cub Cadet® equipment every day.

Support as strong as our machines, seven days a week, visit cubcadet.ca or call toll-free 1-800-668-1238



FACEBOOK.COM/CUBCADET @CUBCADETCA CUBCADETNA

EXCEPTIONAL FINANCING OFFERS[1]

GENUINE Cub Cadet PARTS

[1] Restrictions apply. See your local dealer or visit cubcadet.ca/en/financing for details.

Cub Cadet® commercial products are intended for professional use.

This brochure is for advertisement purposes only. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual and on the machine. Models subject to limited availability.

Images may not reflect dealer inventory and/or unit specifications. Specifications subject to change without notice.

© 2026 Cub Cadet | Printed in Canada | CC23-389 5198966