



SERVICE BULLETIN



August, 2024

Subject: High Altitude / Sea Level Specifications

No. 2025-1

MODEL YEAR	MODEL
2025	All Ski-Doo

TABLE OF CONTENTS

GENERAL INFORMATION..... 3

 Previous Model Year Vehicles3

600 EFI..... 5

 MXZ NEO 600 EFI6

 SUMMIT NEO7

 MXZ NEO+ 600 EFI8

 SUMMIT NEO+ 600 EFI9

 MXZ SPORT 600 EFI10

 BACKCOUNTRY SPORT 600 EFI11

 EXPEDITION SPORT 600 EFI12

 SKANDIC SPORT/ LE 600 EFI12

 TUNDRA SPORT/ LE 600 EFI12

 SUMMIT NEO+13

600R E-TEC 14

 EXPEDITION LE 20" 600R E-TEC15

 SKANDIC LE/ SE 20" 600R E-TEC15

 EXPEDITION LE 24" 600R E-TEC16

 SKANDIC LE/ SE 24" 600R E-TEC16

 MXZ 129"ADRENALINE/ BLIZZARD/ X/ X-RS
 600R E-TEC17

 MXZ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-
 RS COMP 600R E-TEC 18

 RENEGADE ENDURO 600R E-TECC 18

 BACKCOUNTRY ADRENALINE 600R E-TEC 19

 SUMMIT SP 146" AND 154" 600R E-TEC
 (CAN/USA)20

 BACKCOUNTRY 146" 600R E-TEC (EUROPE) .21

 SUMMIT SP 146" AND 154" 600R E-TEC
 (EUROPE)21

850 E-TEC 22

 EXPEDITION SE/ Xtreme 850 E-TEC23

 FREERIDE 146" 850 E-TEC SEA-LEVEL
 (CAN/USA)24

 SUMMIT 146" 850 E-TEC SEA-LEVEL (CAN/USA)
 24

 FREERIDE 146" 850 E-TEC SEA-LEVEL (EUR) 26

 SUMMIT 146" 850 E-TEC SEA-LEVEL (EUR)26

 FREERIDE 154" AND 165" 850 E-TEC SEA-
 LEVEL (CAN/USA)28

 SUMMIT 154" AND 165" 850 E-TEC SEA-LEVEL
 (CAN/USA)28

 FREERIDE 154" 850 E-TEC SEA-LEVEL (EUR) 30

 SUMMIT 154" AND 165" 850 E-TEC SEA-LEVEL
 (EUR).....30

SUMMIT 146" 850 E-TEC HIGH ALTITUDE (CAN/USA)	32	RENEGADE ADRENALINE/ ENDURO 900 ACE	59
FREERIDE 154" AND 165" 850 E-TEC HIGH ALTITUDE (CAN/USA)	34	SKANDIC LE/ SE 20" 900 ACE	60
SUMMIT 154" AND 165" 850 E-TEC HIGH ALTITUDE (CAN/USA)	34	EXPEDITION LE 24" 900 ACE	61
MXZ 129" ADRENALINE/ BLIZZARD/ X/ X-RS 850 E-TEC	36	SKANDIC LE/ SE 24" 900 ACE	61
MXZ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-RS COMP 850 E-TEC	37	900 ACE TURBO	62
RENEGADE ENDURO 850 E-TEC	37	EXPEDITION LE/ SE 20" 900 ACE TURBO	63
BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (CAN/USA)	38	EXPEDITION LE 24" 900 ACE TURBO	63
BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (CAN/USA)	40	GRAND TOURING LE/ PLATINUM 900 ACE TURBO	64
BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (EUR).....	42	RENEGADE ADRENALINE 900 ACE TURBO....	65
850 E-TEC TURBO R	44	RENEGADE ENDURO 900 ACE TURBO	65
FREERIDE 146" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA)	45	900 ACE TURBO R.....	66
FREERIDE 154" AND 165" 850 E-TEC TURBO R SEA LEVEL (EUR).....	46	EXPEDITION LE/ SE/ EXTREME 20" 900 ACE TURBO R	67
SUMMIT 154" AND 165" 850 E-TEC TURBO R SEA LEVEL (EUR).....	46	EXPEDITION LE 24" 900 ACE TURBO R.....	67
FREERIDE 154" AND 165" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA).....	48	GRAND TOURING LE/ PLATINUM 900 ACE TURBO R	68
SUMMIT 154" AND 165" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA).....	48	RENEGADE ADRENALINE/ ENDURO/ X/ X-RS 900 ACE TURBO R	69
MXZ 137" X-RS COMP 850 E-TEC TURBO R....	50	OPTIONAL DRIVE PULLEY SPRING RATES AND SPECIFICATIONS	70
BACKCOUNTRY X-RS 850 E-TEC TURBO R....	51	eDrive II (900 ACE) and eDrive II LC (600 ACE).70	
600 ACE.....	52		
EXPEDITION SPORT 600 ACE	53		
TUNDRA SPORT/ LE 600 ACE	53		
RENEGADE SPORT 600 ACE	54		
GRAND TOURING SPORT 600 ACE	54		
SKANDIC LE 600 ACE	55		
900 ACE.....	56		
EXPEDITION SPORT 900 ACE	57		
EXPEDITION LE/ SE 20" 900 ACE	58		
GRAND TOURING SPORT/ LE/ PLATINUM 900 ACE	59		

GENERAL INFORMATION

Previous Model Year Vehicles

This bulletin supplies all the information required to modify current year vehicles for high altitude and/or sea level riding.

MODEL YEAR	LATEST REVISION OF BULLETIN NO.
2025	2025-1
2024	2024-1
2023	2023-1
2022	2022-1
2021	2021-1

NOTE: Throughout this entire document, shaded areas give factory settings (that could apply through different altitudes) while N/A stands for “not applicable”.

NOTICE The following modifications and adjustments apply for high altitude operation as well as sea level operation.

PARTS AND LABOR COST ARE NOT COVERED BY BRP LIMITED WARRANTY.

Table Format

The shaded portions of the table indicate factory settings.

ALTITUDE	
Parts to be modified	Recommended Adjustment

Sea Level Calibration Kit (CAN/USA only)

When the high altitude calibration must be modified to sea level calibration on Freeride™ and Summit™ models (146" and up), the following kit may be used. This kit includes all required parts to set-up the vehicle.

MODEL	PART NUMBER
Freeride and Summit 850 E-TEC except turbo	
146", 154" and 165"	860201905

Kit Description

SEA LEVEL CALIBRATION KIT (P/N 860201905)			
DESCRIPTION		PART NUMBER	QTY
Drive pulley	Ramp 990	417224326	3
	Weight	417224507	3
	Pivot 38 mm / 16,7 g	417224222	3
	Spring (Blue/Yellow)	417224015	1
	M14 Conical spring washer	250200144	1
Driven pulley	Spring (Black)	417127039	1

600 EFI

MXZ NEO 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Yellow (P/N 417224329)			Blue/Purple (P/N 417224168)	
Ramp		885 (P/N 417224729)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			4	
Mass		N/A			26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100		2500				
Maximum RPM \pm 100		6500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table.						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127857)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

SUMMIT NEO

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)			Purple/White (P/N 417224167)	
Ramp		885 (P/N 417224729)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			4	
Mass		N/A			26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100		2500				
Maximum RPM ± 100		6500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

MXZ NEO+ 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Orange (P/N 417224328)			Blue/Blue (P/N 417224013)	
Ramp		885 (P/N 417224729)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			3	
Mass		N/A			33 mm/15,2 g (P/N 417224221)	
Engagement RPM \pm 100		2500				
Maximum RPM \pm 100		6500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224221), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127857)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

SUMMIT NEO+ 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Orange (P/N 417224328)			Blue/Purple (P/N 417224168)		
Ramp	885 (P/N 417224729)			972 (P/N 417224268) ¹		
Calibration cam position	N/A			3		
Mass	N/A			33 mm/15,2 g (P/N 417224221)		
Engagement RPM \pm 100	2500					
Maximum RPM \pm 100	6500					
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224221), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Brown (P/N 417127857)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44° (P/N 417127367)					

MXZ SPORT 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Blue (P/N 417224013)			Purple/Blue (P/N 417224165)	
Ramp		886 (P/N 417224688)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			4	5
Mass		N/A			26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100		3200			3500	
Maximum RPM ± 100		7500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Green (P/N 417127137)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

BACKCOUNTRY SPORT 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)			Purple/Blue (P/N 417224165)		
Ramp	886 (P/N 417224688)			972 (P/N 417224268) ¹		
Calibration cam position	N/A			4	5	
Mass	N/A			26 mm/13,1 g (P/N 417224220)		
Engagement RPM \pm 100	3200			3500		
Maximum RPM \pm 100	7500					
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

EXPEDITION SPORT 600 EFI
SKANDIC SPORT/ LE 600 EFI
TUNDRA SPORT/ LE 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Yellow (P/N 417224171)			Blue/Blue (P/N 417224013)		
Ramp	887 (P/N 417224690)			972 (P/N 417224268) ¹		
Calibration cam position	N/A			4	5	
Mass	N/A			26 mm/13,1 g (P/N 417224220)		
Engagement RPM ± 100	2300			3100		
Maximum RPM ± 100	7500					
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

SUMMIT NEO+

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)			Purple/Blue (P/N 417224165)		
Ramp	971 (P/N 417224266)			972 (P/N 417225149) ¹		
Calibration cam position	4	5		4	5	
Mass	33 mm/15,2 g (P/N 417224221)			26 mm/13,1 g (P/N 417224220)		
Engagement RPM ± 100	3500			3000		
Maximum RPM ± 100	7500					
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

600R E-TEC

EXPEDITION LE 20" 600R E-TEC
SKANDIC LE/ SE 20" 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Blue (P/N 417224172)					
Ramp	971 (P/N 417224266)			972 (P/N 417224268)		
Calibration cam position	3	4	5	3	4	5
Mass	26 mm/13,1 g (P/N 417224220)					
Engagement RPM ± 100	3400			2900		
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

**EXPEDITION LE 24" 600R E-TEC
SKANDIC LE/ SE 24" 600R E-TEC**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Blue (P/N 417227172)					
Ramp	971 (P/N 417224266)			972 (P/N 417224268)		
Calibration cam position	4	5	4	5		
Mass	38 mm/16,7 g (P/N 417224222) + 2 mm (P/N 417224363)			38 mm/16,7 g (P/N 417224222)		
Engagement RPM \pm 100	3400			2800		
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

MXZ 129"ADRENALINE/ BLIZZARD/ X/ X-RS 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Blue (P/N 417224013)			Purple/Yellow (P/N 417224164)		
Ramp	901 (P/N 417224626)			967 (P/N 417224225)		
Calibration cam position	3	4	5	4		5
Mass	33 mm/15,2 g (P/N 417224221)			26 mm/13,1 g (P/N 417224220)		
Engagement RPM ± 100	3400			3900		
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	44° (P/N 417127367)					

**MXZ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-RS COMP 600R E-TEC
RENEGADE ENDURO 600R E-TECC**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Blue (P/N 417224013)			Purple/Yellow (P/N 417224164)		
Ramp	901 (P/N 417224626)			967 (P/N 417224225)		
Calibration cam position	3	4	5	4	5	
Mass	33 mm/15,2 g (P/N 417224221)			26 mm/13,1 g (P/N 417224220)		
Engagement RPM \pm 100	3400			3900		
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44° (P/N 417127367)					

BACKCOUNTRY ADRENALINE 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/White (P/N 417224167)			Purple/Yellow (P/N 417224164)		
Ramp	901 (P/N 417224626)			997 (P/N 417224430)		
Calibration cam position	3	4	5	4		5
Mass	38 mm/16,7 g (P/N 417224222)			26 mm/13,1 g (P/N 417224220)		
Engagement RPM ± 100	3400			4000		
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	46° - 42° XTI (P/N 417127715)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

SUMMIT SP 146" AND 154" 600R E-TEC (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Spring		Purple/White (P/N 417224167)			Yellow/Blue (P/N 417224172)		
Ramp		901 (P/N 417224626)			997 (P/N 417224430)		
Calibration cam position		3	4	5	3	4	5
Mass		38 mm/16,7 g (P/N 417224222)			33 mm/15,2 g (P/N 417224221)		
Engagement RPM ± 100		3400					
Maximum RPM ± 100		8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Black (P/N 417127039)			Blue (P/N 417127118)	
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		46° - 42° XTI (P/N 417127715)				

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

BACKCOUNTRY 146" 600R E-TEC (EUROPE)
SUMMIT SP 146" AND 154" 600R E-TEC (EUROPE)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/White (P/N 417224167)			Purple/Yellow (P/N 417224165)		
Ramp	901 (P/N 417224626)			997 (P/N 417224430)		
Calibration cam position	3	4	5	3	4	5
Mass	38 mm/16,7 g (P/N 417224222)			33 mm/15,2 g (P/N 417224221)		
Engagement RPM ± 100	3400					
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)			Blue (P/N 417127118)		
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	46° - 42° XTI (P/N 417127426)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

850 E-TEC

EXPEDITION SE/ Xtreme 850 E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)					
Ramp	982 (P/N 417224575)		904 (P/N 417224646)			
Calibration cam position	3	4	2	3	4	5
Mass	38 mm/ 16,7g (P/N 417224222) + 2 mm (P/N 417224363)		26 mm/13,1 g (P/N 417224220)			
Engagement RPM \pm 100	3800		2900			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42° - 40° (P/N 417127430)					

FREERIDE 146" 850 E-TEC SEA-LEVEL (CAN/USA)
SUMMIT 146" 850 E-TEC SEA-LEVEL (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3800			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42°-38° XTI (P/N 417127693)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

Chaincase Gears

146" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	49 (P/N 504153996)					
Chain	114 (P/N 504153393)					

FREERIDE 146" 850 E-TEC SEA-LEVEL (EUR)

SUMMIT 146" 850 E-TEC SEA-LEVEL (EUR)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)		
Ramp		990 (P/N 417224326)		965 (P/N 417224141)		
Calibration cam position		3	4	3	4	5
Mass		38 mm/ 16,7g (P/N 417224222)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)
Engagement RPM \pm 100		3300		3800		
Maximum RPM \pm 100		7900				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Green (P/N 417127137)		Blue (P/N 417127118)		
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		44°-42° XTI (P/N 417127825)		40° XTI (P/N 417127672)		

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6		4		

Chaincase Gears

146" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear						
Lower gear						
Chain						

FREERIDE 154" AND 165" 850 E-TEC SEA-LEVEL (CAN/USA)
SUMMIT 154" AND 165" 850 E-TEC SEA-LEVEL (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/16,7 g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3800			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

Chaincase Gears

154" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear						
Upper gear		21 (P/N 504153910)				
Lower gear		51 (P/N 504153997)				
Chain		116 (P/N 504153397)				

165" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear						
Upper gear		21 (P/N 504153910)				
Lower gear		53 (P/N 504153998)				
Chain		116 (P/N 504153397)				

FREERIDE 154" 850 E-TEC SEA-LEVEL (EUR)
SUMMIT 154" AND 165" 850 E-TEC SEA-LEVEL (EUR)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)		
Ramp		990 (P/N 417224326)		965 (P/N 417224141)		
Calibration cam position		3	4	3	4	5
Mass		38 mm/16,7 g (P/N 417224222)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)
Engagement RPM \pm 100		3300		3800		
Maximum RPM \pm 100		7900				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Green (P/N 417127137)		Blue (P/N 417127118)		
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		44°-42° XTI (417127825)		40° XTI (P/N 417127672)		

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6		4		

Chaincase Gears

154" AND 165" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear						
		21 (P/N 504153910)				
Lower gear		53 (P/N 504153998)				
Chain		116 (P/N 504153397)				

SUMMIT 146" 850 E-TEC HIGH ALTITUDE (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3600			
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	42°-38° XTI (P/N 417127693)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap	6		4			

Chaincase Gears

146" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	51 (P/N 504153997)					
Chain	116 (P/N 504153397)					

Sea Level Calibration Kit

MODEL	PART NUMBER
146"	860201905

FREERIDE 154" AND 165" 850 E-TEC HIGH ALTITUDE (CAN/USA)
SUMMIT 154" AND 165" 850 E-TEC HIGH ALTITUDE (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3600			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap	6		4			

Chaincase Gears

154" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	51 (P/N 504154110 504153997)					
Chain	116 (P/N 504153397)					

165" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	53 (P/N 504153998)					
Chain	116 (P/N 504153397)					

Sea Level Calibration Kit

MODEL	PART NUMBER
154" and 165"	860201905

MXZ 129" ADRENALINE/ BLIZZARD/ X/ X-RS 850 E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Spring		Blue/Blue (P/N 417224013)		Blue/Yellow (P/N 417224015)			
Ramp		968 (P/N 417224227)		967 (P/N 417224225)			
Calibration cam position		3	4	2	3	4	5
Mass		38 mm/ 16,7g (P/N 417224222)					
Engagement RPM \pm 100		3200		4000			
Maximum RPM \pm 100		7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Green (P/N 417127137)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		45° - 42° (P/N 417127534)				

**MXZ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-RS COMP 850 E-TEC
RENEGADE ENDURO 850 E-TEC**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Blue (P/N 417224172)		Yellow/Yellow (P/N 417224171)			
Ramp	968 (P/N 417224227)		967 (P/N 417224225)			
Calibration cam position	3	4	2	3	4	5
Mass	38 mm/ 16,7g (P/N 417224222)					
Engagement RPM ± 100	2900		3400			
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	44° - 42° (P/N 417127325)					

BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (CAN/USA)
 (Track with profile of 40 mm (1.6 in) and 38 mm (1.5in))

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		995 (P/N 417224450)			
Calibration cam position	4	5	3			4
Mass	38 mm/16,7 g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3800			
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	42° - 38° XTI (P/N 417127693)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

WITH 1.5" and 1.6" PROFILE TRACK						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear						21 (P/N 504153910)
Lower gear						45 (P/N 504153995)
Chain						112 (P/N 504153268)

BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (CAN/USA)
(Track with profile of 50 mm (2 in) and 63 mm (2-1/2 in))

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/16,7 g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3800			
Maximum RPM ± 100	7900					

Driven Pulley

146" MODELS						
	SEA LEVEL 0 M (0 FT)	600 m (2000 FT)	1200 m (4000 FT)	1800 m (6000 FT)	2400 m (8000 FT)	3000 m (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	42° - 38° XTI (P/N 417127693)					

154" MODELS						
	SEA LEVEL 0 M (0 FT)	600 m (2000 FT)	1200 m (4000 FT)	1800 m (6000 FT)	2400 m (8000 FT)	3000 m (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

WITH 2" PROFILE TRACK						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		23 (P/N 504153911)				
Lower gear		51 (P/N 504153997)				
Chain		116 (P/N 504153397)				

WITH 2.5" PROFILE TRACK						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		21 (P/N 504153910)				
Lower gear		51 (P/N 504153997)				
Chain		116 (P/N 504153397)				

BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (EUR)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	3	4	3	4	5	
Mass	38 mm/16,7 g (P/N 417224222)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3800			
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	44° - 42° XTI (P/N 417127825)		42° - 38° XTI (P/N 417127693)			

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

WITH 2" AND 2.5" PROFILE TRACK						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	51 (P/N 504153997)					
Chain	116 (P/N 504153397)					

850 E-TEC TURBO R

FREERIDE 146" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/purple 170-350 (417224166)					Purple/Yellow (P/N 417224164)
Ramp	951 (P/N 417224038)		761 (P/N 417224761)			903 (P/N 417224642)
Calibration cam position	3	2	3			4
Mass	38H mm/ (P/N 417224806) +14 mm (P/N 417 224241)	38 mm/ (P/N 417224222) +2 mm (P/N 417224363)	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)	33 mm/15,2 g (P/N 417224221)		38 mm (P/N 417224222) + 2 mm (P/N 417224363)
Engagement RPM \pm 100	3800					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Chaincase Gears

146" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	22BW (P/N 504154809)					
Lower gear	51BW (P/N 504154824)					
Chain	116BW (P/N 504153759)					

FREERIDE 154" AND 165" 850 E-TEC TURBO R SEA LEVEL (EUR)
SUMMIT 154" AND 165" 850 E-TEC TURBO R SEA LEVEL (EUR)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Yellow (P/N 417224015)		Purple/Purple (P/N 417224166)		Purple/Yellow (P/N 417224164)
Ramp		951 (P/N 417224038)		761 (P/N 417224761)		903 (P/N 417224642)
Calibration cam position		2		3		4
Mass	33 mm/15,2 g (P/N 417 224221)	26 mm (P/N 417 224115)	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)	33 mm/15,2 g (P/N 417224221)	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)	
Shim	Yes (P/N 417224757)					
Engagement RPM \pm 100	3400					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Black (P/N 417127039)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		40° XTI (P/N 417127672)				

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

Chaincase Gears

154" AND 165" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		21BW (P/N 504154188)				
Lower gear		53BW (P/N 504154823)				
Chain		116BW (P/N 504153759)				

FREERIDE 154" AND 165" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA)
SUMMIT 154" AND 165" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA)
Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Purple (P/N 417224166)					Purple/Yellow (P/N 417224164)
Ramp	951 (P/N 417224038)		761 (P/N 417224761)			903 (P/N 417224642)
Calibration cam position	3	2	3			4
Mass	38H mm/ 19,5g (P/N 417224 806) + 14 mm (P/N 417224 241)	38 mm/ 16,7g (P/N 417224 222) + 2 mm (P/N 417224 363)	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)		33 mm /15,2 g (P/N 417 224221)	38 mm/ 16,7g (P/N 417224222) + 2 mm (P/N 417224363)
Engagement RPM \pm 100	3800					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 (10000M FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 (10000M FT)
Stopper Strap		6			4	

Chaincase Gears

154" AND 165" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	22BW (P/N 504154809)	21BW (P/N 504154188)				
Lower gear	53BW (P/N 504154823)					
Chain	116BW (P/N 504153759)					

MXZ 137" X-RS COMP 850 E-TEC TURBO R Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple 170/350 (P/N 417224166)		Purple/Blue 170/300 (P/N 417224165)			
Ramp	978		984			
Calibration cam position	3	4	2		3	
Mass	33 mm (P/N 417224221) + 2 mm (P/N 417224363) + 4 mm (P/N 417224365)			33 mm (P/N 417224221)		
Shim	Yes (P/N 417224757)					
Engagement RPM \pm 100	4000					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 44° XTI					

Chaincase Gears

137" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	27 (P/N 504193913)					
Lower gear	49 (P/N 504153996)					
Chain	112 (P/N 504153268)					

BACKCOUNTRY X-RS 850 E-TEC TURBO R

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple 170/350 (P/N 417224166)		Purple/Blue 170/300 (P/N 417224165)			
Ramp	978		984			
Calibration cam position	3	4	2		3	
Mass	33 mm (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364) + 4 mm (P/N 417224365)			26 mm (P/N 417224220) + 2 mm (P/N 417224363)		
Shim	Yes (P/N 417224757)					
Engagement RPM \pm 100	4000					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

600 ACE

**EXPEDITION SPORT 600 ACE
TUNDRA SPORT/ LE 600 ACE**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Red (P/N 417223745)	Red/Yellow (P/N 417 223748)	Red/White (P/N 417223747)	Red/Red (P/N 417 223745)	
Ramp		716 (P/N 417223508)		725 (P/N 417223601)		
Ramp quantity		6				
Engagement RPM \pm 100		2200				
Maximum RPM \pm 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red (P/N 417127467)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		7.3kgf (16.1 lbf) (1-C)				
Cam angle (degrees)		41°-45° (P/N 417127747)				

**RENEGADE SPORT 600 ACE
GRAND TOURING SPORT 600 ACE**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Red (P/N 417 223745)	Red/Yellow (P/N 417 223748)	Red/Orange (P/N 417 223749)	Red/White (P/N 417223747)		Red/Red (P/N 417 223745)
Ramp	715 (P/N 417223510)			725 (P/N 417223601)		
Ramp quantity	6					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7300					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Red (P/N 417127467)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	7.3kgf (16.1 lbf) (1-C)					
Cam angle (degrees)	41°-45° (P/N 417127747)					

SKANDIC LE 600 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Red (P/N 417223745)	Red/White (P/N 417 223747)	Red/Red (P/N 417 223745)	Red/Yellow (P/N 417 223748)	Red/Orange (P/N 417 223749)
Ramp		716 (P/N 417223508)	725 (P/N 417223601)			
Ramp quantity		6				
Engagement RPM \pm 100		2200				
Maximum RPM \pm 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red (P/N 417127467)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		7.3kgf (16.1 lbf) (1-C)				
Cam angle (degrees)		41°-45° (P/N 417127747)				

900 ACE

EXPEDITION SPORT 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Yellow (P/N 417224329)		Red/Blue (P/N 417224330)		Blue/Purple (P/N 417224168)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM \pm 100		2200		2400		2600
Maximum RPM \pm 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		42° (P/N 417127420)				

EXPEDITION LE/ SE 20" 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)		Yellow/Yellow (P/N 417224171)		Blue/Blue (P/N 417224013)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM ± 100		2200		2800		3200
Maximum RPM ± 100		7500				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		42° (P/N 417127420)				

**GRAND TOURING SPORT/ LE/ PLATINUM 900 ACE
RENEGADE ADRENALINE/ ENDURO 900 ACE**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)				Blue/Purple (P/N 417224168)
Ramp		826 (P/N 417224370)		895 (P/N 417224256)		
Engagement RPM ± 100		2200		2400		2600
Maximum RPM ± 100		7250				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		42° (P/N 417127420)				

SKANDIC LE/ SE 20" 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)		Yellow/Yellow (P/N 417224171)		Blue/Blue (P/N 417224013)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM \pm 100		2200		2800		3200
Maximum RPM \pm 100		7250				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		42° - A (P/N 417127420)				

**EXPEDITION LE 24" 900 ACE
SKANDIC LE/ SE 24" 900 ACE**

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Yellow (P/N 417224329)		Yellow/Yellow (P/N 417224171)		Blue/Blue (P/N 417224013)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM ± 100		2200		2800		3200
Maximum RPM ± 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		42° - A (P/N 417127420)				

900 ACE TURBO

EXPEDITION LE/ SE 20" 900 ACE TURBO
EXPEDITION LE 24" 900 ACE TURBO

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Blue (P/N 417224330)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2100					
Maximum RPM \pm 100	7300					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° U (P/N 417127756)					

GRAND TOURING LE/ PLATINUM 900 ACE TURBO

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 417224165)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2700					
Maximum RPM \pm 100	7300					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue (P/N 417127118)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° U (P/N 417127756)					

RENEGADE ADRENALINE 900 ACE TURBO
RENEGADE ENDURO 900 ACE TURBO

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 417224165)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2700					
Maximum RPM \pm 100	7400					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° U (P/N 417127756)					

900 ACE TURBO R

EXPEDITION LE/ SE/ EXTREME 20" 900 ACE TURBO R
EXPEDITION LE 24" 900 ACE TURBO R

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Blue (P/N 417224330)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2100					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42° - 38° U (P/N 417127693)					

GRAND TOURING LE/ PLATINUM 900 ACE TURBO R

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Blue (P/N 417224330)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2100					
Maximum RPM \pm 100	7700					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° (P/N 417127756)					

RENEGADE ADRENALINE/ ENDURO/ X/ X-RS 900 ACE TURBO R

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

RENEGADE ADRENALINE/ ENDURO

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/White (P/N 417224167)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2700					
Maximum RPM \pm 100	7900					

RENEGADE X AND X-RS


	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/White (P/N 417224167)					
Ramp	039 (P/N 417225969)					
Calibration cam position		3		4		5
Mass	33 mm 15,2g (P/N 417224221)					
Engagement RPM \pm 100	3200					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° U (P/N 417127756)					

OPTIONAL DRIVE PULLEY SPRING RATES AND SPECIFICATIONS

The springs for TRA pulleys cannot be installed on eDrive II or eDrive II LC.

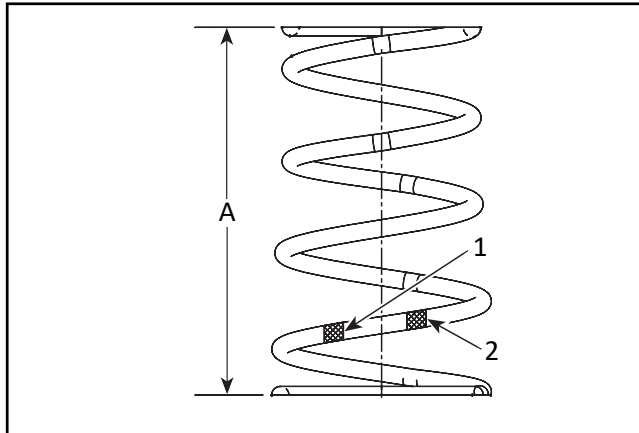

TYPICAL - COLOR CODE

1. 1st color
2. 2nd color

eDrive II (900 ACE) and eDrive II LC (600 ACE)

SPRING SPECIFICATIONS							
PART NUMBER	WIRE DIA.	FREE LENGHT	LOAD ± 10% WHEN "A" = 60.6 MM		LOAD ± 10% WHEN "A" = 28 MM		COLOR CODE
	MM		N	LBS	N	LBS	
417223745	4.50	97.9	356	80	667	150	Red / Red
417223747	4.30	108.0	356	80	600	135	Red / White
417223748	4.80	87.3	355	80	789	177	Red / Yellow
417223749	4.80	84.3	355	80	845	190	Red / Orange
417223750	5.0	80.5	355	80	934	210	Red / Green
417224084	4.50	105.4	489	110	845	190	Yellow / Pink
417224085	4.30	120.0	446	100	690	155	Yellow / Blue