



SERVICE BULLETIN



February 2023

Subject: High Altitude / Sea Level Specifications

No **2024-1**

[► REVISION 1
August, 2023 ◀](#)

► TEXT(S) BETWEEN ARROWS IS (ARE) MODIFIED ELEMENT(S) TO THE PREVIOUS PUBLICATION. ◀

MODEL YEAR	MODEL
2024	All Ski-Doo

TABLE OF CONTENTS

GENERAL INFORMATION.....5

 Previous Model Year Vehicles.....5

MXZ™ NEO 600 EFI.....7

 Drive Pulley7

 Driven Pulley7

SUMMIT NEO 600 EFI8

 Drive Pulley8

 Driven Pulley8

MXZ™ NEO+ 600 EFI.....9

 Drive Pulley9

 Driven Pulley9

SUMMIT NEO+ 600 EFI10

 Drive Pulley10

 Driven Pulley10

MXZ™ SPORT 600 EFI / RENEGADE SPORT 600 EFI.....11

 Drive Pulley.....11

 Driven Pulley11

BACKCOUNTRY SPORT 600 EFI..... 12

 Drive Pulley 12

 Driven Pulley..... 12

**EXPEDITION™ SPORT 600 EFI / SKANDIC SPORT/ LE 600
EFI / TUNDRA SPORT/ LE 600 EFI** 13

 Drive Pulley 13

 Driven Pulley..... 13

**EXPEDITION LE 20" 600R E-TEC / SKANDIC LE/ SE 20"
600R E-TEC**..... 14

 Drive Pulley 14

 Driven Pulley..... 14

**EXPEDITION LE 24" 600R E-TEC / SKANDIC LE/ SE 24"
600R E-TEC**..... 15

 Drive Pulley 15

 Driven Pulley..... 15

MXZ™ 129" ADRENALINE/ BLIZZARD/ X/ X-RS 600R E-TEC
..... 16

 Drive Pulley 16

 Driven Pulley..... 16

MXZ™ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-RS COMP 600R E-TEC / RENEGADE ENDURO 600R E-TEC ...	17	Chaincase Gears.....	25
Drive Pulley.....	17	FREERIDE 154" 850 E-TEC SEA-LEVEL (EUR) / SUMMIT 154" AND 165" 850 E-TEC SEA-LEVEL (EUR)	26
Driven Pulley	17	Drive Pulley	26
BACKCOUNTRY ADRENALINE 600R E-TEC.....	18	Driven Pulley.....	26
Drive Pulley.....	18	Vehicle Calibration	26
Driven Pulley	18	Chaincase Gears.....	26
Vehicle Calibration.....	18	SUMMIT 146" 850 E-TEC HIGH ALTITUDE	27
SUMMIT SP 146" AND 154" 600R E-TEC (CAN/USA).....	19	Drive Pulley	27
Drive Pulley.....	19	Driven Pulley	27
Driven Pulley.....	19	Vehicle Calibration	27
Vehicle Calibration.....	19	Chaincase Gears.....	28
SUMMIT SP 146" AND 154" 600R E-TEC (EUROPE).....	20	FREERIDE 154" AND 165" 850 E-TEC HIGH ALTITUDE / SUMMIT 154" AND 165" 850 E-TEC HIGH ALTITUDE	29
Drive Pulley.....	20	Drive Pulley	29
Driven Pulley.....	20	Driven Pulley	29
Vehicle Calibration.....	20	Vehicle Calibration	29
EXPEDITION SE/ Xtreme 850 E-TEC	21	Chaincase Gears.....	30
Drive Pulley.....	21	SUMMIT 175" 850 E-TEC HIGH ALTITUDE	31
Driven Pulley	21	Drive Pulley	31
FREERIDE 146" 850 E-TEC SEA-LEVEL (CAN/USA) / SUMMIT 146" 850 E-TEC SEA-LEVEL (CAN/USA)	22	Driven Pulley	31
Drive Pulley.....	22	Vehicle Calibration	31
Driven Pulley	22	Chaincase Gears.....	32
Vehicle Calibration.....	22	Driven Pulley.....	33
Chaincase Gears.....	22	Chaincase Gears.....	33
FREERIDE 146" 850 E-TEC SEA-LEVEL (EUR) / SUMMIT 146" 850 E-TEC SEA-LEVEL (EUR).....	23	► FREERIDE 154" 850 E-TEC TURBO R SEA LEVEL (EUR) / SUMMIT 154", 165" AND 175" 850 E-TEC TURBO R SEA LEVEL (EUR) ◀	34
Drive Pulley.....	23	Drive Pulley	34
Driven Pulley	23	Driven Pulley.....	34
Vehicle Calibration.....	23	► Chaincase Gears ◀	35
Chaincase Gears	23	► FREERIDE 154" AND 165" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA) / SUMMIT 154", 165" AND 175" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA) ◀	35
FREERIDE 154" AND 165" 850 E-TEC SEA-LEVEL (CAN/USA) / SUMMIT 154" AND 165" 850 E-TEC SEA- LEVEL (CAN/USA)	24	Drive Pulley	35
Drive Pulley.....	24	Driven Pulley	36
Driven Pulley	24	Vehicle Calibration	36
Vehicle Calibration.....	24	► Chaincase Gears ◀	36

MXZ 129" ADRENALINE/ BLIZZARD/ X/ X-RS 850 E-TEC	37
Drive Pulley.....	37
Driven Pulley.....	37
MXZ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-RS COMP 850 E-TEC / RENEGADE ENDURO 850 E-TEC	38
▶ MXZ 137" X-RS COMP 850 E-TEC TURBO R ◀	39
Drive Pulley.....	39
Driven Pulley.....	39
BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC	40
(Track with profile of 40 mm (1.6in)).....	40
Drive Pulley.....	40
Driven Pulley.....	40
Vehicle Calibration.....	40
Chaincase Gears.....	40
BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (CAN/USA)	41
Drive Pulley.....	41
Driven Pulley.....	41
Vehicle Calibration.....	42
Chaincase Gears.....	42
BACKCOUNTRY X-RS 850 E-TEC (EUR)	43
Drive Pulley.....	43
Driven Pulley.....	43
Vehicle Calibration.....	43
Chaincase Gears.....	43
EXPEDITION SPORT 600 ACE / TUNDRA SPORT/ LE 600 ACE	44
Drive Pulley.....	44
Driven Pulley.....	44
RENEGADE SPORT 600 ACE / GRAND TOURING SPORT 600 ACE	45
Drive Pulley.....	45
Driven Pulley.....	45
SKANDIC LE 600 ACE	46
Drive Pulley.....	46
Driven Pulley.....	46
EXPEDITION SPORT 900 ACE	47

Drive Pulley.....	47
Driven Pulley.....	47
EXPEDITION LE/ SE 20" 900 ACE	48
Drive Pulley.....	48
Driven Pulley.....	48
GRAND TOURING SPORT/ LE/ LUXURY 900 ACE/ RENEGADE ADRENALINE/ ENDURO 900 ACE	49
Drive Pulley.....	49
Driven Pulley.....	49
SKANDIC LE/ SE 20" 900 ACE	50
Drive Pulley.....	50
Driven Pulley.....	50
EXPEDITION LE 24" 900 ACE /	51
SKANDIC LE/ SE 24" 900 ACE	51
Drive Pulley.....	51
Driven Pulley.....	51
EXPEDITION LE/ SE 900 ACE TURBO/	52
SKANDIC SE 900 ACE TURBO	52
Drive Pulley.....	52
Driven Pulley.....	52
GRAND TOURING LE/ LUXURY 900 ACE TURBO	53
Drive Pulley.....	53
Driven Pulley.....	53
RENEGADE ADRENALINE 900 ACE TURBO / RENEGADE ENDURO 900 ACE TURBO	54
Drive Pulley.....	54
Driven Pulley.....	54
EXPEDITION LE/ SE/ EXTREME 900 ACE TURBO R	55
Drive Pulley.....	55
Driven Pulley.....	55
GRAND TOURING LE/ LUXURY 900 ACE TURBO R	56
Drive Pulley.....	56
Driven Pulley.....	56
RENEGADE ADRENALINE/ ENDURO/ X/ X-RS 900 ACE TURBO R	57
Drive Pulley.....	57
Driven Pulley.....	57

OPTIONAL DRIVE PULLEY SPRING RATES AND SPECIFICATIONS58

eDrive II (900 ACE) and eDrive II LC (600 ACE).....58

GENERAL INFORMATION

Previous Model Year Vehicles

This bulletin supplies all the information required to modify current year vehicles for high altitude and/or sea level riding.

MODEL YEAR	LATEST REVISION OF BULLETIN NO.
2024	2024-1
2023	2023-1
2022	2022-1
2021	2021-1
2020	2020-1

NOTE: Throughout this entire document, shaded areas give factory settings (that could apply through different altitudes) while N/A stands for “not applicable”.

NOTICE The following modifications and adjustments apply for high altitude operation as well as sea level operation.

PARTS AND LABOR COST ARE NOT COVERED BY BRP LIMITED WARRANTY.

Table Format

The shaded portions of the table indicate factory settings.

ALTITUDE	
Parts to be modified	Recommended Adjustment

Sea Level Calibration Kit (CAN/USA only)

When the high altitude calibration must be modified to sea level calibration on Freeride™ and Summit™ models (146" and up), the following kit may be used. This kit includes all required parts to set-up the vehicle.

MODEL	PART NUMBER
Freeride and Summit 850 E-TEC except turbo	
146", 154", 165", and 175"	860201905

Kit Description

SEA LEVEL CALIBRATION KIT (P/N 860201905)			
DESCRIPTION		PART NUMBER	QTY
Drive pulley	Ramp 990	417224326	3
	Weight	417224507	3
	Pivot 38 mm / 16,7 g	417224222	3
	Spring (Blue/Yellow)	417224015	1
	M14 Conical spring washer	250200144	1
Driven pulley	Spring (Black)	417127039	1

MXZ™ NEO 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Yellow (P/N 417224329)			Blue/Purple (P/N 417224168)	
Ramp		885 (P/N 417224729)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			4	
Mass		N/A			26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100		2500				
Maximum RPM \pm 100		6500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

SUMMIT NEO 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)			Purple/White (P/N 417224167)	
Ramp		885 (P/N 417224729)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			4	
Mass		N/A			26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100		2500				
Maximum RPM ± 100		6500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

MXZ™ NEO+ 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Orange (P/N 417224328)			Blue/Blue (P/N 417224013)	
Ramp		885 (P/N 417224729)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			3	
Mass		N/A			33 mm/15.2 g (P/N 417224221)	
Engagement RPM ± 100		2500				
Maximum RPM ± 100		6500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224221), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

SUMMIT NEO+ 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Orange (P/N 417224328)			Blue/Purple (P/N 417224168)	
Ramp		885 (P/N 417224729)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			3	
Mass		N/A			33 mm/15.2 g (P/N 417224221)	
Engagement RPM ± 100		2500				
Maximum RPM ± 100		6500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224221), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Brown (P/N 417127061)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

MXZ™ SPORT 600 EFI / RENEGADE SPORT 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Blue (P/N 417224013)			Purple/Blue (P/N 417224165)	
Ramp		886 (P/N 417224688)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			4	5
Mass		N/A			26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100		3200			3500	
Maximum RPM ± 100		7500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Green (P/N 417127137)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)				

BACKCOUNTRY SPORT 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Yellow (P/N 417224015)			Purple/Blue (P/N 417224165)	
Ramp		886 (P/N 417224688)			972 (P/N 417224268) ¹	
Calibration cam position		N/A			4	5
Mass		N/A			26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100		3200			3500	
Maximum RPM ± 100		7500				
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Black (P/N 417127039)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		40° XTI (P/N 417127672)				

EXPEDITION™ SPORT 600 EFI / SKANDIC SPORT/ LE 600 EFI / TUNDRA SPORT/ LE 600 EFI

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Yellow (P/N 417224171)			Blue/Blue (P/N 417224013)		
Ramp	887 (P/N 417224690)			972 (P/N 417224268) ¹		
Calibration cam position	N/A			4	5	
Mass	N/A			26 mm/13,1 g (P/N 417224220)		
Engagement RPM ± 100	2300			3100		
Maximum RPM ± 100	7500					
¹ Parts required to complete the clicker assembly: Cam (P/N 417224113), mass (P/N 417224220), levers (P/N 417224114) and (P/N 417224086). Adjust calibration cam as per table						

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

EXPEDITION LE 20" 600R E-TEC / SKANDIC LE/ SE 20" 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Blue (P/N 417224172)					
Ramp	971 (P/N 417224266)			972 (P/N 417224268)		
Calibration cam position	3	4	5	3	4	5
Mass	26 mm/13,1 g (P/N 417224220)					
Engagement RPM \pm 100	3400			2900		
Maximum RPM \pm 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

EXPEDITION LE 24" 600R E-TEC / SKANDIC LE/ SE 24" 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Yellow/Blue (P/N 417227172)					
Ramp	971 (P/N 417224266)			972 (P/N 417224268)		
Calibration cam position	4	5		4	5	
Mass	38 mm/16,7 g (P/N 417224222) + 2 mm (P/N 417224363)			38 mm/16,7 g (P/N 417224222)		
Engagement RPM ± 100	3400			2800		
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

MXZ™ 129"ADRENALINE/ BLIZZARD/ X/ X-RS 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Blue (P/N 417224013)			Purple/Purple (P/N 417224166)		
Ramp	901 (P/N 417224626)			967 (P/N 417224225)		
Calibration cam position	3	4	5	4	5	
Mass	33 mm/15.2 g (P/N 417224221)			26 mm/13.1 g (P/N 417224220)		
Engagement RPM ± 100	3400			4000		
Maximum RPM ± 100	8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	44° (P/N 417127367)					

MXZ™ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-RS COMP 600R E-TEC / RENEGADE ENDURO 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Blue (P/N 417224013)			Purple/Purple (P/N 417224166)	
Ramp		901 (P/N 417224626)			967 (P/N 417224225)	
Calibration cam position		3	4	5	4	5
Mass		33 mm/15,2 g (P/N 417224221)			26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100		3400			4000	
Maximum RPM ± 100		8100				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Green (P/N 417127137)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° (P/N 417127367)			43° - 47° (P/N 417127371)	

BACKCOUNTRY ADRENALINE 600R E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Spring		Purple/White (P/N 417224167)			Blue/Purple (P/N 417224168)		
Ramp		901 (P/N 417224626)			997 (P/N 417224430)		
Calibration cam position		3	4	5	3	4	5
Mass		38 mm/16,7 g (P/N 417224222)			33 mm/15,2 g (P/N 417224221)		
Engagement RPM ± 100		3400					
Maximum RPM ± 100		8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Black (P/N 417127039)			Blue (P/N 417127118)	
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		46° - 42° XTI (P/N 417127426)				

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

SUMMIT SP 146" AND 154" 600R E-TEC (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Purple/White (P/N 417224167)			Blue/Purple (P/N 417224168)	
Ramp		901 (P/N 417224626)			997 (P/N 417224430)	
Calibration cam position		3	4	5	3	4 5
Mass		38 mm/16,7 g (P/N 417224222)			33 mm/15,2 g (P/N 417224221)	
Engagement RPM \pm 100		3400				
Maximum RPM \pm 100		8100				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Black (P/N 417127039)			Blue (P/N 417127118)	
Spring tension Kg \pm 0.7 (lb \pm 1.5)		N/A				
Cam angle (degrees)		46° - 42° XTI (P/N 417127715)				

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

SUMMIT SP 146" AND 154" 600R E-TEC (EUROPE)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Spring		Purple/White (P/N 417224167)			Blue/Purple (P/N 417224168)		
Ramp		901 (P/N 417224626)			997 (P/N 417224430)		
Calibration cam position		3	4	5	3	4	5
Mass		38 mm/16,7 g (P/N 417224222)			33 mm/15,2 g (P/N 417224221)		
Engagement RPM ± 100		3400					
Maximum RPM ± 100		8100					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Black (P/N 417127039)			Blue (P/N 417127118)	
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		46° - 42° XTI (P/N 417127426)				

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

EXPEDITION SE/ Xtreme 850 E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)					
Ramp	982 (P/N 417224575)			904 (P/N 417224646)		
Calibration cam position	3	4	2	3	4	5
Mass	38 mm/ 16,7g (P/N 417224222) + 2 mm (P/N 417224363)			26 mm/13,1 g (P/N 417224220)		
Engagement RPM \pm 100	3800			2900		
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42° - 40° (P/N 417127430)					

FREERIDE 146" 850 E-TEC SEA-LEVEL (CAN/USA) / SUMMIT 146" 850 E-TEC SEA-LEVEL (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3800			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42°-38° XTI (P/N 417127693)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

Chaincase Gears

146" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		21 (P/N 504153910)				
Lower gear		49 (P/N 504154109)				
Chain		114 (P/N 504153393)				

FREERIDE 146" 850 E-TEC SEA-LEVEL (EUR) / SUMMIT 146" 850 E-TEC SEA-LEVEL (EUR)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	3	4	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3800			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44°-42° XTI (P/N 417127825)		40° XTI (P/N 417127672)			

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

Chaincase Gears

146" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear		21 (P/N 504153910)				
Lower gear		51 (P/N 504154110)				
Chain		116 (P/N 504153397)				

FREERIDE 154" AND 165" 850 E-TEC SEA-LEVEL (CAN/USA) / SUMMIT 154" AND 165" 850 E-TEC SEA-LEVEL (CAN/USA)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/16,7 g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3800			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

Chaincase Gears

154" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear	21 (P/N 504153910)					
Lower gear	51 (P/N 504154110)					
Chain	116 (P/N 504153397)					

165" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear	21 (P/N 504153910)					
Lower gear	53 (P/N 504154214)					
Chain	116 (P/N 504153397)					

FREERIDE 154" 850 E-TEC SEA-LEVEL (EUR) / SUMMIT 154" AND 165" 850 E-TEC SEA-LEVEL (EUR)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	3	4	3	4	5	
Mass	38 mm/16,7 g (P/N 417224222)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3800			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	44°-42° XTI (417127825)		40° XTI (P/N 417127672)			

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

Chaincase Gears

154" AND 165" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear		21 (P/N 504153910)				
Lower gear		53 (P/N 504153998)				
Chain		116 (P/N 504153397)				

SUMMIT 146" 850 E-TEC HIGH ALTITUDE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM \pm 100	3300		3600			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	42°-38° XTI (P/N 417127693)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap	6		4			

Chaincase Gears

146" MODELS						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	51 (P/N 504153997)					
Chain	116 (P/N 504153397)					

Sea Level Calibration Kit

MODEL	PART NUMBER
146"	860201905

FREERIDE 154" AND 165" 850 E-TEC HIGH ALTITUDE / SUMMIT 154" AND 165" 850 E-TEC HIGH ALTITUDE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)			26 mm/13,1 g (P/N 417224220)
Engagement RPM \pm 100	3300		3600			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap	6		4			

Chaincase Gears

154" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	51 (P/N 504154110)					
Chain	116 (P/N 504153397)					

165" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	53 (P/N 504154214)					
Chain	116 (P/N 504153397)					

Sea Level Calibration Kit

MODEL	PART NUMBER
154" and 165"	860201905

SUMMIT 175" 850 E-TEC HIGH ALTITUDE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Purple/White (P/N 417224167)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/ 16,7g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3900			
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap	6		4			

Chaincase Gears

175" MODELS						
SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Upper gear	21 (P/N 504153910)					
Lower gear	53 (P/N 504154214)					
Chain	116 (P/N 504153397)					

Sea Level Calibration Kit

MODEL	PART NUMBER
175"	860201905

► FREERIDE 146" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA) ◀

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/purple 170-350 (417224166)					Purple/Yellow (P/N 417224164)
Ramp	951 (P/N 417224038)		761 (P/N 417224761)			903 (P/N 417224642)
Calibration cam position	3	2	3			4
Mass	► 38H mm/ (P/N 417224806) +14 mm (P/N 417224241) ◀	► 38 mm/ (P/N 417224222) +2 mm (P/N 417224363) ◀	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)	33 mm/15,2 g (P/N 417224221)		► 38 mm (P/N 417224222) + 2 mm (P/N 417224363) ◀
Engagement RPM ± 100	3800					
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Chaincase Gears

146" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	► 22BW (P/N 504154809) ◀					
Lower gear	► 51BW (P/N 504154824) ◀					
Chain	► 116BW (P/N 504153759) ◀					

► **FREERIDE 154" 850 E-TEC TURBO R SEA LEVEL (EUR) / SUMMIT 154", 165" AND 175" 850 E-TEC TURBO R SEA LEVEL (EUR)** ◀

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Blue/Yellow (P/N 417224015)		Purple/Purple (P/N 417224166)		Purple/Yellow (P/N 417224164)
Ramp		951 (P/N 417224038)		761 (P/N 417224761)		903 (P/N 417224642)
Calibration cam position		2		3		4
Mass		33 mm/15,2 g (P/N 417 224221)	► 26 mm (P/N 417 224115) ◀	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)	33 mm/15,2 g (P/N 417224221)	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)
Engagement RPM ± 100		3400				
Maximum RPM ± 100		7900				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Black (P/N 417127039)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		40° XTI (P/N 417127672)				

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6		4		

► **Chaincase Gears** ◀

154", 165" AND 175" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	► 21BW (P/N 504154188) ◀					
Lower gear	► 53BW (P/N 504154823) ◀					
Chain	► 116BW (P/N 504153759) ◀					

► **FREERIDE 154" AND 165" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA) / SUMMIT 154", 165" AND 175" 850 E-TEC TURBO R HIGH ALTITUDE (CAN/USA)**



Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Purple (P/N 417224166)					Purple/Yellow (P/N 417224164)
Ramp	951 (P/N 417224038)		761 (P/N 417224761)			903 (P/N 417224642)
Calibration cam position	3	2	3			4
Mass	38H mm/ 19,5g (P/N 417224 806) + 14 mm (P/N 417224 241)	38 mm/ 16,7g (P/N 417224 222) + 2 mm (P/N 417224 363)	33 mm/15,2 g (P/N 417224221) + 2 mm (P/N 417224363) + 3 mm (P/N 417224364)	33 mm /15,2 g (P/N 417 224221)		38 mm/ 16,7g (P/N 417224222) + 2 mm (P/N 417224363)
Engagement RPM ± 100	3800					
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		6			4	

► Chaincase Gears ◀

154", 165" AND 175" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	► 22BW (P/N 504154809) ◀	► 21BW (P/N 504154188) ◀				
Lower gear	► 53BW (P/N 504154823) ◀					
Chain	► 116BW (P/N 504153759) ◀					

MXZ 129" ADRENALINE/ BLIZZARD/ X/ X-RS 850 E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Blue (P/N 417224013)		Blue/Yellow (P/N 417224015)			
Ramp	968 (P/N 417224227)		967 (P/N 417224225)			
Calibration cam position	3	4	2	3	4	5
Mass	38 mm/ 16,7g (P/N 417224222)					
Engagement RPM \pm 100	3200		4000			
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	45° - 42° (P/N 417127534)					

MXZ 137" ADRENALINE/ BLIZZARD/ X/ X-RS/ X-RS COMP 850 E-TEC / RENEGADE ENDURO 850 E-TEC

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)	
Spring		Yellow/Blue (P/N 417224172)		Yellow/Yellow (P/N 417224171)			
Ramp		968 (P/N 417224227)		967 (P/N 417224225)			
Calibration cam position		3	4	2	3	4	5
Mass		38 mm/ 16,7g (P/N 417224222)					
Engagement RPM ± 100		2900		3400			
Maximum RPM ± 100		7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Green (P/N 417127137)				
Spring tension Kg ± 0.7 (lb ± 1.5)		N/A				
Cam angle (degrees)		44° - 42° (P/N 417127325)				

▶ MXZ 137" X-RS COMP 850 E-TEC TURBO R ◀

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	▶ Purple 170/350 (P/N 417224166) ◀		▶ Purple/Blue 170/300 (P/N 417224165) ◀			
Ramp	978		▶ 984 ◀			
Calibration cam position	3	4	▶ 2 ◀		▶ 3 ◀	
Mass	▶ 33 mm (P/N 417224221) + 2 mm (P/N 417224363) + 4 mm (P/N 417224365) ◀			▶ 33 mm (P/N 417224221) ◀		
Engagement RPM ± 100	▶ 4100 ◀					
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	47° - 44°					

▶ Chaincase Gears ◀

137" MODELS						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	▶ 27 (P/N 504193913) ◀					
Lower gear	▶ 49 (P/N 504153917) ◀					
Chain	▶ 112 (P/N 504153268) ◀					

BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC

(Track with profile of 40 mm (1.6 in))

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		995 (P/N 417224450)			
Calibration cam position	4	5	3			4
Mass	38 mm/16,7 g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3800			
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	42° - 38° XTI (P/N 417127693)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

WITH 1.6" PROFILE TRACK						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Upper gear	21 (P/N 504153910)					
Lower gear	45 (P/N 504154108)					
Chain	112 (P/N 504153268)					

BACKCOUNTRY ADRENALINE/ X/ X-RS 850 E-TEC (CAN/USA)

(Track with profile of 50 mm (2 in) and 63 mm (2-1/2 in))

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		965 (P/N 417224141)			
Calibration cam position	4	5	3	4	5	
Mass	38 mm/16,7 g (P/N 417224222) + 9 mm (P/N 417224507)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3800			
Maximum RPM ± 100	7900					

Driven Pulley

146" MODELS						
	SEA LEVEL 0 M (0 FT)	600 m (2000 FT)	1200 m (4000 FT)	1800 m (6000 FT)	2400 m (8000 FT)	3000 m (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	42° - 38° XTI (P/N 417127693)					

154" MODELS						
	SEA LEVEL 0 M (0 FT)	600 m (2000 FT)	1200 m (4000 FT)	1800 m (6000 FT)	2400 m (8000 FT)	3000 m (10000 FT)
Spring	Black (P/N 417127039)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	40° XTI (P/N 417127672)					

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

WITH 2" PROFILE TRACK						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear		23 (P/N 504153911)				
Lower gear		51 (P/N 504154110)				
Chain		116 (P/N 504153397)				

WITH 2.5" PROFILE TRACK						
	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear		21 (P/N 504153910)				
Lower gear		51 (P/N 504154110)				
Chain		116 (P/N 504153397)				

BACKCOUNTRY X-RS 850 E-TEC (EUR)

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue/Yellow (P/N 417224015)		Blue/Purple (P/N 417224168)			
Ramp	990 (P/N 417224326)		995 (P/N 417224450)			
Calibration cam position	3	4	3	4	5	
Mass	38 mm/16,7 g (P/N 417224222)		33 mm/15,2 g (P/N 417224221)		26 mm/13,1 g (P/N 417224220)	
Engagement RPM ± 100	3300		3800			
Maximum RPM ± 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)		Blue (P/N 417127118)			
Spring tension Kg ± 0.7 (lb ± 1.5)	N/A					
Cam angle (degrees)	44° - 42° XTI (P/N 417127825)		42° - 38° XTI (P/N 417127693)			

Vehicle Calibration

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Stopper Strap		4		3		2

Chaincase Gears

WITH 2" AND 2.5" PROFILE TRACK						
	Sea level 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M FT
Upper gear	21 (P/N 504153910)					
Lower gear	51 (P/N 504152971)					
Chain	116 (P/N 504153397)					

EXPEDITION SPORT 600 ACE / TUNDRA SPORT/ LE 600 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Red (P/N 417223745)	Red/Yellow (P/N 417 223748)	Red/White (P/N 417223747)	Red/Red (P/N 417 223745)	
Ramp		716 (P/N 417223508)		725 (P/N 417223601)		
Ramp quantity		6				
Engagement RPM \pm 100		2200				
Maximum RPM \pm 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red (P/N 417127467)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		7.3kgf (16.1 lbf) (1-C)				
Cam angle (degrees)		41°-45° (P/N 417127747)				

RENEGADE SPORT 600 ACE / GRAND TOURING SPORT 600 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Red (P/N 417 223745)	Red/Yellow (P/N 417 223748)	Red/Orange (P/N 417 223749)	Red/White (P/N 417223747)		Red/Red (P/N 417 223745)
Ramp	715 (P/N 417223510)			725 (P/N 417223601)		
Ramp quantity	6					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7300					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Red (P/N 417127467)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	7.3kgf (16.1 lbf) (1-C)					
Cam angle (degrees)	41°-45° (P/N 417127747)					

SKANDIC LE 600 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Red (P/N 417223745)	Red/White (P/N 417 223747)	Red/Red (P/N 417 223745)	Red/Yellow (P/N 417 223748)	Red/Orange (P/N 417 223749)
Ramp		716 (P/N 417223508)	725 (P/N 417223601)			
Ramp quantity		6				
Engagement RPM \pm 100		2200				
Maximum RPM \pm 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red (P/N 417127467344)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		7.3 kgf (16.1 lbf) (1-C)				
Cam angle (degrees)		41°-45° (P/N 417127747)				

EXPEDITION SPORT 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)				Blue/Purple (P/N 417224168)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM \pm 100		2200		2400		2600
Maximum RPM \pm 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Beige2 (P/N 417127242)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		7.0kg (15.4lb) (2-E)				
Cam angle (degrees)		42° (P/N 417127420)				

EXPEDITION LE/ SE 20" 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)		Yellow/Yellow (P/N 417224171)		Blue/Blue (P/N 417224013)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM ± 100		2200		2800		3200
Maximum RPM ± 100		7250				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Beige2 (P/N 417127242)				
Spring tension Kg ± 0.7 (lb ± 1.5)		7.0kg (15.4lb) (2-E)				
Cam angle (degrees)		42° (P/N 417127420)				

GRAND TOURING SPORT/ LE/ LUXURY 900 ACE/ RENEGADE ADRENALINE/ ENDURO 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)				Blue/Purple (P/N 417224168)
Ramp		826 (P/N 417224370)		895 (P/N 417224256)		
Engagement RPM \pm 100		2200		2400		2600
Maximum RPM \pm 100		7250				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red (P/N 417127467)				
Spring tension Kg \pm 0.7 (lb \pm 1.5)		7.3kg - 6.6kg (16.1lb - 14.6lb)				
Cam angle (degrees)		44° - 40° (P/N 417127476)				

SKANDIC LE/ SE 20" 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Blue (P/N 417224330)		Yellow/Yellow (P/N 417224171)		Blue/Blue (P/N 417224013)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM ± 100		2200		2800		3200
Maximum RPM ± 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Beige (P/N 417127242)				
Spring tension Kg ± 0.7 (lb ± 1.5)		7.0 kg - 6.4 kg (15.4 lb - 14.1 lb) (2-E)				
Cam angle (degrees)		42° - A (P/N 417127420)				

EXPEDITION LE 24" 900 ACE /

SKANDIC LE/ SE 24" 900 ACE

Drive Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Red/Yellow (P/N 417224329)		Yellow/Yellow (P/N 417224171)		Blue/Blue (P/N 417224013)
Ramp		882 (P/N 417224495)		895 (P/N 417224256)		
Engagement RPM ± 100		2200		2800		3200
Maximum RPM ± 100		7300				

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring		Beige2 (P/N 417127224)				
Spring tension Kg ± 0.7 (lb ± 1.5)		7.0 kg - 6.4 kg (15.4 lb - 14.1 lb) (2-E)				
Cam angle (degrees)		42° - A (P/N 417127420)				

EXPEDITION LE/ SE 900 ACE TURBO/

SKANDIC SE 900 ACE TURBO

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Blue (P/N 417224330)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7400					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° (P/N 417127756)					

GRAND TOURING LE/ LUXURY 900 ACE TURBO

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 417224165)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2700					
Maximum RPM \pm 100	7300					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Blue (P/N 417127118)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° (P/N 417127756)					

RENEGADE ADRENALINE 900 ACE TURBO / RENEGADE ENDURO 900 ACE TURBO

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/Blue (P/N 417224165)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2700					
Maximum RPM \pm 100	7400					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° (P/N 417127756)					

EXPEDITION LE/ SE/ EXTREME 900 ACE TURBO R

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Blue (P/N 417224330)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° (P/N 417127756)					

GRAND TOURING LE/ LUXURY 900 ACE TURBO R

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Red/Blue (P/N 417224330)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	2200					
Maximum RPM \pm 100	7700					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° (P/N 417127756)					

RENEGADE ADRENALINE/ ENDURO/ X/ X-RS 900 ACE TURBO R

Drive Pulley

NOTE: The factory calibration is suitable for all altitudes. The turbocharger compensates for the lack of oxygen at high altitude.

RENEGADE ADRENALINE/ ENDURO

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/White (P/N 417224167)					
Ramp	880 (P/N 417224290)					
Engagement RPM \pm 100	3200					
Maximum RPM \pm 100	7900					

RENEGADE X AND X-RS


	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Purple/White (P/N 417224167)					
Ramp	039 (P/N 417225969)					
Calibration cam position		3		4		5
Mass	33 mm 15,2g (P/N 417224221)					
Engagement RPM \pm 100	3200					
Maximum RPM \pm 100	7900					

Driven Pulley

	SEA LEVEL 0 M (0 FT)	600 M (2000 FT)	1200 M (4000 FT)	1800 M (6000 FT)	2400 M (8000 FT)	3000 M (10000 FT)
Spring	Green (P/N 417127137)					
Spring tension Kg \pm 0.7 (lb \pm 1.5)	N/A					
Cam angle (degrees)	47° - 40° (P/N 417127756)					

OPTIONAL DRIVE PULLEY SPRING RATES AND SPECIFICATIONS

The springs for TRA pulleys cannot be installed on eDrive II or eDrive II LC.

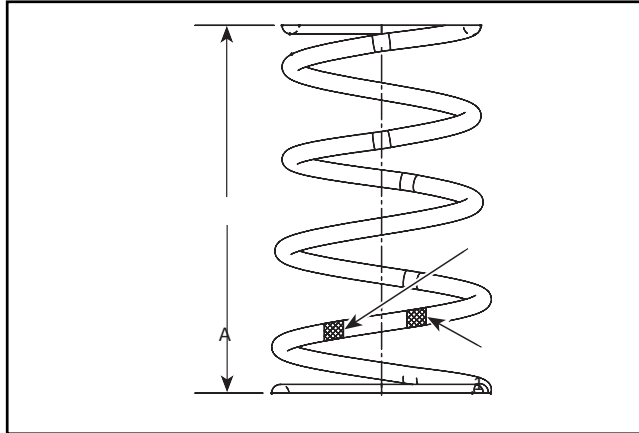

TYPICAL - COLOR CODE

1. 1st color
2. 2nd color

eDrive II (900 ACE) and eDrive II LC (600 ACE)

SPRING SPECIFICATIONS							
PART NUMBER	WIRE DIA.	FREE LENGHT	LOAD \pm 10% WHEN "A" = 60.6 MM		LOAD \pm 10% WHEN "A" = 28 MM		COLOR CODE
	MM		N	LBS	N	LBS	
417223745	4.50	97.9	356	80	667	150	Red / Red
417223747	4.30	108.0	356	80	600	135	Red / White
417223748	4.80	87.3	355	80	789	177	Red / Yellow
417223749	4.80	84.3	355	80	845	190	Red / Orange
417223750	5.0	80.5	355	80	934	210	Red / Green
417224084	4.50	105.4	489	110	845	190	Yellow / Pink
417224085	4.30	120.0	446	100	690	155	Yellow / Blue