



**2026
CATALOG**

ALLGEAR
UNLEASH YOUR CLIMBING AND RIGGING SKILLS



ALL GEAR, INC.
3021 COMMERCIAL AVE, NORTHBROOK, IL 60062

© COPYRIGHT 2025, ALL GEAR, INC.
USA | IMAGERY BY KAREN LANE



TABLE OF CONTENTS

ROPE

ROPE OVERVIEW	9
ROPE GUIDE.....	10
CLIMBING LINES	14
RIGGING LINES	22

ARBORIST

ASCENT AND DESCENT	28
CARABINERS	33
LANYARDS & FLIPLINES.....	34
RIGGING.....	41
SLINGS.....	42
THROW LINES & THROW WEIGHTS	50

KITS

KITS.....	53
-----------	----

UTILITIES & CRANES

CORDAGE.....	55-57
SLINGS.....	57

MISC.

ITEMS	59
-------------	----

25+ YEARS

OUR FUTURE

Innovation in At-Height Solutions

The best gear is safe and consistent—available when and where you need it. For over 28 years, All Gear, Inc. has been that reliable brand, available locally, but embraced by at-height professionals around the world.

We stand by our products and workmanship. Through integrity, performance, and the voice of the customer, All Gear and our network of dealers are committed to exceeding the demands of working professionals.

Powered by RBI, All Gear is reaching new heights, scaling our product offering, all while reinforcing our commitment to serving professionals through the dealer in their backyard. Can't find us in your local market? Contact us and we will come to you.


All Gear remains steadfast in our mission: high-performing, innovative gear, available through a trusted network. Whether you are familiar with All Gear or searching for a new partner, through these principles, we hope to work with every climber, dealer, and manufacturer.





IMAGERY BY KAREN LANE

CUSTOM SHOP

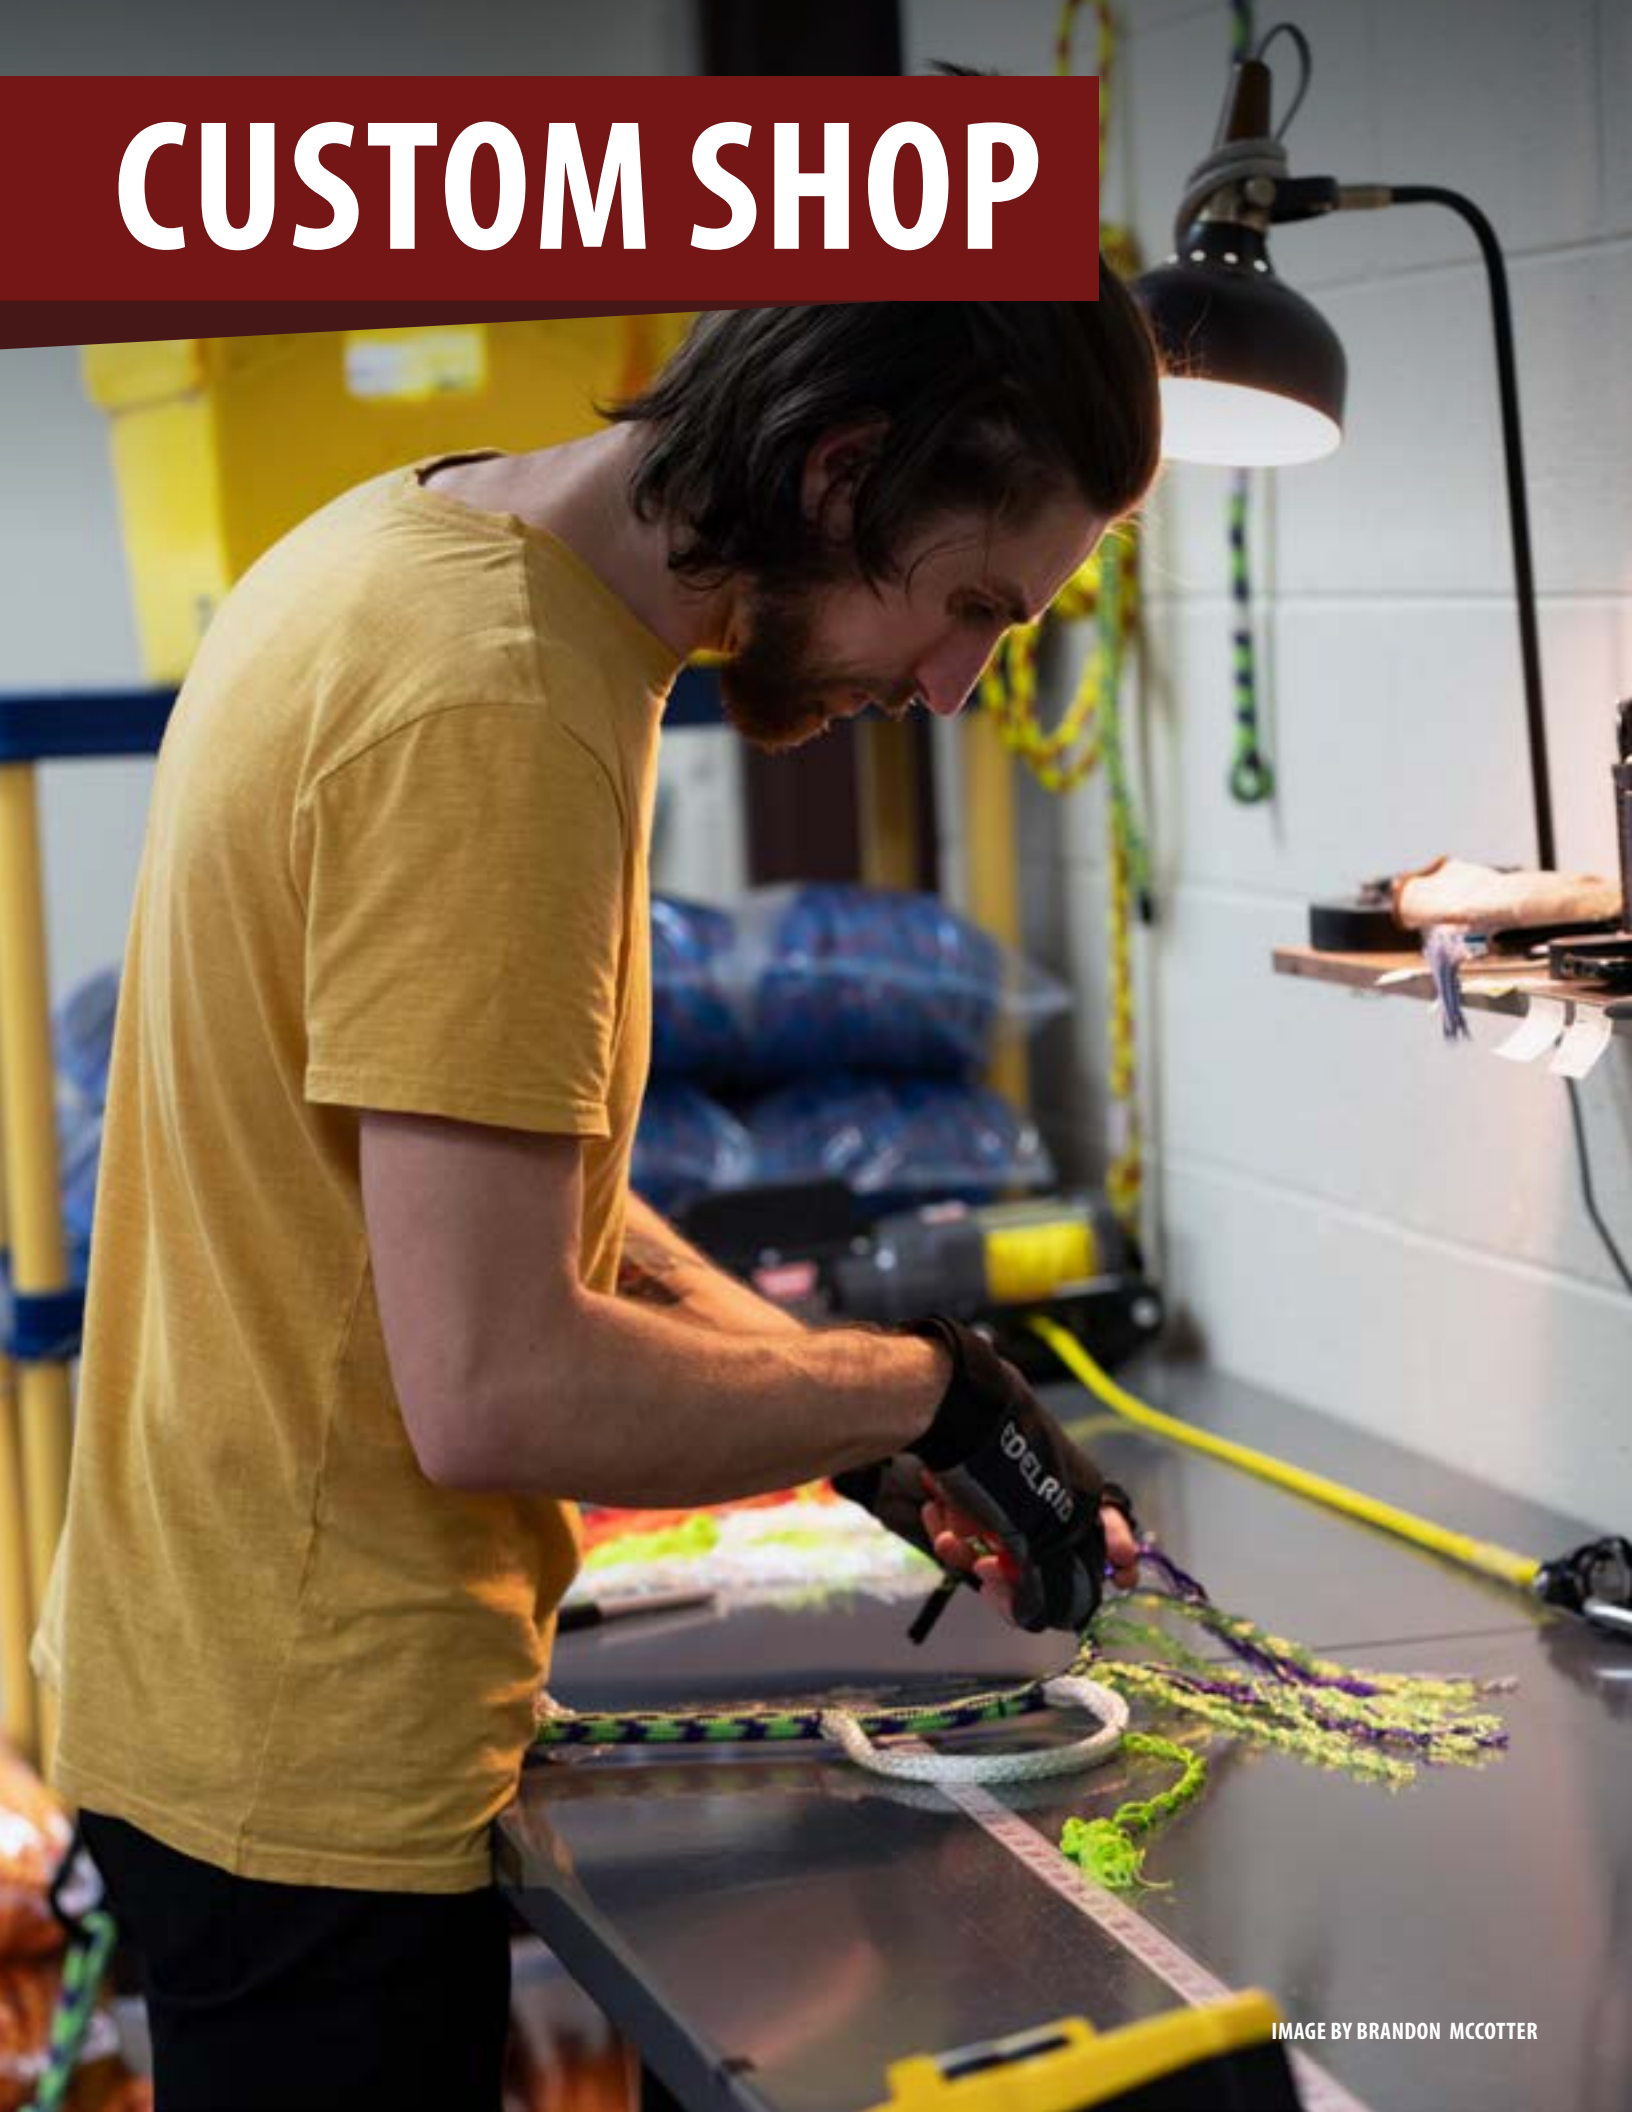

GEAR DESIGNED FOR YOU

We are passionate about creating solutions for the safety and success of every professional who work at-height. In this catalog, you'll find the 2026 product line with which we deliver on that mission.

BEYOND THE CATALOG

The nature of work at-height requires safety gear as unique as the pro and the situation they operate. All Gear is proud to serve the arborist, utility, and cellular industries through its products and services which meet their varying demands.

Enter the All Gear Custom Shop. Does your company want to develop and standardize lanyards? Are you onboarding Scannable? Custom fabrication becomes essential when the right gear empowers your company to grow.

Contact us today to develop tailored products and business solutions.

OEM SERVICES & SOLUTIONS

Much of the value All Gear brings to market is through our commitment to a local dealer network and a close collaboration with the best at-height manufacturers. All Gear offers value-added services, which are utilized by both end users, national at-height companies, and OEMs alike.

Leading rope brands across the industry certify the All Gear splicing team. Spliced (and sewn) terminations may be added to All Gear or OEM rope, prusiks, and hardware to meet both customer specifications and industry standards. We honor and respect this charge, which is why the All Gear Custom Shop was born.

If you are a manufacturer interested in collaborating, please contact us.

INDUSTRY INNOVATION

All Gear invests in the features and supply network required by tomorrow's at-height community. We focus on staying ahead of industry gear demands, through:

- Integrating the latest components in our Custom Shop products
- Scannable in all spliced ropes by Spring 2026
- Company-specific gear standardization and customization
- Dealer merchandising and local availability



*Proudly offering Scannable,
beginning in Spring 2026.*

01 ROPE

ROPE OVERVIEW	9
ROPE GUIDE	10
CLIMBING LINES	14
RIGGING LINES	22

24-STRAND
CLIMBING LINE
PURPLE HAZE
IMAGERY BY KAREN LANE

OUR ROPE

YOUR LIFELINE

The All Gear brand has been trusted for over 25 years by professionals and the dealers who serve them. Our ropes, rope products, slings, and hardware all meet or exceed ANSI-rated requirements.

SPLICING AND SEWING

In today's world of ever-changing systems, devices and preferences, one's decision in how a rope end is terminated is almost as important as the rope choice itself. All Gear operates two U.S. facilities, with splicers certified in most industry-leading rope brands.

Whether your customer is a seasoned climber with a specific request, or a national company looking to standardize gear, the All Gear Custom Shop can make it a reality.



ROPE GUIDE

The following pages provide the specifications and metrics associated with All Gear climbing and rigging ropes.

The guide does not recommend the application of All Gear ropes, but instead provides clarity on the particular metrics from which users can make determinations.


ROPE GUIDE

WARNING: This guide is designed for **GENERAL REFERENCE ONLY.**

The construction comparisons assume using the same rope fiber and size. Expert advice should be sought when choosing a where protection of life or property is involved.

ROPE CONSTRUCTION

CHARACTERISTICS	SOLID	HOLLOW	DOUBLE	DIAMOND	TWISTED	PLAITED
Number of strands or carriers	9, 12, or 18	8, 12, or 16	16, 20, 24, or 32	8, 12, or 6	3	8
Spliceable	No	Yes	Yes	No	Yes	Yes
Strength to weight (1-Best, 5-Poorest)	5	1	2	4	3	3
Flexibility (1-Best, 5-Poorest)	3	1	2	4	5	3
Flattens under load	No	Yes	No	Yes	No	No
Rotates under load	No	No	No	No	Yes	No
Mechanical elongation (1-High, 5-Low)	1	4	5	3	2	3
Cost per size	2	4	1	3	5	5
Working Load (% of tensile)	5–20%	5–20%	5–20%	5–20%	5–20%	5–20%
Abrasion resistance (1-Best, 5-Poorest)	1	5	2	3	4	3

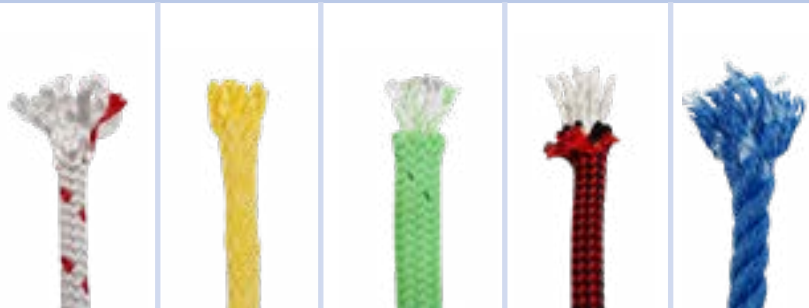

ROPE FIBER


FIBER TYPE	NYLON	POLYESTER	POLYPROPYLENE	MANILA	COTTON
Strength (1-Best, 5-Poorest)	1	2	3	4	5
Wet Strength vs Dry Strength	85%	100%	100%	115%	115%
Shock Load Ability (1-Best, 5-Poorest)	1	3	2	4	5
Elongation at Break (approx.)	Sinks	Sinks	Floats	Sinks	Sinks
Floats or Sinks in Water	20–34%	15–20%	15–20%	10–15%	5–10%
Water Absorption	6%	<1%	Zero	100%	100%
Melting Point	480 F	500 F	330 F	Does not melt (Chars at 350 F)	Does not melt (Chars at 300 F)
Abrasion Resistance (1-Best, 5-Poorest)	2	1	4	3	5
Resistance to Sunlight	Good	Excellent	Poor	Good	Good
Resistance to Rot	Excellent	Excellent	Excellent	Poor	Poor
Resistance to Acids	Poor	Good	Good	Poor	Poor
Resistance to Alkalis	Good	Poor	Good	Poor	Poor
Resistance to Oil & Gas	Good	Good	Good	Poor	Poor
Electrical Conductivity Resistance	Poor	Good	Good	Poor	Poor
Flexing Endurance (1-Best, 5-Poorest)	1	2	3	4	5
Specific Gravity	1.14	1.38	.90	1.38	1.54
Storage Requirements	Wet or Dry	Wet or Dry	Wet or Dry	Dry Only	Dry Only



1/2" RAGING BLUE BULL ROPE
IMAGERY BY KAREN LANE

ROPE GUIDE

ROPE DIAMETER CONVERSION CHART

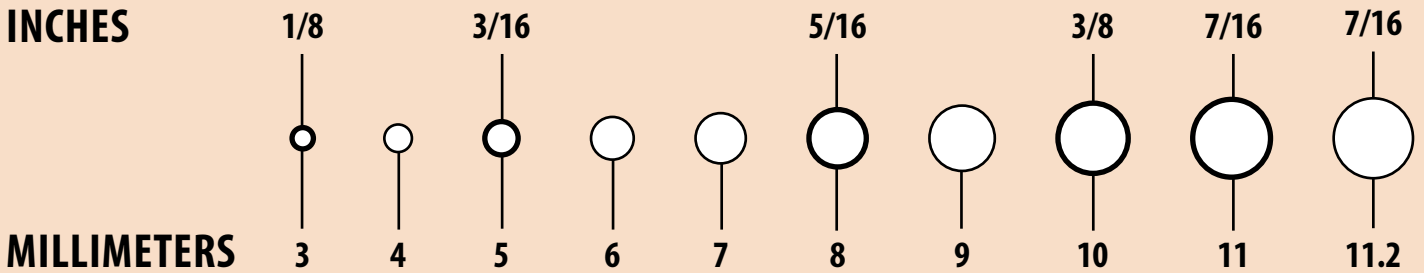

ROPE COMPARISONS

CLIMBING LINES

CLIMBING LINES

SKU	DESCRIPTION	STRAND LENGTH	DIAMETER	TENSILE (lbs)	ELONGATION AT TENSILE	SPECIFIC GRAVITY
AG24SP12120SII	Safetylite II	24	1/2"	7,800 avg		
AG24SP118-120BGG	Blue Craze II	24	11.8mm	6,700 avg	4.9% at 30%	1.38
AG24SP118-120ROG	Cherry Bomb II	24	11.8mm	6,700 avg	4.9% at 30%	1.38
AG24SP118-120GOB	Inferno	24	11.8mm	6,700 avg	4.9% at 30%	1.38
AG24SP118120PGG	Mardi Gras	24	11.8mm	6,700 avg	4.9% at 30%	1.38
AG24117120C	Copperhead	24	11.7mm	6,500 avg	3.2% at 30%	1.38
AG24117120ST	Saw Tooth	24	11.7mm	6,500 avg	3.2% at 30%	1.38
AG24SP716120RO	Cherry Bomb	24	7/16" or 11.2mm	6,300 avg	4.9% at 30%	1.38
AG24SP716120PPB	Purple Haze	24	7/16" or 11.2mm	6,300 avg	4.9% at 30%	1.38
AG24SP716120OBG	Ramborista	24	7/16" or 11.2mm	6,300 avg	4.9% at 30%	1.38
AG24SP716120-RY	Rocket Line	24	7/16" or 11.2mm	6,300 avg	4.9% at 30%	1.38
AG16SP12120BOY	Bazooka	16	1/2"	8,580 avg	3% at 30%	1.38
AG16SP12120N	Neolite	16	1/2"	8,580 avg	3% at 30%	1.38
AG16SP12120S	Safetylite	16	1/2"	8,580 avg	3% at 30%	1.38
AG12SP12120RW	Forestry Pro	12	1/2"	7,300 avg	3% at 30%	1.38
AG12SP12120G	Forestry Pro Glo	12	1/2"	7,300 avg	3% at 30%	1.38


KERNMANTLE LINES

SKU	DESCRIPTION	STRAND LENGTH	DIAMETER	TENSILE (lbs)	ELONGATION AT TENSILE	SPECIFIC GRAVITY
AGKM12120ROY	Towerline	32	1/2"	8,200 avg	3% at 30%	1.38
AGKM12120DBGY	Towerline	32	1/2"	8,200 avg	3% at 30%	1.38
AGKM716120RGY	Crossfire	32	11mm	8,800 avg	15% at 30%	
AGKMC716120BW	Black and White Finish Line	32	11mm	7,800 avg	3% at 30%	1.38
AGKMC716150BB	Blue and Black Finish Line	32	11mm	7,800 avg	3% at 30%	1.38
AGKMC716150RB	Red and Black Finish Line	32	11mm	7,800 avg	3% at 30%	1.38
AGKM716120BGY	Towerline	32	11mm	6,000 avg	3% at 30%	1.38

RIGGING LINES

KERNMANTLE LINES

SKU	DESCRIPTION	DIAMETER	TENSILE (lbs)	ELONGATION AT TENSILE	SPECIFIC GRAVITY
AG12SP12120RW	Forestry Pro	1/2"	7,300 avg	3% at 30%	1.38
AG12SP58120RW	Forestry Pro	5/8"	11,000 avg	3% at 30%	1.38

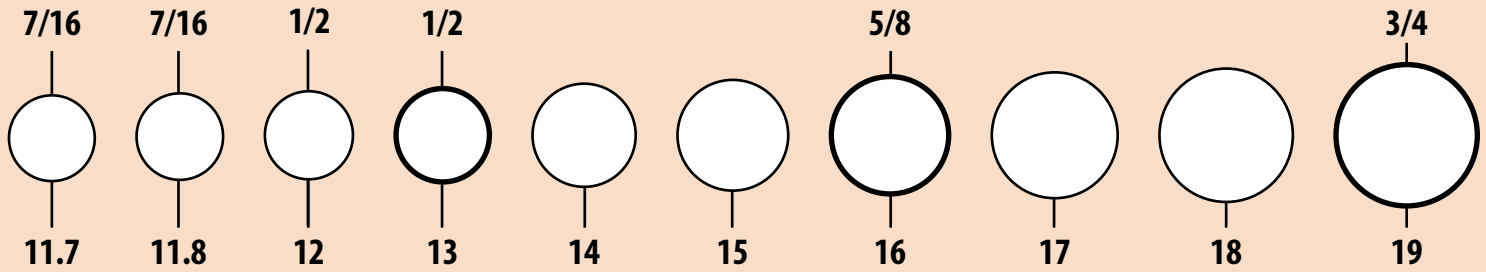

KERNMANTLE LINES, CONT.

SKU	DESCRIPTION	DIAMETER	TENSILE (lbs)	ELONGATION AT TENSILE	SPECIFIC GRAVITY
AG12SP34120RW	Forestry Pro	3/4"	18,000 avg	3% at 30%	1.38
AG12SP12150WR	Wonder Rope	1/2"	7,300 avg	3% at 30%	1.38
AG12SP58150WR	Wonder Rope	5/8"	11,000 avg	3% at 30%	1.38

DOUBLE BRAID LINES

SKU	DESCRIPTION	DIAMETER	TENSILE (lbs)	ELONGATION AT TENSILE	SPECIFIC GRAVITY
AGBR12150	Husky .5 Bull Rope	1/2"	10,500 avg	7% at 30%	1.38
AGBR916150	Husky I Bull Rope	9/16"	13,500 avg	7% at 30%	1.38
AGBR58150	Husky II Bull Rope	5/8"	17,300 avg	7% at 30%	1.38
AGBR34150	Husky III Bull Rope	3/4"	23,000 avg	7% at 30%	1.38
AGBR78150	Husky IV Bull Rope	7/8"	32,000 avg	7% at 30%	1.38
AGBR1150	Husky V Bull Rope	1"	39,000 avg	7% at 30%	1.38
AGBR12150HMP	Raging Blue Bull Rope	1/2"	10,500 avg	7% at 30%	1.38
AGBR58150HMP	Raging Red Bull Rope	5/8"	17,300 avg	7% at 30%	1.38
AGBR34150HMP	Raging Orange Bull Rope	3/4"	23,000 avg	7% at 30%	1.38
AGBR716150	Husky Bull Rope Light Duty Rigging Line	7/16"	7,300 avg	7% at 30%	1.38
AGBR38150	Husky Bull Rope Light Duty Rigging Line	3/8"	5,000 avg	7% at 30%	1.38
AGBR14600	Husky Bull Rope Light Duty Rigging Line	1/4"	2,400 avg	7% at 30%	1.38
AGBR512150	Pro Force HMPE Bull Rope	1/2"	18,500 avg	1.2% at 30%	1.1
AGBR58150	Pro Force HMPE Bull Rope	5/8"	21,500 avg	1.2% at 30%	1.1
AGBR5916150	Pro Force HMPE Bull Rope	9/16"	31,000 avg	1.2% at 30%	1.1

TWISTED BRAID LINES

SKU	DESCRIPTION	DIAMETER	TENSILE (lbs)	ELONGATION AT TENSILE	SPECIFIC GRAVITY
AG3STP12150B	3-Strand Twisted Polyester (150 ft)	1/2"	6,400 avg		
AG3STP12200B	3-Strand Twisted Polyester (200 ft)	1/2"	6,400 avg		
AG3STP12600B	3-Strand Twisted Polyester (600 ft)	1/2"	6,400 avg		
AG3STP58150R	3-Strand Twisted Polyester (150 ft)	5/8"	9,350 avg		
AG3STP58200R	3-Strand Twisted Polyester (200 ft)	5/8"	9,350 avg		
AG3STP58600R	3-Strand Twisted Polyester (600 ft)	5/8"	9,350 avg		
AG3STP34150O	3-Strand Twisted Polyester (150 ft)	3/4"	11,300 avg		
AG3STP34200O	3-Strand Twisted Polyester (200 ft)	3/4"	11,300 avg		
AG3STP34600O	3-Strand Twisted Polyester (600 ft)	3/4"	11,300 avg		

NEW ROPE



24-STRAND CLIMBING LINES (11.7mm)

Our new 11.7mm 24-strand climbing lines are composed of a double braid polyester cover and a 16-strand braided polyester core with spliced and sewn eye options.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
6,500 lbs avg	3.2% at 30%	1.38

FEATURES

- Meets and exceeds ANSI Z133 standard of 5,400 lbs
- Excellent for SRT and MRS climbing
- Runs smoothly through mechanical devices
- Keeps round under the most stressful conditions
- Spliceable and high visibility




Meets or exceeds
ANSI Z133 Standard



COPPERHEAD™

120' | AG24117120C
150' | AG24117150C
200' | AG24117200C
600' | AG24117600C

120' AND ROPE BAG | AG24117120C-RB
150' AND ROPE BAG | AG24117150C-RB
200' AND ROPE BAG | AG24117200C-RB
600' AND ROPE BAG | AG24117600C-RB



SAW TOOTH™

120' | AG24117120ST
150' | AG24117150ST
200' | AG24117200ST
600' | AG24117600ST

120' AND ROPE BAG | AG24117120ST-RB
150' AND ROPE BAG | AG24117150ST-RB
200' AND ROPE BAG | AG24117200ST-RB
600' AND ROPE BAG | AG24117600ST-RB

Need rope storage?
Flip to page 59 learn more about our new rope bags.



24-STRAND CLIMBING LINES (11.8mm)




Meets or exceeds
ANSI Z133 Standard

Our 11.8mm 24-strand climbing line is composed of a double braid polyester cover, a 16-strand braided polyester core, and a neon colored 3-strand twisted core.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
6,700 lbs avg	4.9% at 30%	1.38

FEATURES

- Meets and exceeds ANSI Z133 standard of 5,400 lbs
- Excellent for SRT and MRS climbing
- Runs smoothly through mechanical devices
- Keeps round under most stressful conditions
- Spliceable and high visibility




BLUE CRAZE II™

120' | AG24SP118-120BGG
150' | AG24SP118-150BGG
200' | AG24SP118-200BGG




INFERNO™

120' | AG24SP118-120GOB
150' | AG24SP118-150GOB
200' | AG24SP118-200GOB



CHERRY BOMB II™

120' | AG24SP118-120ROG
150' | AG24SP118-150ROG
200' | AG24SP118-200ROG



MARDI GRAS™

120' | AG24SP118120PGG
150' | AG24SP118150PGG
200' | AG24SP118-200PGG


24-STRAND CLIMBING LINE (1/2")

This line features a 24-strand double braid polyester jacket with a 12-strand polyester core that is braided under tension, optimized for MRS climbing.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
7,800 lbs avg		

FEATURES

- Meets and exceeds ANSI Z133 standard of 5,400 lbs
- Excellent for SRT and MRS climbing
- Runs smoothly through mechanical devices
- Keeps round under most stressful conditions
- Spliceable and high visibility



SAFETYLITE II™

120' | AG24SP12120SII
150' | AG24SP12150SII
200' | AG24SP12200SII

24-STRAND CLIMBING LINES (11.2mm)



Meets or exceeds
ANSI Z133 Standard

The 7/16" or 11.2mm 24-strand climbing line has a double braid polyester cover, a 16-strand braided polyester core, and a neon colored 3-strand twisted core.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
6,300 lbs avg	4.9% at 30%	1.38


FEATURES

- Meets and exceeds ANSI Z133 standard of 5,400 lbs
- Excellent for SRT and MRS climbing
- Runs smoothly through mechanical devices
- Keeps round under most stressful conditions
- Spliceable and high visibility




CHERRY BOMB™

120' | AG24SP716120RO
150' | AG24SP716150RO
200' | AG24SP716200RO




RAMBORISTA™

120' | AG24SP716120OBG
150' | AG24SP716150OBG
200' | AG24SP716200OBG




PURPLE HAZE™

120' | AG24SP716120PPB
150' | AG24SP716150PPB
200' | AG24SP716200PPB



ROCKET LINE™

120' | AG24SP716120-RY
150' | AG24SP716150RY
200' | AG24SP716200RY

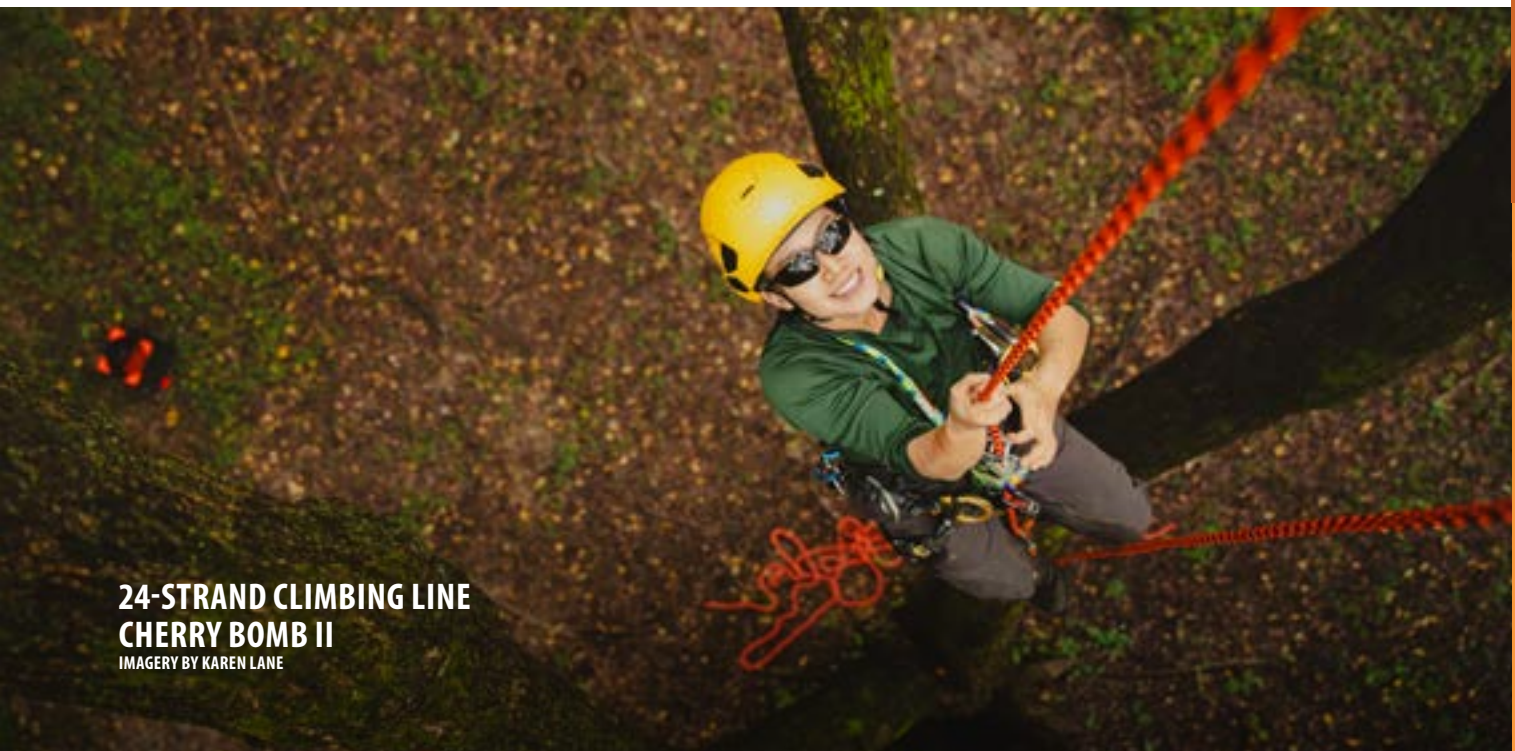

24-STRAND CLIMBING LINE
CHERRY BOMB II
IMAGERY BY KAREN LANE



24-STRAND CLIMBING LINE - CHERRY BOMB II
IMAGERY BY KAREN LANE

16-STRAND CLIMBING LINE (1/2")



Meets or exceeds
ANSI Z133 Standard

Features a 16-strand braided polyester jacket over an 8-strand parallel twisted nylon core that is braided under tension.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
8,580 lbs avg	3% at 30%	1.38


FEATURES

- Outer braid provides extended life
- Nylon core for extra strength
- Ready to climb right out of the package
- Abrasion resistance from thick outer cover
- Keeps round shape




BAZOOKA™

120' | AG16SP12120BOY
150' | AG16SP12150BOY
200' | AG16SP12200BOY



SAFETYLITE™

120' | AG16SP12120S
150' | AG16SP12150S
200' | AG16SP12200S



NEOLITE™

120' | AG16SP12120N
150' | AG16SP12150N
200' | AG16SP12200N

12-STRAND CLIMBING LINES (12.7mm)

A 12-strand single braid polyester static climbing line with a parallel twisted core.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
7,300 lbs avg	3% at 30%	1.38

FEATURES

- Meets and exceeds ANSI Z133 standard of 5,400 lbs
- Retains 100% strength when wet
- Holds together when rigging without blocks/pulleys
- Custom colors available for orders over 1,200 ft
- Originally designed for Canadian logging industry



FORESTRY PRO™

120' | AG12SP12120RW
150' | AG12SP12150RW
200' | AG12SP12200RW



FORESTRY PRO GLO™

120' | AG12SP12120G
150' | AG12SP12150G
200' | AG12SP12200G

32-STRAND KERNMANTLE ARBORIST STATIC CLIMBING LINES (12.7mm)



Meets or exceeds
ANSI Z133 Standard

A 32-strand static polyester tower line with a firm construction and a straight core.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
8,200 lbs avg	3% at 30%	1.38


FEATURES

- Firm 32-strand jacket provides extended life
- Premium fibers
- Braided under tension - ready to climb
- Exceptional abrasion resistance from outer cover
- Keeps round



TOWER LINE™

120' | AGKM12120DBGY
150' | AGKM12150DBGY
200' | AGKM12200DBGY



TOWER LINE™

120' | AGKM12120ROY
150' | AGKM12150ROY
200' | AGKM12200ROY


32-STRAND KERNMANTLE ARBORIST SEMI-STATIC CLIMBING LINE (11mm)

This line is comprised of a 32-strand semi-static kernmantle climbing line with a polyester jacket and an 8-strand twisted parallel nylon core.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
8,800 lbs avg	15% at 30%	

FEATURES

- Excellent for SRT and MRS climbing
- Premium fibers
- Keeps round under the most stressful circumstances
- Sewn tight eyes available



CROSSFIRE™

120' | AGKM716120RGY
150' | AGKM716150RGY
200' | AGKM716200RGY

32-STRAND KERNMANTLE ARBORIST STATIC AND CLIMBING LINE (11mm)




Meets or exceeds
ANSI Z133 Standard

Three different colorways, black and white, black and blue, black and red, of a 32-strand static polyester jacket over an 8-strand parallel nylon core.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
7,800 lbs avg	3% at 30%	1.38


FEATURES

- Outer braid provides extended life
- Nylon core for extra strength
- Ready to climb right out of the package
- Exceptional abrasion resistance from thick outer cover
- Keeps round shape



FINISH LINE™

120' | AGKMC716120BW
150' | AGKMC716150BW
200' | AGKMC716200BW
600' | AGKMC716600BW



FINISH LINE™

150' | AGKMC716150BB
200' | AGKMC716200BB
600' | AGKMC716600BB



FINISH LINE™

150' | AGKMC716150RB
200' | AGKMC716200RB
600' | AGKMC716600RB


32-STRAND KERNMANTLE ARBORIST STATIC AND CLIMBING LINE (7/16)

A 32-strand polyester climbing/tower line with a form construction and straight core with bright colors for high visibility.

TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
6,000 lbs avg	3% at 30%	1.38

FEATURES

- Firm 32-strand outer braid for extended life
- Braided under tension - ready to climb
- Keeps round
- Exceptional abrasion resistance from thick outer cover



TOWER LINE™

120' | AGKM716120BGY
150' | AGKM716150BGY
200' | AGKM716200BGY
600' | AGKM716600BGY

DOUBLE BRAID HUSKY BULL ROPE™


Double braid construction of a polyester cover and nylon core, finished with our Husky Urethane™ coating for abrasion resistance.



DIAMETER	TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
1/2"	10,500 lbs avg	7% at 30%	1.38
1/2"	10,500 lbs avg	7% at 30%	1.38
9/16"	13,500 lbs avg	7% at 30%	1.38
5/8"	17,300 lbs avg	7% at 30%	1.38
5/8"	17,300 lbs avg	7% at 30%	1.38
3/4"	23,000 lbs avg	7% at 30%	1.38
3/4"	23,000 lbs avg	7% at 30%	1.38
7/8"	32,000 lbs avg	7% at 30%	1.38
1"	39,000 lbs avg	7% at 30%	1.38


FEATURES

- Excellent for arborist work
- Exceeds the strength of double braid polyester or nylon
- Husky Urethane™ coating for abrasion resistance
- Color coded for size recognition




1/2" HUSKY .5 BULL ROPE™

150' | AGBR12150
200' | AGBR12200
600' | AGBR12600




3/4" HUSKY III BULL ROPE™

150' | AGBR34150
200' | AGBR34200
600' | AGBR34600



1/2" RAGING BLUE BULL ROPE™

150' | AGBR12150HMP
200' | AGBR12200HMP
600' | AGBR12600HMP



3/4" RAGING ORANGE BULL ROPE™

150' | AGBR34150HMP
200' | AGBR34200HMP
600' | AGBR34600HMP



9/16" HUSKY I BULL ROPE™

150' | AGBR916150
200' | AGBR916200
600' | AGBR916600



7/8" HUSKY IV BULL ROPE™

150' | AGBR78150
200' | AGBR78200
600' | AGBR78600




5/8" HUSKY II BULL ROPE™

150' | AGBR58150
200' | AGBR58200
600' | AGBR58600



1" HUSKY V BULL ROPE™

150' | AGBR1150
200' | AGBR1200
600' | AGBR1600



5/8" RAGING RED BULL ROPE™

150' | AGBR58150HMP
200' | AGBR58200HMP
600' | AGBR58600HMP



Meets or exceeds
ANSI Z133 Standard



ROPE FEATURED FROM LEFT TO RIGHT

1/2" HUSKY .5 BULL ROPE™
AGBR12150

1/2" RAGING BLUE BULL ROPE™
AGBR12150HMP

9/16" HUSKY II BULL ROPE™
AGBR916150

5/8" HUSKY II BULL ROPE™
AGBR58150

5/8" RAGING RED BULL ROPE™
AGBR58150HMP

3/4" HUSKY III BULL ROPE™
AGBR34150

3/4" RAGING ORANGE BULL ROPE™
AGBR34150HMP

7/8" HUSKY IV BULL ROPE™
AGBR78150

1" HUSKY V BULL ROPE™
AGBR1150

FORESTRY PRO™

Made of 12-strand polyester with a 4-strand polyester kernmantle core.



Meets or exceeds
ANSI Z133 Standard

DIAMETER	TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
1/2"	7,300 lbs avg	3% at 30%	1.38
5/8"	11,000 lbs avg	3% at 30%	1.38
3/4"	18,000 lbs avg	3% at 30%	1.38

FEATURES

- Works as a climbing or rigging line
- Retains 100% strength when wet
- Holds together when rigging without blocks/pulleys



1/2" FORESTRY PRO™

120' | AG12SP12120RW
150' | AG12SP12150RW
200' | AG12SP12200RW



3/4" FORESTRY PRO™

120' | AG12SP34120RW
150' | AG12SP34150RW
200' | AG12SP34200RW



5/8" FORESTRY PRO™

120' | AG12SP58120RW
150' | AG12SP58150RW
200' | AG12SP58200RW


WONDER ROPE™

A Husky Urethane™ coated 2-strand polyester with a 4-strand kernmantle core to keep the rope firm and round.

DIAMETER	TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
1/2"	7,300 lbs avg	3% at 30%	1.38
5/8"	11,000 lbs avg	3% at 30%	1.38

FEATURES

- Urethane coating for abrasion resistance and protection from chemical and UV
- Retains 100% strength when wet
- Great for knotless rigging systems
- 12-strand braid holds together when rigging without blocks/pulleys



1/2" WONDER ROPE™

150' | AG12SP12150WR
200' | AG12SP12200WR
600' | AG12SP12600WR



5/8" WONDER ROPE™

150' | AG12SP58150WR
200' | AG12SP58200WR
600' | AG12SP58600WR

PRO FORCE™ HMPE BULL ROPE

Made of 12-strand polyester with a 4-strand polyester kernmantle core.




Meets or exceeds
ANSI Z133 Standard

DIAMETER	TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
1/2"	18,500 lbs avg	1.2% at 30%	1.1
9/16"	21,500 lbs avg	1.2% at 30%	1.1
5/8"	31,000 lbs avg	1.2% at 30%	1.1


FEATURES

- Works as a climbing or rigging line
- Retains 100% strength when wet
- Holds together when rigging without blocks/pulleys




1/2" PRO FORCE™ 
150' | AGBRS12150
200' | AGBRS12200
600' | AGBRS12600



5/8" PRO FORCE™ 
150' | AGBRS58150
200' | AGBRS58200
600' | AGBRS58600



9/16" PRO FORCE™ 
150' | AGBRS916150
200' | AGBRS916200
600' | AGBRS916600

DOUBLE BRAID HUSKY BULL ROPE™

Made of 12-strand polyester with a 4-strand polyester kernmantle core.

DIAMETER	TENSILE	ELONGATION AT TENSILE	SPECIFIC GRAVITY
1/4"	2,400 lbs avg	7% at 30%	1.38
3/8"	5,000 lbs avg	7% at 30%	1.38
7/16"	7,300 lbs avg	7% at 30%	1.38

FEATURES

- Excellent for arborist work
- Husky Urethane™ coating for abrasion resistance
- Exceeds the strength of double braid polyester or nylon
- Color coded for size recognition

1/4" LIGHT DUTY RIGGING LINE

600' | AGBR14600

3/8" LIGHT DUTY RIGGING LINE

150' | AGBR38150
200' | AGBR38200
600' | AGBR38600

7/16" LIGHT DUTY RIGGING LINE

150' | AGBR716150
200' | AGBR716200
600' | AGBR716600

HUSKY COATED 3-STRAND™

High strength and firm round construction – available in 1/2", 5/8", and 3/4".



Meets or exceeds
ANSI Z133 Standard

DIAMETER	TENSILE
1/2"	5,750 lbs avg
5/8"	9,350 lbs avg
3/4"	11,300 lbs avg

FEATURES

- 100% polyester fiber
- Nice, firm construction
- Easy to splice
- Great for natural crotch rigging
- Excellent for tree/limb removal



1/2" 3-STRAND TWISTED POLYESTER

- 120' | AG3STP12120B
- 150' | AG3STP12150B
- 200' | AG3STP12200B
- 600' | AG3STP12600B



5/8" 3-STRAND TWISTED POLYESTER

- 120' | AG3STP58120R
- 150' | AG3STP58150R
- 200' | AG3STP58200R
- 600' | AG3STP58600R



3/4" 3-STRAND TWISTED POLYESTER

- 120' | AG3STP34120O
- 150' | AG3STP34150O
- 200' | AG3STP34200O
- 600' | AG3STP34600O

02 ARBORIST

ASCENT AND DESCENT ...	28
CARABINERS	33
LANYARDS & FLIPLINES	34
RIGGING.....	41
SLINGS.....	42
THROW LINES & THROW WEIGHTS	50





Meets or exceeds
ANSI Z133 Standard

FRICION 8™ AND FRICION 10™ PRUSIKS

Optimal safety in mind, our firm construction keeps the line round for consistent high performance. Available in 26", 32", 250', 600' and 1,200' w/ optional aluminum double-locking snaps.

SKU	DIAMETER AND LENGTH	MINIMUM TENSILE	DESCRIPTION
AGDBPTV826-O	8mm x 26"	5,560 lbs	Sewn eyes
AGDBPTV828-O	8mm x 28"	5,560 lbs	Sewn eyes
AGDBPTV830-O	8mm x 30"	5,560 lbs	Sewn eyes
AGDBPTV832-O	8mm x 32"	5,560 lbs	Sewn eyes
AGDBPTV832-O	8mm x 32"	5,560 lbs	Aluminum snap
AGDBPTV1026-R	10mm x 26"	9,150 lbs	Sewn eyes
AGDBPTV1026-R	10mm x 26"	9,150 lbs	Aluminum snap
AGDBPTV1028-R	10mm x 28"	9,150 lbs	Sewn eyes
AGDBPTV1030-R	10mm x 30"	9,150 lbs	Sewn eyes
AGDBPTV1032-R	10mm x 32"	9,150 lbs	Sewn eyes
AGDBPTV1032-R	10mm x 32"	9,150 lbs	Aluminum snap

FEATURES

- Meets and exceeds ANSI Z133 Standard of 5,400 lbs
- Excellent for SRT and MRS climbing
- Runs smoothly through mechanical devices
- Keeps round under most stressful conditions
- Spliceable and high visibility

TECHNORA AND VECTRAN

Our friction 8 and 10 prusiks are constructed with a polyester/technora jacket over a vectran core. Technora (932°F) and Vectran (625°F) are very high heat-resistant fibers that are made to withstand the heat friction that builds up when descending on your climbing rope in the tree.

FRICION 8™



FRICION 10™



RIGGING PRUSIK

Made of 12-strand™ premium polyester, which is coated in Husky Urethane™ for abrasion resistance.

SKU	SIZE	TENSILE	DESCRIPTION
AG12SP3838E2	3/8" x 38'	5,400 lbs avg	Rigging prusik

FEATURES

- Husky Urethane™ coating
- Works with mechanical advantage rigging systems
- High visibility green
- Affordable and durable



CHAFE SLEEVES

Made of 12-strand™ premium polyester, which is coated in Husky Urethane™ for abrasion resistance.

SKU	INSIDE DIAMETER	LENGTH	MATERIAL
AGCS12	1/2"	50 or 300	Nylon
AGCS11D	1"	50 or 300	Nylon
AGCS112	1 1/2"	50 or 300	Nylon
AGC134	1 3/4"	50 or 300	Nylon
AGCS2	2"	50 or 300	Nylon

FEATURES

- Excellent for protecting your rope
- Polyester Twine protects your splicing



HEAVY DUTY CHAFE SLEEVES

Easy-to-set-up chafe sleeve provides durable, stationary tree or rope protection with a smooth-running line.

SKU	INSIDE DIAMETER	LENGTH	MATERIAL
AGCSHD3430	3/4"	30'	HD polyester
AGCSHD11230	1-1/2"	30'	HD polyester

FEATURES

- Excellent for protecting your rope
- Polyester twine protects your splicing
- Keeps stationary compared to standard chafe





Meets or exceeds
ANSI Z133 Standard

TRIPLE ATTACHMENT PULLEY

A climbing pulley specifically designed for applications that require multiple connection points.

SKU	COLOR
AGTAMP	Purple



FEATURES

- Designed for climbing systems that require multiple connection points, thanks to its three attachment holes.
- Finished with a dual-tone anodized process, so each pulley has a unique color pattern.
- Made from aluminum, which balances strength and lightweight performance.
- Compatible with common rigging gear (carabiners, webbing, rope) for flexible setup.

TURBOFOOT ASCENDERS

Integrated rollers deliver efficiency during climbing and low wear-and-tear overall.

SKU	FOOT	QUANTITY	COLOR
AGTFA-L	Left	1	Red and black
AGTFA-R	Right	1	Red and black

FEATURES

- Integrated rollers provide smooth rope travel and reduce wear on both the rope and the ascender.
- Two-mode cam (“free” or “locked”) with drain holes keeps operation easy and reliable in dirty conditions.
- Durable aluminum body and stainless cam with ergonomic, secure boot straps for a solid fit.
- Lightweight (~150 g) and compatible with 8–13 mm ropes for versatile climbing setups.



TREE ACCESS CHEST HARNESS

Designed to deliver maximum efficiency and performance for SRT maneuvers, compatible with harnesses and ascenders.

SKU	QUANTITY	COLOR
3126	1	Red and black



FEATURES

- Optimized for SRT Climbing
- Numerous loops for secondary connections
- Provides support and load dispersal

TREE ACCESS ST SADDLE

A versatile, comfortable tree climbing harness compatible with lanyard systems and ascenders.

SKU	SIZE	STANDARDS MET
AGTAST-S-L	Small–Large	CE, EN, ANSI, and ASTM
AGTAST-L-XXL	Large–XXLarge	CE, EN, ANSI, and ASTM



FEATURES

- Meets CE, EN, ANSI, and ASTM safety standards for professional tree climbing.
- Features a comfortable floating ring design for improved mobility while suspended.

TREE ACCESS XT SADDLE

A versatile, comfortable tree climbing harness compatible with lanyard systems and ascenders.

SKU	SIZE	STANDARDS MET
AGTAXT-S-L	Small–Large	CE, EN, ANSI, and ASTM
AGTAXT-L-XXL	Large–XXLarge	CE, EN, ANSI, and ASTM



FEATURES

- Fully certified for fall-arrest (meets CE, EN, ANSI, and ASTM standards).
- Offers versatile connection options: two mobile rope bridges, double ventral points, side/back rings, plus lots of gear loops.



All Gear, Inc.

All Gear, Inc.

MULTI COLOR CARABINERS
IMAGERY BY KAREN LANE



Meets or exceeds
ANSI Z133 Standard

CLIMBING & RIGGING CARABINERS

CLIMBING CARABINERS

Durable, vibrant, and easy to spot, helping climbers quickly organize and access their gear.

SKU	STYLE
AGCBMOO	Orange Multi color
AGCBMGO	Green Multi color
AGCBMPO	Ultra Violet Multi color
AGCBGO	Gun Metal
AGCBCTO	Triple Action Oval Aluminum

FEATURES

- 21mm Opening
- 108mm Height
- 65mm Width
- 75g Weight



24kN

AGCBMOO



24kN

AGCBMGO



24kN

AGCBMPO



24kN

AGCBGO



FEATURES

- Triple Action
- Aluminum



24kN

AGCBCTO

RIGGING CARABINER

Heavy-duty, twist-lock steel pear-shaped rigging carabiner to securely link your ropes, slings, pulleys, and other gear.

SKU	STYLE
AGCBPS	Pear Shaped Rigging Carabiner

FEATURES

- 51mm Opening
- 217mm Height
- 125mm Width
- 774g Weight



16kN



Meets or exceeds
ANSI Z133 Standard


POSITIONING LANYARDS WITH ROPE GRAB

This lanyard comes with an ANSI-rated Aluminum snap hook, rope grab, and an aluminum carabiner.

SKU	DIAMETER	LENGTH	ROPE
AGPL1610S-RG	1/2"	10'	Safetylite
AGPL1612S-RG	1/2"	12'	Safetylite
AGPL1610N-RG	1/2"	10'	Neolite
AGPL1612N-RG	1/2"	12'	Neolite
AGPL1610BOY-RG	1/2"	10'	Bazooka
AGPL1612BOY-RG	1/2"	12'	Bazooka

FEATURES

- 1/2" 16-strand rope is very durable as a lanyard
- All hardware is made from lightweight aluminum
- Rope grab, carabiner, and hook meet ANSI-Z133 standards



SAFETYLITE™



NEOLITE™



BAZOOKA™





**BLUE CRAZE™
MICRO PULLEY
WORK POSITIONING LANYARD**
IMAGERY BY KAREN LANE

MICRO PULLEY WORK POSITIONING LANYARD

This lanyard comes with ANSI aluminum snap hook, micro pulley, friction prusik, and aluminum carabiners.

SKU	STRAND COUNT	SIZE	ROPE
AGMPPL1110	32	11mm x 10'	Finish Line™, Tower Line™, or Crossfire™
AGMPPL1115	32	11mm x 15'	Finish Line™, Tower Line™, or Crossfire™
AGMPPL11210	24	11.2mm x 10'	Cherry Bomb™, Rocket Line™, Ramborista™, Blue Craze™, or Purple Haze™
AGMPPL11215	24	11.2mm x 15'	Cherry Bomb™, Rocket Line™, Ramborista™, Blue Craze™, or Purple Haze™
AGMPPL11810	24	11.8mm x 10'	Inferno™, Mardi Gras™, Blue Craze II™, or Cherry Bomb II™
AGMPPL11215-BGG	24	11.8mm x 15'	Inferno™, Mardi Gras™, Blue Craze II™, or Cherry Bomb II™
AGMPPL1215-BOY	16	1/2" x 15'	Safetylite™, Safetylite II™, Neolite™, or Bazooka™

FEATURES

- Meets ANSI Z133-2017 requirement for all climbers to use a lanyard as a secondary attachment.

 FINISH LINE™	 RAMBORISTA™	 CHERRY BOMB II™
 TOWER LINE™	 BLUE CRAZE™	 BLUE CRAZE II™
 CROSSFIRE™	 PURPLE HAZE™	 SAFETYLITE II™
 CHERRY BOMB™	 INFERNO™	 NEOLITE™
 ROCKET LINE™	 MARDI GRAS™	 BAZOOKA™



Meets or exceeds
ANSI Z133 Standard

DOUBLE BRAID ADJUSTABLE LANYARD

Available in 3-6' or 4-8' lengths and designed not to hockle.

SKU	LENGTH
AGDBC12AL3-6	1/2" X 3-6'
AGDBC12AL4-8	1/2" X 4-8'

FEATURES

- Double braid avoids hockle or kink
- Husky coat is very resistant to abrasion and snagging
- Double-locking safety hooks meet or exceed ANSI Z-139.1



2-IN-1 SAFETY LANYARD

Two steel double-locking snap hooks and 3/8" Husky Bull Rope in neon green with one aluminum double-locking snap hook.

SKU	LENGTH
AGDBC12AL8-2in1-S	1/2" X 8'
AGDBC12AL10-2in1-S	1/2" X 10'
AGDBC12AL12-2in1-S	1/2" X 12'
AGDBC12AL8-2in1-A	1/2" X 8'
AGDBC12AL10-2in1-A	1/2" X 10'
AGDBC12AL12-2in1-A	1/2" X 12'

FEATURES

- Husky Bull Rope jacket is made to last in tough environments
- Plastic thimble on each sewn eye for extended durability



WIRE CORE LANYARDS

This lanyard comes with one sewn eye, an aluminum hook and thimble, and end sewn back over.

SKU	SIZE
AGWCL128SSH	1/2' X 8'
AGWCL1210SSH	1/2' X 10'
AGWCL1210SH	1/2' X 10'
AGWCL1212SSH	1/2' X 12'
AGWCL1215SSH-RG	1/2' X 12'
AGWCL1215SSH	1/2' X 15'
AGWCL5810SSH	5/8' X 10'
AGWCL5812SH	5/8' X 12'
AGWCL5815SSH	5/8' X 15'

FEATURES

- Top quality wire core swaged lanyard
- Great for climbers using spikes
- Excellent for abrasion wear and strength
- Offered with steel double-locking snap hooks and steel double-locking snap swivel hooks
- Bright orange color for high-visibility
- Proudly made in the USA

1/2 X 8 STEEL HOOK WIRE CORE FLIP LINE

AGWCL128SSH





Meets or exceeds
ANSI Z133 Standard

SAFETY LANYARDS

This lanyard comes with one sewn eye, an aluminum hook and thimble, and end sewn back over.

SKU	STRAND COUNT	SIZE	ROPE
AGKMC7168SHA	32	11mm x 8'	Finish Line™, Blue Finish Line™, Red Finish Line™, Tower Line™, or Crossfire™
AGKMC71610SHA	32	11mm x 10'	Finish Line™, Blue Finish Line™, Red Finish Line™, Tower Line™, or Crossfire™
AGKMC71612SHA	32	11mm x 12'	Finish Line™, Blue Finish Line™, Red Finish Line™, Tower Line™, or Crossfire™
AGKMC71620SHA	32	11mm x 20'	Finish Line™, Blue Finish Line™, Red Finish Line™, Tower Line™, or Crossfire™
AG24SP1188SHA	24	11.8mm x 8'	Inferno™, Mardi Gras™, Blue Craze II™, or Cherry Bomb II™
AG24SP11810SHA	24	11.8mm x 10'	Inferno™, Mardi Gras™, Blue Craze II™, or Cherry Bomb II™
AG24SP11812SHA	24	11.8mm x 12'	Inferno™, Mardi Gras™, Blue Craze II™, or Cherry Bomb II™
AG24SP11820SHA	24	11.8mm x 20'	Inferno™, Mardi Gras™, Blue Craze II™, or Cherry Bomb II™
AG24SP7168SHA	24	11.2mm x 8'	Cherry Bomb™, Rocket Line™, Ramborista™, Blue Craze™, or Purple Haze™
AG24SP71610SHA	24	11.2mm x 10'	Cherry Bomb™, Rocket Line™, Ramborista™, Blue Craze™, or Purple Haze™
AG24SP71612SHA	24	11.2mm x 12'	Cherry Bomb™, Rocket Line™, Ramborista™, Blue Craze™, or Purple Haze™
AG16SP128SH	16	1/2" x 8'	Bazooka™, Neolite™, or Safetylite™
AG16SP1210SH	16	1/2" x 10'	Bazooka™, Neolite™, or Safetylite™
AG16SP1212SH	16	1/2" x 12'	Bazooka™, Neolite™, or Safetylite™
AG16SP1220SH	16	1/2" x 20'	Bazooka™, Neolite™, or Safetylite™

FEATURES

- Vivid colors for the best visibility
- Thimble and heat shrink tubing extend the durability

ROPE OPTIONS



FINISH LINE™



BLUE FINISH LINE™



RED FINISH LINE™



TOWER LINE™



CROSSFIRE™



CHERRY BOMB™



ROCKET LINE™



RAMBORISTA™



BLUE CRAZE™



PURPLE HAZE™



INFERNO™



MARDI GRAS™



CHERRY BOMB II™



BLUE CRAZE II™



SAFETYLITE™



NEOLITE™



BAZOOKA™



CHERRY BOMB™
SAFETY LANYARD
IMAGERY BY KAREN LANE

LANYARDS AND FLIPLINES

ARBORIST

HMPE SPEED LINE KIT



Meets or exceeds
ANSI Z133 Standard

HMPE SPEED LINE KIT

Kit includes 5½" HMPE rigging loops (26" or 40") with double-locking aluminum snaphooks and a girth-hitched storage loop for easy saddle attachment.

SKU	DETAILS	RIGGING TENSILE	BREAK STRENGTH
AGSLK526	26" 5pcs	16,000 lbs avg	5,000 avg
AGSLK1026	26" 10 pcs	16,000 lbs avg	5,000 avg
AGSLK540	40" 5pcs	16,000 lbs avg	5,000 avg
AGSLK1040	40" 10 pcs	16,000 lbs avg	5,000 avg

FEATURES

- Good for use on uneven or sloped terrain
- Multiple speed line clips make it easy to balance loads
- Easy to move over a long distance
- Quickly connect and disconnect from the speed line

NYLON LOOP SPEED LINE KIT

SKU	DETAILS	RIGGING TENSILE	BREAK STRENGTH
AGSLKNL526	26" 5pcs	16,000 lbs avg	5,000 avg
AGSLKNL1026	26" 10 pcs	16,000 lbs avg	5,000 avg
AGSLKNL540	40" 5pcs	16,000 lbs avg	5,000 avg
AGSLKNL1040	40" 10 pcs	16,000 lbs avg	5,000 avg

FEATURES

- 7,000 lb rigging loop rating; 5,000 lb girth-hitched snap hook (speed-line use)
- 1" nylon loops with double-locking aluminum snap hooks
- Storage rope loop for easy saddle attachment





RIGGING RING
IMAGERY BY KAREN LANE

RIGGING RINGS

Lightweight aluminum rigging rings that provide a simple, low-drag rope redirect—reducing friction, protecting rope, and speeding up setups without the need for pulleys or blocks.

SKU	DIAMETER	COLOR
AGLFR34-BLUE	3/4"	BLUE
AGLFR118-BLUE	1 1/8"	BLUE
AGLFR118-RED	1 1/8"	RED
AGLFR112-BLUE	1 1/2"	BLUE
AGLFR112-RED	1 1/2"	RED
AGLFR2-BLUE	2"	BLUE

FEATURES

- Great system for municipalities
- Loops make great redirectors






Meets or exceeds
ANSI Z133 Standard

MULTI PRO™ RING TO RING SLING

Made of polyester coated in Husky Urethane™ coating and covered with chafe sleeve, low-friction Rings, and installed with locking brummel splices.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SP12MBRR-30	1/2" x 30"	1,980 lbs	1 lb
AG12SP58MRRR-40	5/8" x 40"	2,880 lbs	2 lbs
AG12SP34MORR-50	3/4" x 50"	3,780 lbs	3 lbs
AG12SP78MGRR-60	7/8" x 60"	5,760 lbs	4 lbs

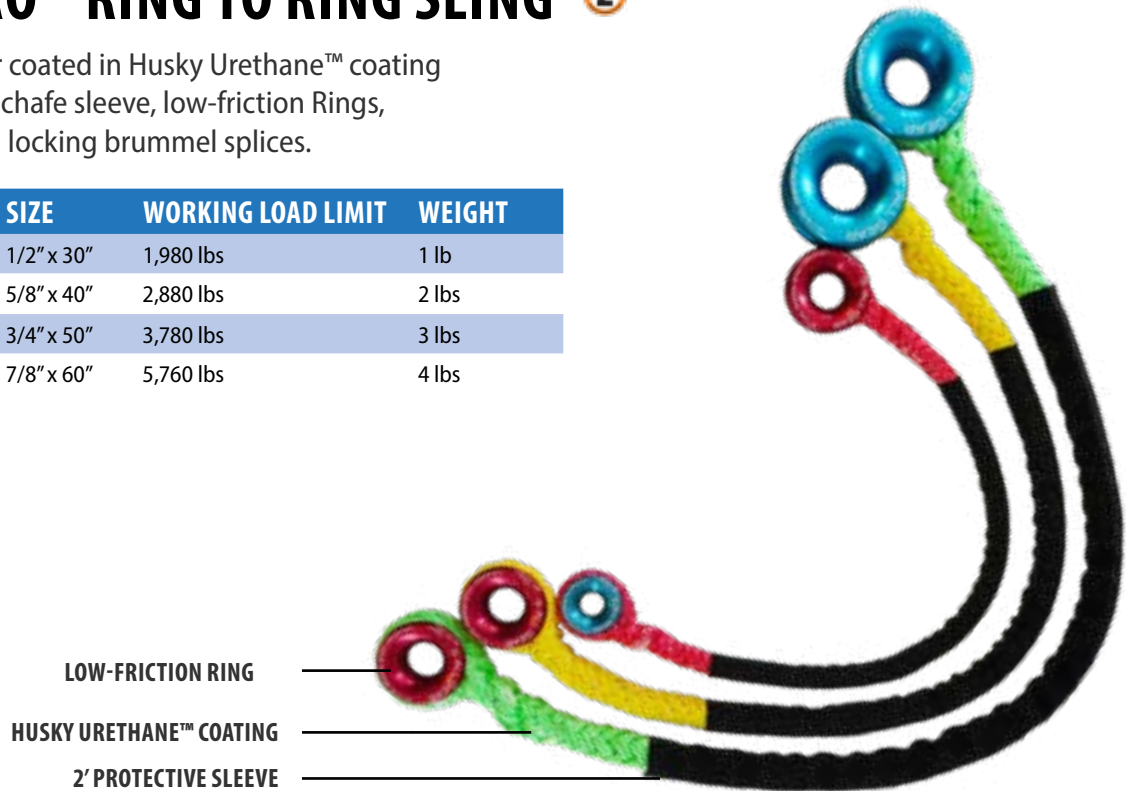

MULTI PRO™ SOFT RIG SLING

Featuring a 2" ballistic nylon outer jacket which slides to cover any of the rig point eyes for extended life with an additional Husky Urethane™ coating for abrasion resistance.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AGSRS12S-124MB	1/2" x 4'	1,980 lbs	3 lbs
AGSRS12S-128MB	1/2" x 8'	1,980 lbs	3 lbs
AGSRS12S-585MR	5/8" x 5'	2,880 lbs	4 lbs
AGSRS12S-5810MR	5/8" x 10'	2,880 lbs	4 lbs
AGSRS12S-345MO	3/4" x 5'	3,780 lbs	5.5 lbs
AGSRS12S-3410MO	3/4" x 10'	3,780 lbs	5.5 lbs
AGSRS12S-785MG	7/8" x 5'	5,760 lbs	
AGSRS12S-7810MG	7/8" x 10'	5,760 lbs	



FEATURES

- 2' Protective Sleeve on wear point to extend sling life
- Easy to set up and rig through low-friction ring
- Husky Urethane™ coating for abrasion resistance


HUSKY-12™ SOFT RIG SLING

Featuring a 2" ballistic nylon outer jacket which slides to cover any of the rig point eyes for extended life with an additional Husky Urethane™ coating for abrasion resistance.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AGSRS12S-124	1/2" x 4'	1,980 lbs	3 lbs
AGSRS12S-128	1/2" x 8'	1,980 lbs	3 lbs
AGSRS12S585	5/8" x 5'	2,880 lbs	4 lbs
AGSRS12S-5810	5/8" x 10'	2,880 lbs	4 lbs
AGSRS12S-345	3/4" x 5'	3,780 lbs	5.5 lbs
AGSRS12S-3410	3/4" x 10'	3,780 lbs	5.5 lbs
AGSRS12S-110BB	1" x 10'	7,200 lbs	

FEATURES

- 2' protective sleeve on wear point to extend sling life
- Easy to set up and rig through low-friction ring
- Husky Urethane™ coating for abrasion resistance

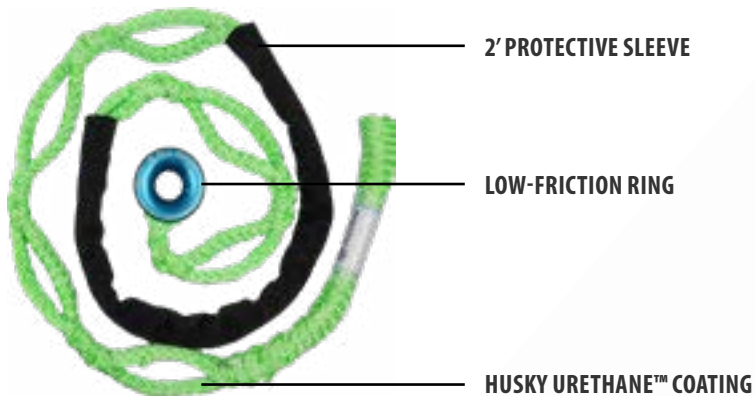



Meets or exceeds
ANSI Z133 Standard

HUSKY 12-STRAND™ EYE SLING

This sling provides the highest abrasion resistance, break strength, and energy absorption.

SKU	SIZE	WORKING LOAD LIMIT	COLOR
AG12SPES1210E1	1/2" x 10'	1,980 lbs	Red
AG12SPES1215E	1/2" x 15'	1,980 lbs	Red
AG12SPES5812E1	5/8" x 12'	2,880 lbs	Yellow
AG12SPES5816E1	5/8" x 16'	2,880 lbs	Yellow
AG12SPES3415E1	3/4" x 15'	3,780 lbs	Green
AG12SPES3425E1	3/4" x 25'	3,780 lbs	Green

FEATURES

- Protective sleeve doubles the life of your sling
- Polyester Husky Urethane™ for abrasion resistance
- Color coded for differentiation and visibility



HUSKY 12-STRAND™ DOUBLE HEAD EYE SLING

A 12-strand polyester coated in Husky Urethane™ and covered with a chafe sleeve.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SPES5812DMR	5/8" x 12'	2,880 lbs	11 lbs
AG12SPES5816DMR	5/8" x 16'	2,880 lbs	11 lbs
AG12SPES3412DLR	3/4" x 12'	3,780 lbs	11 lbs
AG12SPES3416DLR	3/4" x 16'	3,780 lbs	11 lbs
AG12SPES3420DLR	3/4" x 20'	3,780 lbs	11 lbs



HUSKY-12™ LOOPIE SLING

An adjustable 12-strand polyester sling with a ballistic nylon outer jacket at the eye for extended life.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SPLS12-2-5	1/2" 2-5'	2,227 lbs	3 lbs
AG12SPLS58-3-8	5/8" 3-8'	3,240 lbs	3.5 lbs
AG12SPLS34-3-9	3/4" 3-9'	4,252 lbs	3.75 lbs




REDIRECT SLING

Used for a low-stretch anchor point for arborists and utility contractors, specifically made of a ballistic nylon outer jacket at the eye and body for extended life.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SPRS384	3/8" x 4'	1,836 lbs	1 lb
AG12SPRS125	1/2" x 5'	1,980 lbs	1.5 lbs
AG12SPRS585	5/8" x 5'	2,880 lbs	2 lbs
AG12SPRS346	3/4" x 6'	3,780 lbs	4 lbs

FEATURES

- Protective sleeve on wear point to extend sling life
- Color coded for easy differentiation and visibility
- Husky Urethane™ coating from abrasion resistance

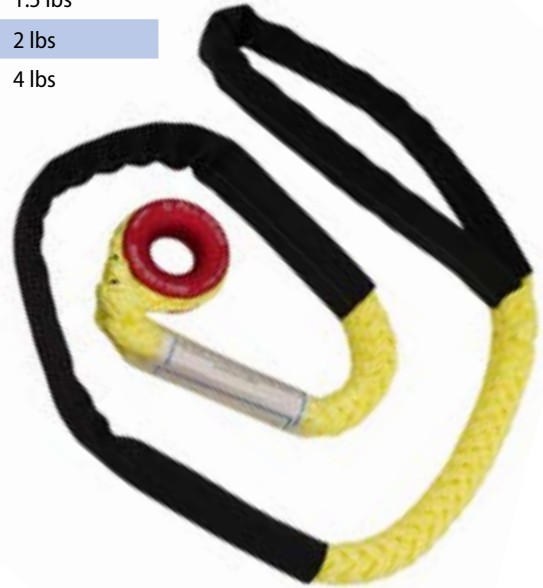

SINGLE HEAD WHOOPIE SLING

Adjustable polyester whoopie slings with a ballistic nylon outer jacket at the eye for extended life.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SPWS1236	1/2" x 3–6'	1,485 lbs	3 lbs
AG12SPWS5837	5/8" x 3–7'	2,160 lbs	4 lbs
AG12SPWS3448	3/4" x 4–8'	2,835 lbs	5 lbs





Meets or exceeds
ANSI Z133 Standard

DOUBLE HEAD WHOOPIE SLING

Adjustable polyester whoopie slings with a ballistic nylon outer jacket at the eye for extended life.



SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SPWS3448-DH	3/4" x 8'	2,835 lbs	5 lbs

RING-TO-RING SLING

12-strand polyester coated in Husky Urethane™ and covered with a chafe sleeve



SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SP12RR-30	1/2" x 30"	1,980 lbs	7 lbs
AG12SP58RR-40	5/8" x 40"	2,880 lbs	8 lbs
AG12SP34RR-50	3/4" x 50"	3,780 lbs	9 lbs

RING-TO-RING SLING WITH DOUBLE HEAD

A 12-strand polyester and 12-strand Multi Pro™ with a chafe sleeve for extra durability.



SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SP58RR-DH	5/8" x 5'	2,880 lbs	9 lbs
AG12SP34RR-DH	3/4" x 5'	3,780 lbs	11 lbs
AG12SP34MORR-DH	3/4" x 5'	3,780 lbs	11 lbs

SPIDER LEG SLING

Adjustable polyester whoopie slings with a ballistic nylon outer jacket at the eye for extended life.



SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AG12SPSL3812	3/8" x 12'	1,000 lbs	2 lbs
AG12SPSL3814	3/8" x 14'	1,000 lbs	2 lbs
AG12SPSL3816	3/8" x 16'	1,000 lbs	2 lbs
AG12SPSL1212	1/2" x 12'	2,000 lbs	2.5 lbs
AG12SPSL1214	1/2" x 14'	2,000 lbs	2.5 lbs
AG12SPSL1216	1/2" x 16'	2,000 lbs	2.5 lbs

PRO FORCE™ CRANE SLING

Specifically designed for crane use due to its extremely high ABS. constructed of our Pro Force™ Bull Rope, which has a polyester jacket and HMPE ultra weight molecular polyethylene core that gives this line exceptional tensile strength.

SKU	SIZE	WORKING LOAD LIMIT	COLOR
AGBRCS1220	1/2" x 20'	3,510 lbs	Purple
AGBRCS1225	1/2" x 25'	3,510 lbs	Purple
AGBRCS1230	1/2" x 30'	3,510 lbs	Purple
AGBRCS91620	9/16" x 20'	3,870 lbs	Neon Green
AGBRCS91625	9/16" x 25'	3,870 lbs	Neon Green
AGBRCS91630	9/16" x 30'	3,870 lbs	Neon Green
AGBRCS5820	5/8" x 20'	6,120 lbs	Light Blue
AGBRCS5825	5/8" x 25'	6,120 lbs	Light Blue
AGBRCS5830	5/8" x 30'	6,120 lbs	Light Blue

FEATURES

- Low stretch
- Great for static lifting and lowering
- Excellent 3-way spider systems



12" PROTECTIVE EYE WITH CHAFE SLEEVE

PRO FORCE™ BULL ROPE



LOAD ANGLE CHART

Angle factor must be applied to calculate the reduced sling capacity when lifting force is not at 90 degrees to the plane of the load.

Below shows the affects of different angles:





Meets or exceeds
ANSI Z133 Standard

ROPE CHAIN SLING

A sling with a 2' ballistic nylon outer jacket to cover any of the rig point eyes for extended life.

SKU	SIZE	WORKING LOAD LIMIT	WEIGHT
AGRCS12S-128	1/2" x 8'	1,980 lbs	3 lbs
AGRCS12S-5810	5/8" x 10'	2,880 lbs	3 lbs
AGRCS12S-3410	3/4" x 10'	3,780 lbs	3 lbs



FEATURES

- Protective sleeve doubles the life of your sling
- Polyester Husky Urethane™ for abrasion resistance
- Color coded for differentiation and visibility



ROPE CHAIN SLING


HMPE SUPER RIGGING LOOPS

Endless loops for rigging, stepping, holding, and bracing. made with your rigging needs in mind.

SKU	SIZE	RIGGING TENSILE	WEIGHT
AG32SS1224	1/2" x 24'	16,000 lbs	0.2 lbs
AG32SS1236	1/2" x 36'	16,000 lbs	0.3 lbs
AG32SS1248	1/2" x 48'	16,000 lbs	0.4 lbs

CHOKING ANGLE EFFECT

Angles of Choke	Sling Rated Load
120-180	75%
90-119	65%
60-89	55%
30-59	40%



HUSKY RIGGING LOOPS

Constructed of a polyester jacket, nylon core, and Husky Urethane™ coated.

SKU	SIZE	RIGGING TENSILE	WEIGHT
AGBRHL3840	3/8" x 40"	8,000 lbs	0.4 lbs
AGBRHL3860	3/8" x 60"	8,000 lbs	0.4 lbs
AGBRHL71640	7/16" x 40"	10,000 lbs	0.4 lbs
AGBRHL71660	7/16" x 60"	10,000 lbs	0.4 lbs



NYLON WORK LOOPS

Endless loops for stepping, holding, and bracing.

SKU	SIZE	END TO END	WEIGHT
AGNWL26	1" x 26"	7,000 lbs	0.4 lbs
AGNWL36	1" x 36"	7,000 lbs	0.5 lbs
AGNWL40	1" x 40"	7,000 lbs	0.6 lbs
AGNWL48	1" x 48"	7,000 lbs	0.6 lbs



POLYESTER ROUND SLING

More endless loops in diameters of 5/8" and 7/8"

SKU	DIAMETER	VERTICAL	CHOKER	BASKET
AGPRS584	5/8"	2,100 lbs	2,600 lbs	5,200 lbs
AGPRS784	7/8"	4,200 lbs	5,300 lbs	10,600 lbs





Meets or exceeds
ANSI Z133 Standard

BULLS EYE™

Built to be extremely slick and strong, through our blend of 50% polyethylene and 50% HMPE.

SKU	SIZE	AVG BREAK	PACKAGE
AGDPTL25180	2.5mm x 180'	450 lbs	24 Spools/Case
AGDPTL251000	2.5mm x 1,000'	450 lbs	4 Reels/Case

TARGET LINE™

Built to be extremely slick, through our blend of 100% Polyethylene

SKU	SIZE	AVG BREAK	PACKAGE
AGPTL18200-TARGET	1/8" x 200'	250 lbs	24 Spools/Case
AGPTL181000-TARGET	1/8" x 1,000'	250 lbs	Reels

JET SET™

Made to be strong and long lasting, with a firm braid throughout to avoid snagging and abrasion.

SKU	SIZE	AVG BREAK	PACKAGE
AGTL14180	1.4mm x 180'	330 lbs	24 Spools/Case
AGTL141000	1.4mm x 1,000'	330 lbs	Spool
AGTL175180	1.75mm x 180'	450 lbs	24 Spools/Case
AGTL1751000	1.75mm x 1,000'	450 lbs	Spool
AGTL22180	2.2mm x 180'	650 lbs	24 Spools/Case
AGTL221000	2.2mm x 1,000'	650lbs	Spool

TARGET LINE II™

Heavy duty and extremely slick, with striped pattern to avoid snagging and abrasion.

SKU	SIZE	AVG BREAK	PACKAGE
AGPTL532200	5/32" x 180'	650 lbs	24 Spools/Case
AGPTL5321000	5/32" x 1,000'	650 lbs	Reels

THROW LINE AND THROW WEIGHT COMBOS

SKU	THROW WEIGHT	THROW LINE
AGTB10BO	10oz (Orange)	
AGTB10-TL175180	10oz	1.75mm x 180' Jet Set
AGTB10- TL22180	10oz	2.2mm x 180' Jet Set
AGTB10- DPTL25180	10oz	2.5mm x 180' Bulls Eye
AGTB10-PTL18200	10oz	1/8" x 200' Target Line
AGTB12-W	12oz (Yellow and Black)	
AGTB12- TL175180	12oz	1.75mm x 180' Jet Set
AGTB12-TL22180	12oz	2.2mm x 180' Jet Set
AGTB12-DPTL175180	12oz	2.5mm x 180' Bulls Eye
AGTB12-PTL18200	12oz	2.5mm x 200' Target Line
AGTB14-W	14oz (Green and Black)	
AGTB14-TL175180	14oz	1.75mm x 180' Jet Set
AGTB14-TL22180	14oz	2.2mm x 180' Jet Set
AGTB14-DPTL25180	14oz	2.5mm x 180' Bulls Eye
AGTB14- PTL18200	14oz	1/8" x 200' Target Line
AGTB16-W	16oz (Red and Black)	
AGTB16-TL175180	16oz	1.75mm x 180' Jet Set
AGTB16-TL22180	16oz	2.2mm x 180' Jet Set
AGTB16-DPTL25180	16oz	2.5mm x 180' Bulls Eye
AGTB16-PTL18200	16oz	1/8" x 200' Target Line

100Z THROW WEIGHT

AGTB10BO





THROW LINES AND WEIGHTS

ARBORIST

03 KITS

KITS.....53





Meets or exceeds
ANSI Z133 Standard

TREE CLIMBING KITS

All Gear offers various all-in-one climbing kits, designed to simplify gear selection for both climber and supplier alike.

AGTCK-E

DESCRIPTION

11.2mm or 11.8mm x 15' Micro Pulley Work Positioning Lanyard

Adjustable Friction Saver 1/2" x 10'

Jet Set 1.75 x 180'

Tree Access ANSI ST Climbing Saddle

Tree Access SRT Chest Harness

Triple Action Aluminum Carabiners

Throw Bags

Rope Bag

10mm Prusik Eye to Eye

11.8mm x 200' Climbing Line with Spliced Eye

Turbofoot Ascender Right or Left

AGTCK-B

DESCRIPTION

Adjustable Friction Saver 1/2" x 10'

8mm Prusik Eye to Eye

Triple Action Aluminum Carabiners

Tree Access ANSI ST Climbing Saddle

Throw Bag

Target Line 1/8" x 200'

16-Strand Lanyard 1/2" x 10'

Rope Bag

1/2" x 150' Climbing Line

AGTCK-I

DESCRIPTION

Adjustable Friction Saver 1/2" x 10'

Positioning Lanyard 1/2" x 12'

Triple Action Aluminum Carabiners

8mm Prusik Eye to Eye

Tree Access ANSI ST Climbing Saddle

Throw Bag

Bulls Eye Throw 2.5mm x 180'

Line 1/8" x 200' 24-Strand Climbing Line with Spliced Eye

Rope Bag

04

UTILITIES & CRANES

CORDAGE.....55-57
SLINGS.....57





Meets or exceeds
ANSI Z133 Standard

100% HMPE SUPER SWIFT LINE

A great alternative to traditional wire rope—super strong yet lightweight. Available in custom lengths, with optional professionally spliced eyes.

SKU	DIAMETER	TENSILE
AG12SS516100E1	5/16"	15,300 lbs avg
AG12SS38100E1	3/8"	19,000 lbs avg
AG12SS716	7/16"	22,300 lbs avg
AG12SS12100E1	1/2"	38,000 lbs avg
AG12SS58150E1	5/8"	51,100 lbs avg

HUSKY UTILITY™ DOUBLE-BRAID WINCH LINES

This line, designed for towing and recovery, features nylon construction up to 1 inch and poly-over-poly construction above 1 inch, and is also commonly used as a winch line for utility trucks.

SKU	DIAMETER	TENSILE
AGDBC12600E2	1/2"	10,500 lbs avg
AGDBC34600E2	3/4"	23,000 lbs avg
AGDBC78600E2	7/8"	32,000 lbs avg
AGDBC1600E2	1"	34,200 lbs avg

3-STRAND TWISTED POLY-DAC HANDLINE

This 600-ft line is designed for cabling and is easy to splice.

SKU	DIAMETER	TENSILE
AGPD14600	1/4"	1,130 lbs avg
AGPD38600	3/8"	5,300 lbs avg
AGPD12600	1/2"	5,500 lbs avg
AGPD58600	5/8"	7,400 lbs avg
AGPD34600	3/4"	10,192 lbs avg
AGPD1600	1"	17,000 lbs avg

12-STRAND LOW-CONDUCT POLYOLEFIN DIELECTRIC LINE

This line, sold in 600' lengths, is commonly used for bucket and utility applications, with low conductivity to enhance safety for linemen near power lines.

SKU	DIAMETER	TENSILE
AG12SDE38600	3/8"	3,500 lbs avg
AG12SDE716600	7/16"	4,400 lbs avg
AG12SDE12600	1/2"	6,000 lbs avg
AG12SDE58600	5/8"	9,900 lbs avg

HANDLINE PRO

This 12-strand twisted polyester-over-polyolefin line, sold in 600' lengths, has low conductivity for added lineman safety and is used on buckets to easily raise and lower tools.

SKU	DIAMETER	TENSILE
AG12SC38600SC	3/8"	5,400 lbs avg
AG12SC12600SC	1/2"	9,300 lbs avg
AG12SC58600SC	5/8"	14,000 lbs avg
AG12SC34600SC	3/4"	17,000 lbs avg

HIGH STRENGTH 3-STRAND TWISTED COMPOSITE HANDLINE

Built with a 3-strand twisted composite design that features a 100% plied polyester jacket over a high-strength co-polymer core, making it about 20% stronger than standard poly-dac lines.

SKU	DIAMETER	TENSILE
AG3STHSC12600	1/2"	5,590 lbs avg
AG3STHSC58600	5/8"	10,450 lbs avg



Meets or exceeds
ANSI Z133 Standard

HOLLOW BRAID POLYPROPYLENE

A high-strength, floating rope with good elasticity, 15–20% stretch, excellent rot resistance, low electrical conductivity, and full strength retention when wet.

SKU	LENGTH	TENSILE
AGHBPP141000	1/4" x 1000'	990 lbs avg
AGHBPP381000	3/8" x 1000'	2,100 lbs avg
AGHBPP121000	1/2" x 1000'	2,675 lbs avg

POLYPROPYLENE BUCKET PULLING TWINE

Features a 6,500 ft of white line with a distinct blue chaser for easy visibility—all in one bucket.

SKU	LENGTH	TENSILE
AGPPPL6500B	6,500 FT (ONE BUCKET)	210–230 lbs avg

BRAIDED UTILITY HANKS

Made with a braided polyester jacket over a solid straight polyester core, built for durability, water resistance, and buoyancy; they're ideal for general-purpose use — great tie down rope for trailers and landscapers.

SKU	LENGTH	TENSILE
AGUH316100	3/16" x 100'	300 lbs avg
AGUH14100	1/4" x 100'	600 lbs avg
AGUH3850	3/8" x 50'	1,200 lbs avg
AGUH1250	1/2" x 50'	3,000 lbs avg
AGUH12100	1/2" x 100'	3,000 lbs avg
AGUH58100	5/8" x 100'	7,000 lbs avg

SOLID BRAID MULTIFILAMENT POLYPROPYLENE

A durable, lightweight cord designed for excellent knot-holding and resistance to rot, mildew, and moisture. Its smooth handling and versatility make it reliable for a wide range of general-purpose applications.

SKU	LENGTH	TENSILE
AGSBMPP38600	3/8" x 600'	1,500 lbs avg

DOUBLE BRAID COMPOSITE HIGH FORCE PULLING LINE

Perfect for winch line applications, this product delivers strength and reliability. Spliced eyes added on one or both ends for easily installation.

SKU	DIAMETER	TENSILE
AGDBC916600E2	9/16"	14,000 lbs avg
AGDBC58600E2	5/8"	19,500 lbs avg
AGDBC34600E2	3/4"	23,000 lbs avg
AGDBC78600E2	7/8"	32,000 lbs avg
AGDBC1600E2	1"	

HIGH STRENGTH 3-STRAND TWISTED CO-POLYMER

Made from 100% co-polymer fibers with a red tracer, offering very high breaking strength and durability, designed for demanding utility and rigging applications.

SKU	LENGTH	TENSILE
AG3STCP12600	1/2" x 600'	6,156 lbs avg
AG3STCP58600	5/8" x 600'	10,693 lbs avg
AG3STCP34600	3/4" x 600'	12,103 lbs avg
AG3STCP1600	1" x 600'	22,785 lbs avg
AG3STCP2600	2" x 600'	78,530 lbs avg

SOLID BRAID NYLON

A tightly woven 100% nylon line with high strength, good elasticity, and excellent abrasion, UV, and water resistance—ideal for mason line and pole saw cord.

SKU	LENGTH	TENSILE
AGSBN3161000	3/16" x 1000'	800 lbs avg
AGSBN141000	1/4" x 1000'	1,240 lbs avg
AGSBN5161000	5/16" x 1000'	1,931 lbs avg
AGSBN38500	3/8" x 500'	2,475 lbs avg
AGSBN381000	3/8" x 1000'	2,475 lbs avg
AGSBN12500	1/2" x 500'	3,960 lbs avg
AGSBN121000	1/2" x 1000'	3,960 lbs avg

3-STRAND TWISTED POLYPROPYLENE

A lightweight, floating 3-strand polypropylene rope with good strength and elasticity, ideal for general-purpose and medium-duty applications.

SKU	LENGTH	TENSILE
AG3STPP3161200	3/16" x 1200'	720 lbs avg
AG3STPP14600	1/4" x 600'	1,130 lbs avg
AG3STPP38600	3/8" x 600'	2,440 lbs avg
AG3STPP12600	1/2" x 600'	3,780 lbs avg
AG3STPP58600	5/8" x 600'	5,600 lbs avg
AG3STPP34600	3/4" x 600'	7,650 lbs avg
AG3STPP1600	1" x 600'	12,660 lbs avg

12-STRAND ADJUSTABLE POLYESTER TRANSFORMER SLINGS

A low-stretch lifting sling made from 12-strand polyester, built with ballistic nylon wear sleeves at key points and coated with Husky Urethane™ for excellent abrasion, chemical, and UV resistance.

SKU	LENGTH	WORKING LOAD LIMIT	BASKET RATING	CHOKER RATING
AGTS38-24-50B	3/8"	960 lbs avg	1,920 lbs avg	768 lbs avg
AGTS38-24-72B	3/8"	960 lbs avg	1,920 lbs avg	768 lbs avg
AGTS12-24-50R	1/2"	1,760 lbs avg	3,520 lbs avg	1,408 lbs avg
AGTS12-24-72R	1/2"	1,760 lbs avg	3,520 lbs avg	1,408 lbs avg
AGTS58-24-50Y	5/8"	2,560 lbs avg	5,120 lbs avg	2,048 lbs avg
AGTS58-24-72Y	5/8"	2,560 lbs avg	5,120 lbs avg	2,048 lbs avg
AGTS34-24-50G	3/4"	3,360 lbs avg	6,720 lbs avg	2,688 lbs avg
AGTS34-24-72G	3/4"	3,360 lbs avg	6,720 lbs avg	2,688 lbs avg

3-STRAND TWISTED NYLON

Soft yet strong, with medium elongation for dependable shock absorption and durable performance in general-purpose, marine, and rigging uses.

SKU	LENGTH	TENSILE
AG3STN516600	5/16" x 600'	2,300 lbs avg
AG3STN38600	3/8" x 600'	3,340 lbs avg
AG3STN12600	1/2" x 600'	5,750 lbs avg
AG3STN58600	5/8" x 600'	9,350 lbs avg
AG3STN34600	3/4" x 600'	12,800 lbs avg
AG3STN1600	1" x 600'	22,600 lbs avg

3-STRAND TWISTED MANILA

3-strand twisted manila rope is a natural fiber line with moderate strength and low stretch, offering a classic look and solid grip—perfect for decorative, maritime, or landscaping uses.

SKU	LENGTH	TENSILE
AG3STM38600	3/8" x 600'	1,220 lbs avg
AG3STM12600	1/2" x 600'	2,380 lbs avg
AG3STM58600	5/8" x 600'	3,960 lbs avg
AG3STM34600	3/4" x 600'	4,000 lbs avg
AG3STM78600	7/8" x 600'	6,900 lbs avg

05 MISC





Meets or exceeds
ANSI Z133 Standard

ROPE BAGS

Durable, weather-resistant storage solutions that keep ropes organized, tangle-free, and protected for outdoor, marine, or industrial use.

SKU	COLOR
AGRBBS	Grey
AGRBBSRR	Maroon

GREY FEATURES

- 16" tall and 12" diameter
- Holds 200' of 1/2" line of rope
- Great for climbing rope
- Includes 4 gear loops and breathable grommet on the bottom of the bag.

MAROON FEATURES

- 17" tall and 13" diameter
- Holds 200' of 3/4" line of rope
- Great for rigging rope
- Includes breathable grommet on the bottom of the bag and nickel-plated D-ring and duffel bag style handle.



BRAIDED NYLON SEINE TWINE

A high-strength, abrasion-resistant cord designed for reliable performance in fishing, netting, and demanding outdoor tasks.

SKU	LENGTH
AGBNST18250W	#18 x 250'
AGBNST18500W	#18 x 500'
AGBNST181000W	#18 x 1000'
AGBNST18250O	#18 x 250'
AGBNST18500O	#18 x 500'
AGBNST181000O	#18 x 1000'
AGBNST18250P	#18 x 250'
AGBNST18500P	#18 x 500'
AGBNST181000P	#18 x 1000'
AGBNST18250Y	#18 x 250'
AGBNST18500Y	#18 x 500'
AGBNST181000Y	#18 x 1000'

POLYESTER WAXED TWINE

A durable, water-resistant cord designed for secure tying and long-lasting outdoor or craft use.

SKU	LENGTH
AGPWT8P1200	1,200'

SOLID BRAIDED WEEPING CORD

Durable, water-resistant cord engineered for controlled water drainage and reliable performance in outdoor and marine applications.

SKU	LENGTH	TENSILE
AGSBC732100	#7 or 7/32" x 100'	340 lbs avg
AGSBC14100	#8 or 1/4" x 100'	750 lbs avg
AGSBC516100	#10 or 5/16" x 100'	1,200 lbs avg
AGSBC38100	#12 or 3/8" x 100'	1,475 lbs avg
AGSBC12100	#16 or 1/2" x 100'	1,700 lbs avg

TWISTED NYLON SEINE TWINE

Strong, flexible cord ideal for heavy-duty fishing, netting, and general-purpose outdoor applications.

SKU	LENGTH
AGNST18275W	#18 x 275'
AGNST18550W	#18 x 550'
AGNST181090W	#18 x 1090'
AGNST18275O	#18 x 275'
AGNST18550O	#18 x 550'
AGNST181090O	#18 x 1090'
AGNST18275P	#18 x 275'
AGNST18550P	#18 x 550'
AGNST181090P	#18 x 1090'
AGNST18275Y	#18 x 275'
AGNST18550Y	#18 x 550'
AGNST181090Y	#18 x 1090'

BRANCH SAVER™

Our adjustable system for bracing limbs – able to help heal limbs after the worst weather conditions.

SKU	SIZE	TENSILE	QUANTITY
AGHBP38300B	3/8"	3,000 lbs avg	Reel
AGHBP12300B	1/2"	6,100 lbs avg	Reel
AGHBP34300B	3/4"	10,600 lbs avg	Reel

ELASTIC SHOCK CORD WITH PLASTIC COATED HEAVY DUTY "J" HOOKS

Versatile, stretchable cord designed for secure fastening and reliable hold in outdoor, marine, or cargo applications.

SKU	LENGTH	COLOR
AGCS12	1/2" x 12"	Red with Black
AGSC3824	3/8 x 24"	Blue with Black
AGSC3836	3/8" x 36"	Blue with Black



Meets or exceeds
ANSI Z133 Standard

QUICK CONNECT™

Lightweight, high-strength HMPE accessory that enables fast, tool-free rigging connections.

SKU	SIZE	TENSILE	QUANTITY
AGQC5168	5/16" x 8"	15,300 lbs avg	2 pack
AGQC388	3/8" x 8"	19,000 lbs avg	2 pack
AGQC1212	1/2" x 12"	38,000 lbs avg	2 pack
AGQC1232	1/2" x 32"	75,000 lbs avg	2 pack

RACHET STRAPS

Heavy-duty, adjustable tie-downs with a strong ratcheting mechanism to keep loads secure on trucks, trailers, boats, and outdoor gear.

SKU	SIZE	BREAK STRENGTH	HANDLE TYPE	HOOK TYPE
AGRS116SH	1" x 16'	2,500 lbs	Heavy Duty	"S" Hook
AGRS116HD	1" x 16'	3,000 lbs	Heavy Duty	Wire Hook with "D" Ring
AGRS230WHL	2" x 30'	10,000 lbs	Long Handle	Wire Hook
AGRS230FHL	2" x 30'	10,000 lbs	Long Handle	Flat Hook
AGRS330FHL	3" x 30'	10,000 lbs	Long Handle	Flat Hook

ROPE BAGS

Durable, weather-resistant storage solutions that keep ropes organized, tangle-free, and protected for outdoor, marine, or industrial use.

SKU	COLOR
AGRBS	Green
AGRBSB	Blue

RUBBER TARP TIE DOWN-EPDM

Stretchable, durable cord designed to securely fasten tarps and covers in outdoor, marine, and industrial applications.

SKU	LENGTH
AGRTRD10	10"
AGRTRD21	21"
AGRTRD31	31"
AGRTRD41	41"

UNLEASH YOUR CLIMBING AND RIGGING SKILLS

Expert advice and dependable service -
connect with us to get started today.



www.AllGearInc.com



847-564-9016



847-564-9017



info@allgearinc.com

3021 COMMERCIAL AVE, NORTHBROOK, IL 60062



ALLGEAR

POWERED BY RBI