


POLYETHYLENE HOLDING AND SEPTIC TANKS

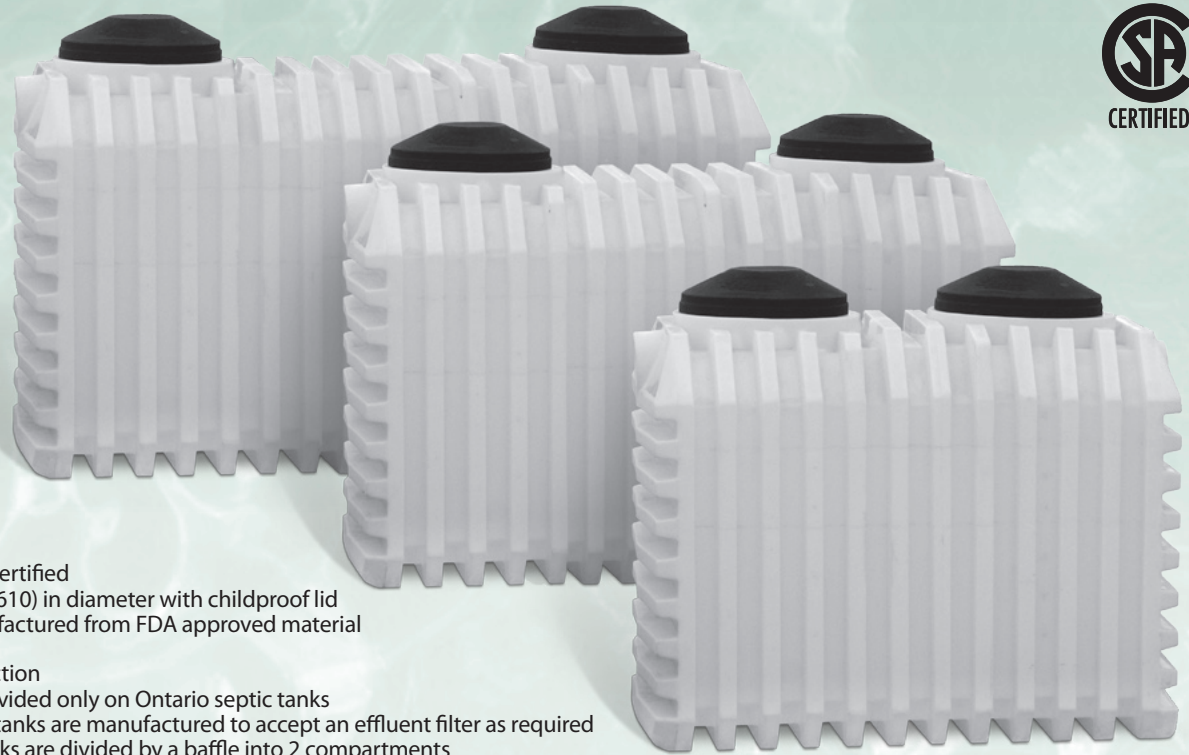

- All tanks are CSA certified
- Manways are 24" (610) in diameter with childproof lid
- Water tanks manufactured from FDA approved material for drinking water
- Seamless construction
- Two manways provided only on Ontario septic tanks
- All Ontario septic tanks are manufactured to accept an effluent filter as required
- Ontario Trickle tanks are divided by a baffle into 2 compartments

POLYETHYLENE HOLDING AND SEPTIC TANKS

Model	Nominal Capacity Imp.Gal. (Litres)	Length In. (mm)	Width In. (mm)	Height In. (mm)	Inlet Height In. (mm)	Outlet Height In. (mm)	Trickle Retention Capacity Imp. Gal. (Litres)	Holding/Water Imp. Gal. (Litres)
P-750*	750 (3409)	80" (2032)	50" (1270)	61" (1550)	56" (1422)	54" (1372)	675 (3065)	750 (3400)
P-900*	900 (4091)	99" (2515)	50" (1270)	61" (1550)	56" (1422)	54" (1372)	810 (3680)	900 (4100)
P-1150*	1150 (5228)	124" (3150)	50" (1270)	61" (1550)	56" (1422)	54" (1372)	1035 (4705)	1150 (5225)
P-1350*	1350 (6137)	143" (3632)	50" (1270)	61" (1550)	56" (1422)	54" (1372)	1215 (5225)	1350 (6150)

*Suffix H (Holding), T (Trickle), or W (Water), will designate style of tank.

ONTARIO TRICKLE TANKS (2 Compartment)

Model	Nominal Capacity Imp.Gal. (Litres)	Length In. (mm)	Width In. (mm)	Height In. (mm)	Retention Capacity Imp. Gal. (Litres)
P900-2T	900 (4091)	99" (2515)	50" (1270)	61" (1550)	810 (3680)
P1150-2T	1150 (5228)	124" (3150)	50" (1270)	61" (1550)	1035 (4705)
P1350-2T	1350 (6137)	143" (3632)	50" (1270)	61" (1550)	1215 (5225)



POLYETHYLENE PUMP-OUT CHAMBER 125 Gal. (570 L)

- 40" (1015) Diameter
- 4" (100) Inlet
- Optional 24" (610) High Manway Extension

Model

P140-PC	(Tank only no manway extension)
P140-PCMHS	(Tank c/w 24" manway extension)

ACCESSORIES

Model


P24-MHS	24" (610) Tall Manway Ext Sleeve
TP-LID-24	24" (610) Diameter Lid
FT-00011	Effluent Filter

LOW PROFILE CISTERN AND HOLDING TANKS




ABOVE GROUND

	Capacity Imp. Gal (Litres)	Length In. (mm)	Width In. (mm)	Height In. (mm)
E 305 LP	305 (1385)	73" (1854)	59" (1499)	25" (635)
G 500 LP	500 (2270)	80" (2030)	88" (2235)	23" (585)
G 900 LP	900 (3995)	136" (3455)	88" (2235)	23" (585)
G 1000 LP	1000 (4545)	152" (3860)	88" (2235)	23" (585)

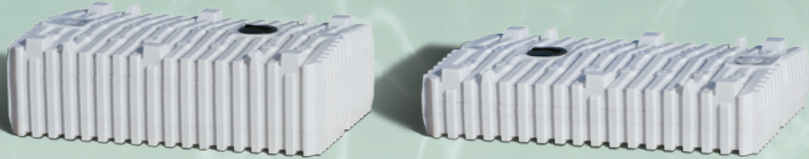

LP 1250A	1250 (5675)	152" (3860)	94" (2390)	31" (785)
LP 1750A	1750 (7945)	152" (3860)	94" (2390)	42" (1065)
LP 2000A	2000 (9090)	152" (3860)	94" (2390)	47" (1195)

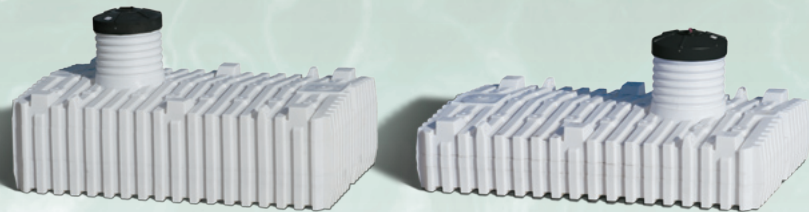

BELOW GROUND



LP 1250B	1250 (5675)	152" (3860)	94" (2390)	31" (785)
LP 1750B	1750 (7945)	152" (3860)	94" (2390)	42" (1065)
LP 2000B	2000 (9090)	152" (3860)	94" (2390)	47" (1195)

ONTARIO APPROVED FIBERGLASS SEPTIC TANKS

GUARDIAN 1-PIECE TANKS



Always confirm code requirements with your local regulatory authority.

SHALLOW BURIAL TANKS - TO MAXIMUM 2' (609) OVERBURDEN
DEEP BURIAL TANKS - CONTACT FACTORY FOR PRICING

TANK TYPE

NOMINAL CAPACITY	Depth	PUMP-OUT	PUMP-OUT	TRICKLE	SIPHON
		200 Gal. (910 Litres) Pump-Out Chamber	90 Gal. (410 Litres) Pump-Out Chamber		
800 (3640) 3 Bedrooms	Shallow	G-800-2P2/200	G-800-2P2	G-800-2T2	G-800-2S2
1000 (4545) 4 Bedrooms	Shallow	G-1000-2P2/200	G-1000-2P2	G-1000-2T2	G-1000-2S2
1200 (5455) 4+ Bedrooms	Shallow	G-1200-2P2/200	G-1200-2P2	G-1200-2T2	G-1200-2S2
1400 (6365) 4+ Bedrooms	Shallow	G-1400-2P2/200	G-1400-2P2	G-1400-2T2	G-1400-2S2
1600 (7275) 4+ Bedrooms	Shallow	G-1600-2P2/200	G-1600-2P2	G-1600-2T2	G-1600-2S2

POLYETHYLENE HAULING AND STORAGE TANKS

Model	Capacity Imp. Gal (Litres)	Diameter In. (mm)	Height In. (mm)
-------	-------------------------------	----------------------	--------------------



LR162	250 (1136)	64" (1625)	30" (762)
LR165	420 (1910)	64" (1625)	45" (1143)



E-15W	15 (68)	15¼" (387)	22½" (572)
E-25W	25 (114)	19¼" (489)	19¼" (489)
E-50W	50 (227)	24½" (622)	37¼" (946)
E-75W	75 (340)	28½" (718)	47½" (1206)
E-100W	100 (455)	23½" (597)	66" (1676)
E-125W	125 (568)	29½" (749)	64" (1625)
E-200W	200 (910)	58" (1475)	30" (760)
E-250PV	250 (1135)	36" (915)	84" (2130)



E-250WS	250 (1135)	61"(L) x 30"(W)	48" (1220)
E-325WS	325 (1476)	61"(L) x 30"(W)	60" (1520)



LR171	915 (4154)	86" (2184)	53" (1345)
LR175B**	1250 (5675)	86" (2184)	70" (1778)
LR177W	1250 (5675)	86" (2184)	70" (1778)
LR188HD*	1250 (5675)	86" (2184)	70" (1778)
E-2000V	2000 (9092)	95" (2413)	87" (2210)
E-2500V	2500 (11365)	95" (2413)	107" (2718)
E-3000V	3000 (13638)	102" (2591)	126" (3200)
E-5000V	5000 (22730)	102" (2591)	182" (4623)

*LR 188HD - HEAVY DUTY

**LR 175B - BLACK (NOT SUITABLE FOR POTABLE WATER)

Model	Capacity Imp. Gal (Litres)	Diameter In. (mm)	Length In. (mm)
-------	-------------------------------	----------------------	--------------------



LR104	25 (113)	23" (584)	18" (457)
LR106	50 (227)	23" (584)	37" (939)
LR112	100 (455)	29" (737)	45" (1143)
LR126	175 (795)	38" (965)	51" (1295)
LR135	325 (1475)	42" (1067)	80" (2032)
LR140	500 (2275)	48" (1220)	83" (2110)
LR145	750 (3410)	54" (1372)	101" (2565)
LR150	950 (4319)	65" (1651)	102" (2591)