




WEB: WWW.HLHALFLOG.COM
E-MAIL: SALES@HLHALF-LOG.COM
TELEPHONE: (715) 378-2640
FAX: (715) 378-2697

11290 SOUTH MERTZIG PARKWAY
P.O. BOX 222
SOLON SPRINGS, WI 54873



H&L PRODUCTS

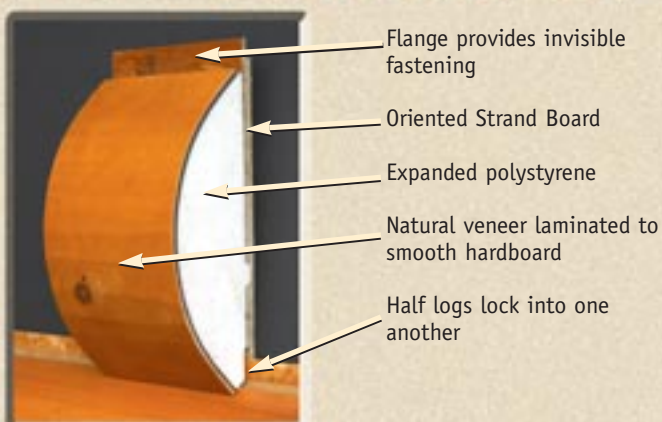

Diameter	Log Cabin Siding	10"	12"	14"	16"
Stack Height	6 1/2"	8"	10"	12"	14"
Thickness	1 1/2"	3"	3 1/2"	4 1/2"	5 1/2"

- H&L Half-Logs, available in 4 diameter sizes, 94" lengths (see diagram)
- Ceiling beams in four sizes: 10, 12, 16 and 20 inch, 94" lengths
- Four corner systems (round post, square timber, saddle notch, and butt and pass)
- Three veneer choices (smooth knotty pine, peeled knotty pine and embossed hardboard)

- Suncoat™ High Polymer Acrylic Stain (four standard colors: Amber Ice, Sandy Creek, Autumn Straw, Auburn Ridge)
- Pre-finished 2"x8" log cabin siding
- Caulk, screws, chinking and trim
- Large diameter solid log detailing: trusses, posts, headers, purlins and rafters
- Interior H&L Half-Logs
- Custom veneer options
- Exterior insulation finish system (EIFS)
- Custom pre-finishing services (for wood siding products)
- Custom H&L Half-Logs to 20" diameter
- Chinked style H&L Half-Logs



ENGINEERED LOG SIDING FOR RESIDENTIAL & COMMERCIAL BUILDINGS



H&L INDUSTRIES



H&L Half-Log ...
for high-value
structures. The large
diameter creates
dramatic curb appeal
and higher resale
values. Our system
results in savings on
construction costs,
lower manpower
requirements, less
heavy lifting, lower
injury rate, faster
installation, and the
ability to transport
products to remote
building sites.

**H&L
HALF-LOG™**
*for new
commercial
construction or
remodeling.*

Commercial

Wisconsin Dells Lodge



16" Peeled Pine with Saddle Notch corners over ICF construction - Sandy Creek



12" Peeled Pine with Saddle Notch corners - Auburn Ridge



12" Cedar
Embossed
Hardboard
with Round
corner
posts -
Solid
Olympic
stain



12" Peeled Pine with Saddle Notch corners - Auburn Ridge

H&L HALF-LOG™

- **Light Weight**
 - 80% lighter than solid log profiles of the same size
 - structural design cost savings: standard footings and walls
- **Expanded Polystyrene (EPS) Core**
 - four times greater R-values than solid log siding
 - additional insulation for lower energy costs, warmer in winter, cooler in summer
 - effective noise reduction, resulting in quiet rooms.
- **Thick, Natural Wood Veneers**
 - traditional log look using 80% less timber
 - greater consistency for faster installation and less waste
 - hidden fastening system for authentic look, enabling siding to be re-used
- **Factory Pre-Finishing**
 - stunning high quality and consistent finish, includes one base coat and three top coat applications
 - one field coat application after installation, followed by an easy long-term maintenance schedule
 - option for factory-applied final field coat

Residential

12" Smooth Pine with Saddle Notch corners - Sandy Creek



H&L INDUSTRIES, INC. is the manufacturer and leading provider of large-diameter, log building systems that conserve valuable timber and energy resources. Company headquarters are located on 12 acres in the northern Wisconsin community of Solon Springs. The 17,000 square-foot complex includes a state-of-the-art pre-finishing facility.

Since 1991, H&L Half-Log siding has been installed on a wide range of commercial and residential projects, including resorts, lodges, motels, restaurants, retail shops, office buildings, condominiums, homes and cabins.

After



Before



The patented H&L Half-Log is an innovative laminated engineered wood product that is easy to install.

Combining sheathing, siding pre-finishing and insulation into a single application step, the H&L Half-Log system saves on material and labor costs.

**H&L
HALF-LOG™**
*for new
residential
construction or
remodeling.*

